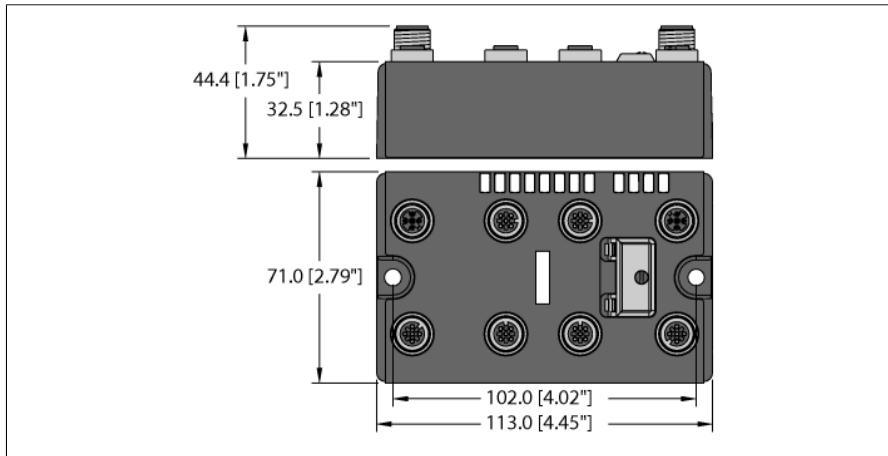


BL compact™ multiprotocol fieldbus station for Industrial Ethernet

4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage

BLCEN-4M12MT-4AI4AO-VI



- On-machine Compact fieldbus I/O block
- EtherNet/IP™, Modbus® TCP, or PROFINET slave
- Integrated Ethernet Switch
- 10 Mbps / 100 Mbps supported
- Two 4-pole M12, D-coded, connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 4 analog inputs for current or voltage
- 0/4...20 mA or -10/0...+10 VDC (selectable per channel)
- 4 analog voltage outputs
- -10/0...+10 VDC

Type	BLCEN-4M12MT-4AI4AO-VI
ID	6811451
Nominal system voltage	24 VDC
System power supply	Via auxiliary power
Voltage supply connection	2 x M12, 5-pin
Admissible range Vi	11...30 VDC
Nominal current Vi	175 mA
Max. current Vi	1 A
Admissible range Vo	11...30 VDC
Nominal current Vo	50 mA
Max. current Vo	4 A
Fieldbus transmission rate	10/100 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	1...92
	0 (192.168.1.254)
	93 (BOOTP)
	94 (DHCP)
	95 (PGM)
	96 (PGM-DHCP) *recommended for PROFINET
	97...98 (manufacturer specific)
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
	4-pole, D-coded
Protocol detection	automatic
Web server	Integrated
Service interface	Ethernet
Vendor ID	48
Product type	12
Product code	11451
Modbus TCP	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	6
Input Data Size	max. 6 register
Input register start address	0 (0x0000 hex)
Output Data Size	max. 4 register
Output register start address	2048 (0x0800 hex)

BL compact™ multiprotocol fieldbus station for Industrial Ethernet

4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage

BLCEN-4M12MT-4AI4AO-VI

Ethernet/IP

Addressing	acc. to EtherNet/IP specification
Device Level Ring (DLR)	supported
Class 1 connections (CIP)	6
Input Assembly Instance	103
Input Data Size	9 INT
Output Assembly Instance	104
Output Data Size	4 INT
Configuration Assembly Instance	106
Configuration Size	0
Comm Format	Data - INT

PROFINET

Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
Input Data Size	max. 8 BYTE
Output Data Size	max. 8 BYTE

Analog inputs

Operating modes	from 4AI4AO-VI
Type of input diagnostics	0/4 ... 20 mA or -10/0 ... 10 VDC
Sensor supply	Channel diagnostics
Input resistance	24 VDC, 1 amp max.
Maximum limiting frequency analog	Current: < 0.065 KΩ, Voltage: < 225 KΩ
Basic fault limit at 23 °C	< 20 Hz
Repeatability	< 0.3 %
Temperature coefficient	< 0.05 %
Resolution	< 300 ppm / °C of full scale
Measuring principle	16 Bit
Measurement display	Sigma Delta
	16 bit signed integer
	12 bit full range left-justified

Analog outputs

Operating modes	from 4AI4AO-VI
Type of output diagnostics	-10/0 ... 10 V
Sensor supply	Channel diagnostics
Load resistance, resistive	24 VDC, 250 mA per channel
Load resistance, capacitive	> 1 kΩ
Transmission frequency	< 1 μF
Basic fault limit at 23 °C	< 100 Hz
Repeat accuracy	< 0.3 %
Temperature coefficient	< 0.05 %
Resolution	< 300 ppm/°C of full scale
Measured-value display	16 bit
	16 bit signed integer
	12 bit full range left-justified

BL compact™ multiprotocol fieldbus station for Industrial Ethernet

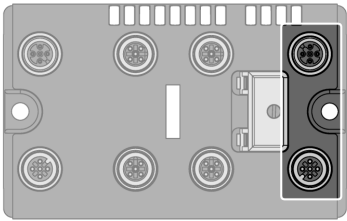
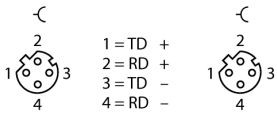
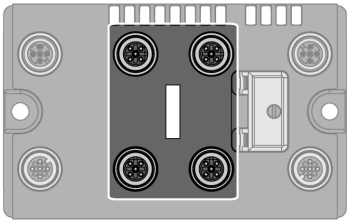

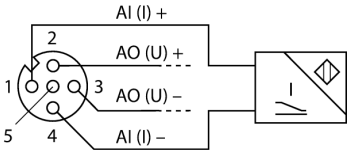
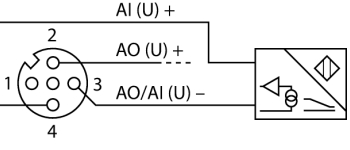
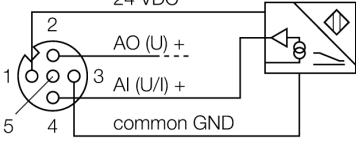
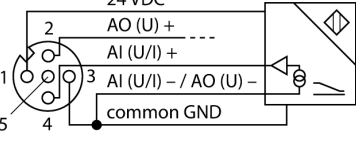
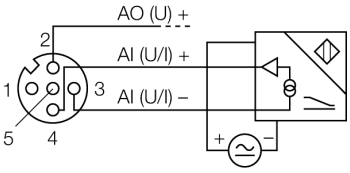
4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage

BLCEN-4M12MT-4AI4AO-VI


Dimensions	113 x 71 x 32.5 mm
Mounting	2 × 5.4 mm diameter holes, 1.7 Nm torque
Weight	390 ± 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	Acc. to IEC 61131-2
MTTF	110 years
MTTF note	acc. to SN 29500 (Ed. 99) 20 °C
Approvals and certificates	CE, cULus, Class I Div.2

BL compact™ multiprotocol fieldbus station for Industrial Ethernet
4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage
BLCEN-4M12MT-4AI4AO-VI

Pinning and wiring diagram

	<p>Ethernet Fieldbus cable (IP67 example): RSSD RSSD 441-2M ID number U-02482 or RSSD-RSSD-441-2M/S2174 ID number 6914218</p>	<p>Pin assignment (M12, D-coded)</p> 
	<p>Analog Inputs and Outputs Extension cable (example): RK 4.5T-2-RS 4.5T/S653 ident-no. U2187-09 or RKC4.5T-2-RSC4.5T/TEL ident-no. 6625212</p>	<p>Pin Assignment</p>  <p>2-wire Technology (Current)</p>  <p>2-wire connection (voltage)</p>  <p>3-wire connection</p>  <p>4-wire Technology</p>  <p>4-wire connection (external voltage supply)</p> 


BL compact™ multiprotocol fieldbus station for Industrial Ethernet
4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage
BLCEN-4M12MT-4AI4AO-VI



Auxiliary Power

Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

Pin Assignment



BL compact™ multiprotocol fieldbus station for Industrial Ethernet

4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage

BLCEN-4M12MT-4AI4AO-VI

Station LED status

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
BUS		OFF	Power Off
	GREEN	ON	Connected to Master
	GREEN	FLASHING	Ready
	GREEN	FLASHING 3x (1Hz)	ARGEE Running
	RED	ON	Error
	RED	FLASHING	WINK
	YELLOW	ON	DHCP/BOOTP Search
LNK/ACT		OFF	No Link
	GREEN	ON	Link
	GREEN	FLASHING	Traffic
	YELLOW	ON	100 Mbit Linked

I/O LED status

LED	Color	Status	Description
D *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active
AI channels 0...3		OFF	Channel inactive
	GREEN	ON	Channel active
	GREEN	FLASHING (0.5 Hz)	Underflow diagnostics
	GREEN	FLASHING (4 Hz)	Overflow diagnostics
AO channels 4...7			Not connected (The analog outputs do not have a LED)

* D LED also indicates gateway diagnostics

BL compact™ multiprotocol fieldbus station for Industrial Ethernet

4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage

BLCEN-4M12MT-4AI4AO-VI

Process Data Mapping of Each Protocol

EtherNet/IP™ I/O & Diagnostics Data Mapping

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
AI 1 ₀	0	AI 1 ₀ LSB							
	1	AI 1 ₀ MSB							
AI 1 ₁	2	AI 1 ₁ LSB							
	3	AI 1 ₁ MSB							
AI 1 ₂	4	AI 1 ₂ LSB							
	5	AI 1 ₂ MSB							
AI 1 ₃	6	AI 1 ₃ LSB							
	7	AI 1 ₃ MSB							
Diagnostics	8	Module number reporting diagnostic data							
	9	Replace Station	-	Diagnostics Active	-	-	-	-	-
Slot 1 (ref. Byte 8)	10	Hardware Failure	-	-	-	AI 1 ₀ Overflow/Underflow	-	Wire Break AI 1 ₀ (4...20 mA range only)	Range Error AI 1 ₀
	11	Hardware Failure	-	-	-	AO 1 ₀ Overflow/Underflow	-	-	Range Error AO 1 ₀
	12	Hardware Failure	-	-	-	AI 1 ₁ Overflow/Underflow	-	Wire Break AI 1 ₁ (4...20 mA range only)	Range Error AI 1 ₁
	13	Hardware Failure	-	-	-	AO 1 ₁ Overflow/Underflow	-	-	Range Error AO 1 ₁
	14	Hardware Failure	-	-	-	AI 1 ₂ Overflow/Underflow	-	Wire Break AI 1 ₂ (4...20 mA range only)	Range Error AI 1 ₂
	15	Hardware Failure	-	-	-	AO 1 ₂ Overflow/Underflow	-	-	Range Error AO 1 ₂
	16	Hardware Failure	-	-	-	AI 1 ₃ Overflow/Underflow	-	Wire Break AI 1 ₃	Range Error AI 1 ₃
17	Hardware Failure	-	-	-	AO 1 ₃ Overflow/Underflow	-	-	Range Error AO 1 ₃	
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
AO 1 ₀	0	AO 1 ₀ LSB							
	1	AO 1 ₀ MSB							
AO 1 ₁	2	AO 1 ₁ LSB							
	3	AO 1 ₁ MSB							
AO 1 ₂	4	AO 1 ₂ LSB							
	5	AO 1 ₂ MSB							
AO 1 ₃	6	AO 1 ₃ LSB							
	7	AO 1 ₃ MSB							

Legend:

MR	Measured Value out of range	FCE	Force Mode Enabled
WB	Wire break (4-20 mA only)	CFG	Configuration Error
OFU	Overflow/Underflow	COM	Modulebus Configuration Error
HW	Hardware Error	VI LOW	Voltage Field Supply Usys
OVR	Output value out of range	VO LOW	Voltage Field Supply Ui
OFU	Overflow/Underflow	DIA	Module Diagnostics Available

Modbus® TCP Register Mapping

	REG	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs (RO)	0x0000	AI 1 ₀															
	0x0001	AI 1 ₁															
	0x0002	AI 1 ₂															
	0x0003	AI 1 ₃															
Status (RO)	0x0004	-	FCE	-	-	CFG	COM	VI low	-	VO low	-	-	-	-	-	-	DIA

BL compact™ multiprotocol fieldbus station for Industrial Ethernet

4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage

BLCEN-4M12MT-4AI4AO-VI


Diag. (RO)	0x0005	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S1 DIA
Outputs (RW)	0x0800	AO 1 ₀															
	0x0801	AO 1 ₁															
	0x0802	AO 1 ₂															
	0x0803	AO 1 ₃															
I/O Diag. (RO)	0xA000	HWA0	-	-	-	OFUAC	-	-	OVRACHWAI	-	-	-	OFUAI	-	WBAI	MRAI	
		1 ₄				1 ₄			1 ₁	1 ₀		1 ₀		1 ₀	1 ₀		
	0xA001	HWA0	-	-	-	OFUAC	-	-	OVRACHWAI	-	-	-	OFUAI	-	WBAI	MRAI	
		1 ₅				1 ₅			1 ₅	1 ₁		1 ₁		1 ₁	1 ₁		
0xA002	HWA0	-	-	-	OFUAC	-	-	OVRACHWAI	-	-	-	OFUAI	-	WBAI	MRAI		
	1 ₆				1 ₆			1 ₆	1 ₂		1 ₂		1 ₂	1 ₂			
0xA003	HWA0	-	-	-	OFUAC	-	-	OVRACHWAI	-	-	-	OFUAI	-	WBAI	MRAI		
	1 ₇				1 ₇			1 ₇	1 ₃		1 ₃		1 ₃	1 ₃			

PROFINET® Process Data

	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs	0	AI 1 ₀ LSB							
	1	AI 1 ₀ MSB							
	2	AI 1 ₁ LSB							
	3	AI 1 ₁ MSB							
	4	AI 1 ₂ LSB							
	5	AI 1 ₂ MSB							
	6	AI 1 ₃ LSB							
Outputs	0	AO 1 ₀ LSB							
	1	AO 1 ₀ MSB							
	2	AO 1 ₁ LSB							
	3	AO 1 ₁ MSB							
	4	AO 1 ₂ LSB							
	5	AO 1 ₂ MSB							
	6	AO 1 ₃ LSB							
7	AO 1 ₃ MSB								

BL compact™ multiprotocol fieldbus station for Industrial Ethernet
4 Analog Inputs for Current or Voltage and 4 Analog Outputs for Voltage
BLCEN-4M12MT-4AI4AO-VI

Accessories

Type code	Ident-No.		Dimension drawing
LOCK-EURO-C	A0885	Locking guard for straight eurofast™ C-body connectors (RKC, RKCV, RSC, RSCV) in a Class I, Division 2 installations	
LOCK-EURO-C (10/BAG)	A0886	Locking guard for straight eurofast™ C-body connectors (RKC, RKCV, RSC, RSCV) in a Class I, Division 2 installations	