


# Compact multiprotocol I/O module for Ethernet

## 8 digital PNP inputs

## 8 digital outputs 2 A

### FGEN-IOM88-5001

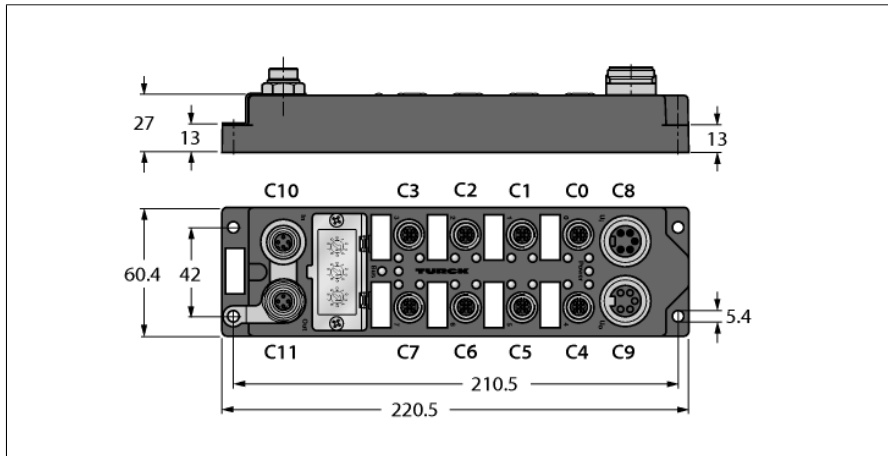

- Multiprotocol I/O module for the Ethernet protocols Modbus TCP, EtherNet/IP and PROFINET
- PROFINET supports Fast Startup (FSU)
- Ethernet/IP supports QuickConnect (QC)
- Integrated Ethernet switch
- FDT / DTM supported
- Input diagnostics per port
- Output diagnostics per channel
- Two inputs or outputs per port
- 7/8", 5-pin, for power supply
- Power supply, galvanically separated
- Fibre-glass reinforced PA6 housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connectors
- Degree of protection IP67

<b>Type</b>	FGEN-IOM88-5001
<b>ID</b>	6825424
<b>Number of channels</b>	16
Operating / load voltage	18...30 VDC
Operating current	< 200 mA
Electrical isolation	operating and load voltage galvanically separated
Voltage supply connection	2 x 7/8"
<b>Inputs</b>	
Number of channels	(8) 3-wire pnp sensors
Input voltage	18...30 VDC from operating voltage UB
Supply current	120 mA per port, short-circuit proof
Switching threshold	EN 61131-3
	low max.: 1.5 mA / high min.: 2 mA
Input delay	2.5 ms
Max. input current	7 mA
Electrical isolation	galvanically separated against the bus and outputs
<b>Outputs</b>	
Number of channels	(8) DC actuators
Output voltage	18...30 VDC from load voltage
Output current per channel	2.0 A, short-circuit proof
Load type	resistive, inductive, lamp load
Simultaneity factor	0.25 for entire module
	1* 2A or 2* 1A per port
	total current max. 9 A per module
Electrical isolation	galvanically separated against bus and inputs
<b>System data</b>	
Transmission rate	10/100 Mbps; Full/Half Duplex; Auto Negotiation; Auto Crossing
Connection technology Ethernet	2 x M12 x 1 female connector, 4-pin, D-coded
Protocol detection	automatic
Web server	from FW 3.1.0.0
Service interface	Ethernet
<b>Modbus TCP</b>	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	8
<b>Ethernet/IP</b>	
Addressing	acc. to EtherNet/IP specification
Quick Connect (QC)	< 150 ms
Device Level Ring (DLR)	supported
Class 3 connections (TCP)	3
Class 1 connections (CIP)	10

**Compact multiprotocol I/O module for Ethernet**  
**8 digital PNP inputs**  
**8 digital outputs 2 A**  
**FGEN-IOM88-5001**

---

**PROFINET**


Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 150 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported

---

**Dimensions (W x L x H)**


Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Halogen-free	yes
Mounting	4 mounting holes Ø 5,4 mm
Ambient temperature	0...+55 °C
Storage temperature	-25...+70 °C
Altitude	Max. 5000 m
Vibration test	Acc. to EN 60068-2-6
Shock test	acc. to EN 60068-2-27
Electromagnetic compatibility	Acc. to EN 61131-2
Protection class	IP67
MTTF	197 years acc. to SN 29500 (Ed. 99) 20 °C
Approvals	CE, cULus
UL Certificate	pol. deg.2, env. temp. max. 40 °C, cl.2 ps req.

**Compact multiprotocol I/O module for Ethernet**  
**8 digital PNP inputs**  
**8 digital outputs 2 A**  
**FGEN-IOM88-5001**




**Accessories**  
 Ethernet cable (example):  
 RSSD RSSD 441 2M  
 Ident-No. U-02482


M12 x 1 Ethernet



C10




C11




**Accessories**  
 Connection cable for dual channels (example):  
 RK 4.4T-2-RS 4.4T  
 Ident-No. U2445  
 Splitter for single channels (example):  
 YB2-FSM 4.5-2FKM 4.5  
 Ident-No. U0875-78

M12 x 1 Input




C0...C3

M12 x 1 Output




C4...C7



**Accessories**  
 Power supply cable (example):  
 RSM RKM 50-2M  
 Ident-No. U2282-0

7/8" Power Supply



C8

C9

**Compact multiprotocol I/O module for Ethernet**  
**8 digital PNP inputs**  
**8 digital outputs 2 A**  
**FGEN-IOM88-5001**

**LED status module**

LED	Color	Status	Description
ETH1 / ETH2	green	on	Ethernet Link (100 Mbps)
		flashing	Ethernet communication (100 Mbps)
	yellow	on	Ethernet Link (10 Mbps)
		flashing	Ethernet communication (10 Mbps)
		off	no Ethernet link
Bus	green	on	Active connection to a master
		flashing	ready
	red	on	IP address conflict or Restore Mode
		flashing	Blink/Wink command active
		off	No power supply
Power	green	on	Operating voltage $U_s$ and load voltage $U_L$ within the defined tolerances
	red	on	Load voltage $U_L$ below the defined tolerances
	off	off	Operating voltage $U_s$ below the defined tolerances

**LED status IOs**

LED	Color	Status	Description
C0.I1 ... C3.I8	green	on	Input active
	red	on	Overload of sensor supply at the corresponding connector
		off	Input inactive
C4.O9 ... C7.O16	green	on	Output active
	red	on	Output active with overload / short circuit
	off	off	Output inactive

# Compact multiprotocol I/O module for Ethernet

## 8 digital PNP inputs

## 8 digital outputs 2 A

### FGEN-IOM88-5001

#### Process data mapping of single protocols

##### Modbus TCP Register Mapping

	Reg	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs (RO)	0x0000	-	-	-	-	-	-	-	-	DI7 C3P2	DI6 C3P4	DI5 C2P2	DI4 C2P4	DI3 C1P2	DI2 C1P4	DI1 C0P2	DI0 C0P4
Status (RO)	0x0001	-	FCE	-	-	CFG	COM	UB	-	UL	-	-	-	-	-	-	Diag Warn
Diag (RO)	0x0002	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	I/O Diag
Outputs (RW)	0x0800	-	-	-	-	-	-	-	-	DO7 C3P2	DO6 C3P4	DO5 C2P2	DO4 C2P4	DO3 C1P2	DO2 C1P4	DO1 C0P2	DO0 C0P4
I/O Diag (RO)	0xA000	SCO7	SCO6	SCO5	SCO4	SCO3	SCO2	SCO1	SCO0	-	-	-	-	SCS3	SCS2	SCS1	SCS0

##### EtherNet/IP™ data mapping with activated Scheduled Diagnostics

	Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input data (Station -> Scanner)																	
GW Status	1	-	FCE	-	-	CFG	COM	UB	-	UL	-	-	-	-	-	-	Diag Warn
Inputs	2	-	-	-	-	-	-	-	-	DI7 C3P2	DI6 C3P4	DI5 C2P2	DI4 C2P4	DI3 C1P2	DI2 C1P4	DI1 C0P2	DI0 C0P4
Diag 1	3	-	-	Sched Diag	-	-	-	-	-	-	-	-	-	-	-	-	I/O Diag
Diag 2	4	SCO7	SCO6	SCO5	SCO4	SCO3	SCO2	SCO1	SCO0	-	-	-	-	SCS3	SCS2	SCS1	SCS0
Output (Scanner -> Station)																	
Control	1	reserved															
Outputs	2	-	-	-	-	-	-	-	-	DO7 C3P2	DO6 C3P4	DO5 C2P2	DO4 C2P4	DO3 C1P2	DO2 C1P4	DO1 C0P2	DO0 C0P4

##### EtherNet/IP™ data mapping with activated Summarized Diagnostics

	Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input data (Station -> Scanner)																	
GW Status	1	-	FCE	-	-	CFG	COM	UB	-	UL	-	-	-	-	-	-	Diag Warn
Inputs	2	-	-	-	-	-	-	-	-	DI7 C3P2	DI6 C3P4	DI5 C2P2	DI4 C2P4	DI3 C1P2	DI2 C1P4	DI1 C0P2	DI0 C0P4
Diag 1	3																I/O Diag
Output (Scanner -> Station)																	
Control	1	reserved															
Outputs	2	-	-	-	-	-	-	-	-	DO7 C3P2	DO6 C3P4	DO5 C2P2	DO4 C2P4	DO3 C1P2	DO2 C1P4	DO1 C0P2	DO0 C0P4

##### PROFINET Process Data

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs	0	DI7 C3P2	DI6 C3P4	DI5 C2P2	DI4 C2P4	DI3 C1P2	DI2 C1P4	DI1 C0P2	DI0 C0P4
Outputs	0	DO15 C7P2	DO14 C7P4	DO13 C6P2	DO12 C6P4	DO11 C5P2	DO10 C5P4	DO9 C4P2	DO8 C4P4

##### Legend:

DI	Digital input	COM	Communication error on internal module bus
DO	Digital output	CFG	I/O configuration error
Cx	female	FCE	I/O-ASSISTANT Force Mode active
Px	Pin	I/ODiag	I/O diagnostics available
DiagWarn	Diagnostic at least on 1 channel	SchedDiag	Manufacturer-specific diagnostics configured and active
UL	Undervoltage UL	SCSx	Short-circuit on sensor supply at female x
UB	Undervoltage UB	SCOx	Short-circuit output x