


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	NYLON OR TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	2.0 A					
RATED VOLTAGE [V]	125 VAC/VDC					
OUTER JACKET MATERIAL/COLOR	TPU/BLACK					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	3x24 AWG					
DRAIN/SHIELD	26 AWG/ALUMPOLYESTER FOIL					
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)					
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67					



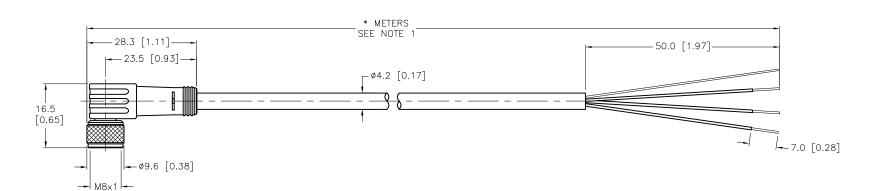

CABLE LENGTH	TOLERANCE*				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

RELATED DOCUMENTS

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.
- 3. "/S653" DESIGNATES FOIL SHIELD AND DRAIN WIRE. DRAIN CONNECTED TO PIN 2.

F	UPDATE CABLE DIAMETER	KMY	10/21/11	36133
REV	DESCRIPTION	BY	DATE	ECO NO.

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	CONFIDE PROPER INC. U DOCUM WRITTEN	DRAWING IS NTIAL AND THE RTY OF TURCK JSE OF THIS IENT WITHOUT PERMISSION IS COHIBITED.		RC
	MATERIAL		DRFT	JBJ	DATE 04/02/04	DESCRIPTION PKW
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD		SCALE 1=1.0	FRW
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT			IDENTIFICATION NO
١	FINISH	CONTACT TURCK MILLIMETER [INCH]			IDENTIFICATION NO.	
	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	^	AILLIME I C		
			D	O NOT SCALE	THIS DRAWING	FILE: 777003045

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

REV

PKW 4M-*/S90/S653

ICATION NO.

SHEET 1 OF 1