


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	TPU OR NYLON					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	2.0 A					
RATED VOLTAGE [V]	125 V					
OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	4x26 AWG					
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67					

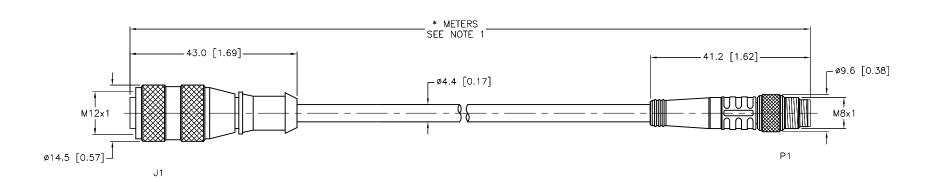

CABLE LENGTH	TOLERANCE *					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS OT	* UNLESS OTHERWISE SPECIFIED					

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

ı					
	D	UPDATE PICOFAST COUPLING NUT PER ECO	KMY	05/15/13	40191
I	REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

1. 2. 3. 4.		DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
М	ATERIAL SEE	SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APVD	DATE 09/26/03 SCALE 1=1.0 EASUREMENT	DESCRIPTION RK 4.4T-*-F	PSG 4M	
FI	NISH SEF	SPECIFICATIONS	REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		ER [INCH]	IDENTIFICATION NO.		REV D
				DO NOT SCALE	THIS DRAWING	FILE: 777002577	SHEET	1 OF 1