
MALE CONNECTOR -	END VIEW
SHIELD 7 6 9 6 5 1 000 4 10 2 3	1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GREY 6 = PINK 7 = BLUE 8 = RED 9 = ORANGE 10 = TAN

SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON or TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	2.0 A			
RATED VOLTAGE [V]	60 VAC/75 VDC			
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	10x24 AWG			
DRAIN/SHIELD	26 AWG/BRAIDED AND FOIL SHIELD			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS IEC IP67			

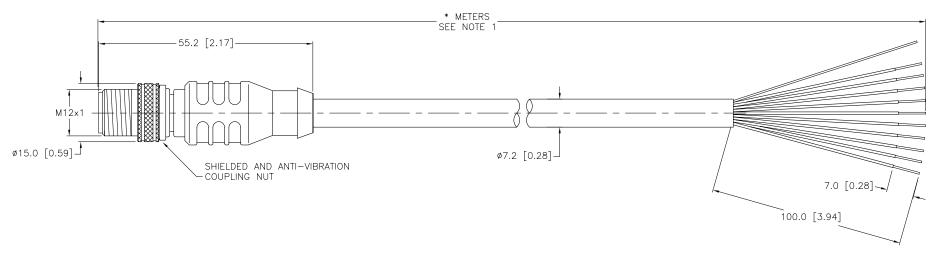

CABLE LENGTH	TOLERANCE		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		

SOURCE DRAWING - FOR REFERENCE ONLY

FILE: 777002673

SHEET 1 OF 1

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 turck.com	N 55441 7769 7300 9708 fax
MATERIAL		DRFT RDS	DATE 12/04/02	DESCRIPTION RSS 10)T *	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	1/33 10) — ·	
DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
FINISH	CONTACT TURCK		ER[INCH]	IDENTIFICATION NO.		
SEE SPECIFICATIONS	FOR MORE INFORMATION					

DO NOT SCALE THIS DRAWING

NOTES:

1."*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

D	UPDATE PROTECTION CLASS	RDS	02/10/11	34226
REV	DESCRIPTION	BY	DATE	ECO NO.