

Part Number PRX+8265-0000 Contact Form A Switch Configuration SPST Rev. B

Universal Temperature Proximity Sensor


Features	Advantages
<ul style="list-style-type: none"> • Engineered for use at extreme temperature • Hermetically sealed contacts • Low-profile design • AC Rating: 120 VAC • Black Valox housing • RoHS compliant • Jacketed Cable 	<ul style="list-style-type: none"> • Not ESD sensitive • Non-obtrusive appearance • Custom sensitivity and configurations available • Housing material flame rating: UL94 • Cable flame rating: NFPA 262/FT6

Electrical Specifications

Power		Watts - maximum	10
Voltage	Switching	VDC - maximum	200
	Breakdown	VDC - minimum	400
Current	Switching	Amp - maximum	0.5
	Carry	Amp - maximum	TBD
Resistance	Initial Contact Resistance	Ohm - maximum	0.50
	Insulation Resistance	Ohm - minimum	1 E11
Capacitance	Contact	pF - typical	0.3
Temperature	Operating	°C - maximum	-60 to 200
	Storage	°C	-60 to 200

Physical/Operational Specifications

Housing Volume	Excluding Connection	CC - nominal	3.43
External Connection	22 AWG	CL2P/CMP	FEP
Must Operate	Distance (d)	Inches	0.500
Must Release	Distance (d)	Inches	1.000
Operate Time	Including Bounce	mSeconds - maximum	0.60
Release Time		mSeconds - maximum	0.30

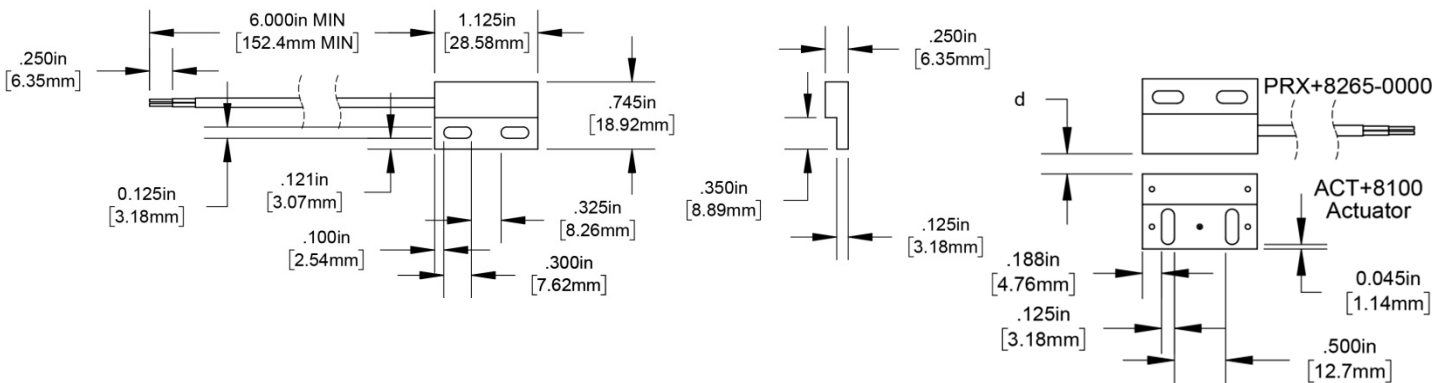

Notes:

- (1) Specifications are not constant across entire magnetic range.
- (2) Customer must exercise care in handling and mounting to prevent damage to internal components and subsequent changes to sensor performance.
- (3) For information about performance, custom configurations (i.e. wire length or color; connectors; operational variation), or packaging contact our Sales Department.
- (4) Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.