

Fuse plug - P-FU 6,3X32 LA 250-EX - 3046525

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Fuse plug, Nominal current: 10 A, Width: 8.2 mm, Fuse type: G / 5 x 20, Fuse type: Sand filled, Color: black

Why buy this product

- Large-surface labeling option
- Test contacts on both sides of the fuse
- Test contacts on both sides of the fuse
- Versions with bipolar defect indicator
- Can be used for overload/short-circuit protection



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	50 STK
GTIN	 4 046356 919272
GTIN	4046356919272
Weight per Piece (excluding packing)	6.000 g
Custom tariff number	85369095
Country of origin	Poland

Technical data

General

Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Number of levels	1
Color	black

Fuse plug - P-FU 6,3X32 LA 250-EX - 3046525

Technical data

General

Insulating material	PA
Flammability rating according to UL 94	V0
Area of application	Machine building
	Plant engineering

Dimensions

Width	8.2 mm
Length	40 mm

General

Fuse	G / 5 x 20
Fuse type	Sand filled
Degree of pollution	3
Maximum power dissipation	1.6 W
LED voltage range	110 V AC/DC ... 250 V AC/DC
LED current range	0.41 mA ... 0.96 mA
Maximum load current	10 A (the current is determined by the fuse used)
Nominal current I_N	10 A (the current is determined by the fuse used)
Open side panel	No


Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Drawings

Fuse plug - P-FU 6,3X32 LA 250-EX - 3046525


Application drawing

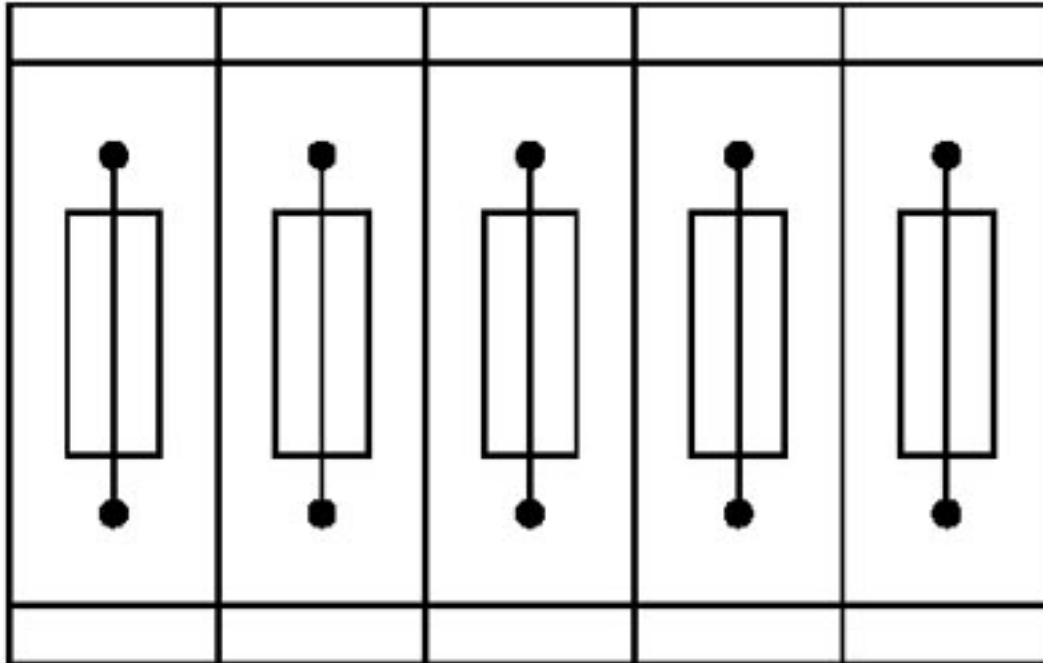

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

Fuse plug - P-FU 6,3X32 LA 250-EX - 3046525

Application drawing

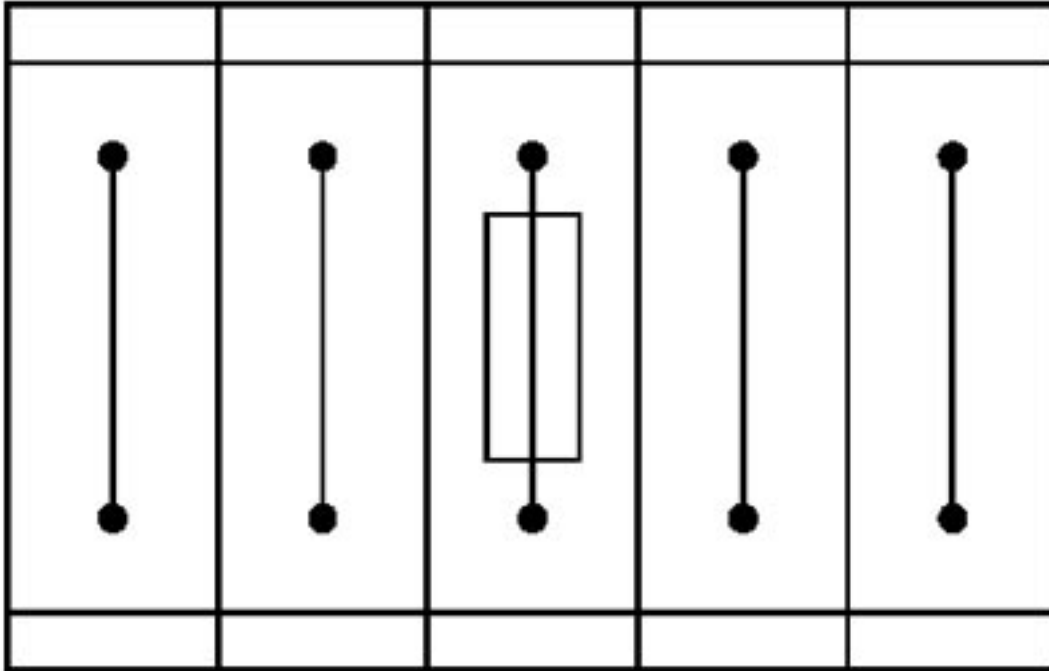

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

Classifications

eCl@ss

eCl@ss 4.0	27141199
eCl@ss 4.1	27141199
eCl@ss 5.0	27141145
eCl@ss 5.1	27141145
eCl@ss 6.0	27141151
eCl@ss 7.0	27141151
eCl@ss 8.0	27141149
eCl@ss 9.0	27141149

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000899
ETIM 5.0	EC002018
ETIM 6.0	EC002018

Fuse plug - P-FU 6,3X32 LA 250-EX - 3046525

Classifications

UNSPSC

UNSPSC 6.01	30211812
UNSPSC 7.0901	39121410
UNSPSC 11	39121411
UNSPSC 12.01	39121411
UNSPSC 13.2	39121409