

# Converter - FB-HSB-DP/PA - 2316370

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PROFIBUS DP to PROFIBUS PA coupler

PROFIBUS DP to PROFIBUS PA coupler

## Product Description


PROFIBUS coupler/link products transparently convert PROFIBUS DP to PROFIBUS PA, while providing detailed network diagnostics and an oscilloscope feature for PROFIBUS PA

## Why buy this product

- One communication interface module can drive up to ten individual PROFIBUS DP or PROFIBUS PA modules
- Auto detect any baud rate up to 12 Mbps transparently
- Powerful, embedded web server for configuration and access to network diagnostics
- Manage and configure PROFIBUS field devices using FDT/DTM



## Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 020471
GTIN	4055626020471

## Technical data

### Dimensions

Width	75 mm
Height	100 mm
Depth	132 mm

### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C
Altitude	2000 m
Degree of protection	IP20

# Converter - FB-HSB-DP/PA - 2316370

## Technical data

### General

Mounting position	On horizontal DIN rail NS 35 in acc. with EN 60715
Net weight	882.4 g
Color	green
UL, USA/Canada	UL 508 Listed
UL, Canada	CSA C22.2 No. 142

### Power supply

Supply voltage range	10.8 V DC ... 26.4 V DC
Max. current consumption	800 mA
Conductor cross section flexible max.	2.50 mm <sup>2</sup>
Conductor cross section flexible min.	0.20 mm <sup>2</sup>
Conductor cross section solid max.	2.50 mm <sup>2</sup>
Conductor cross section solid min.	0.20 mm <sup>2</sup>
Conductor cross section AWG max.	12
Conductor cross section AWG min.	24

### Serial interface

Interface 1	Ethernet
Interface	10/100 Mbps Ethernet
No. of ports	1
Connection method	RJ45
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

### Standards and Regulations

UL, USA/Canada	UL 508 Listed
UL, Canada	CSA C22.2 No. 142


### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

## Converter - FB-HSB-DP/PA - 2316370

Dimensional drawing

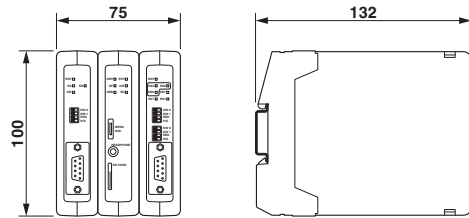

### Articles in set

Repeater - FB-DP-RPTR - 2316373



PROFIBUS DP interface/repeater module

---

Repeater - FB-PA/SC - 2316375



PROFIBUS PA interface module with oscilloscope

---

Converter - FB-HSB - 2316379



Head station for monitoring one PROFIBUS network

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>