

## Universal trip amplifier

### 4131



- Input for RTD, TC, Ohm, potentiometer, mA and V
- 2 adjustable alarm limits
- FM-approved for installation in Div. 2
- 2 relay outputs
- Universal AC or DC supply



#### Advanced features

- Programmable via detachable display front (4501), process calibration, relay simulation, password protection, error diagnostics and selection of help text in several languages.

#### Application


- Process control with 2 pairs of potential-free relay contacts which can be configured to suit any application.
- Trip amplifier with window function defined by a high and a low setpoint. The relay changes state outside the window.
- Relay latch function, where the relay is activated and can only be reset manually.
- Sophisticated sensor error surveillance, where one relay holds the state immediately prior to the sensor error, while allowing the process to continue. The other relay can be set for sensor error alarm so that the defect sensor can be replaced immediately.

#### Technical characteristics


- When 4131 is used with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4131 is designed with electronic hardware switches, it is not necessary to open the device for setting of DIP-switches.
- A green front LED indicates normal operation and malfunction. A yellow LED is ON for each active output relay.
- Continuous check of vital stored data for safety reasons.
- 3-port 2.3 kVAC galvanic isolation.

#### Applications


##### Input signals:

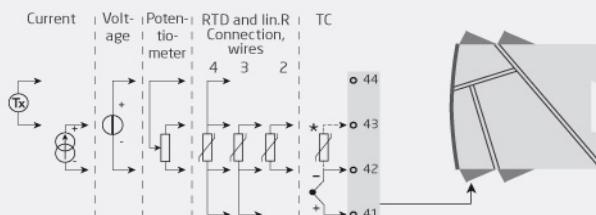

##### Output signals:



##### Supply:

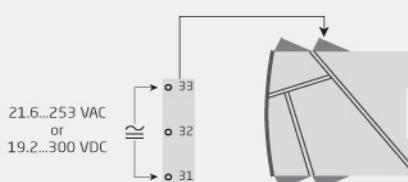

Order:

Type
4131

## Environmental Conditions

Operating temperature.....	-20°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

## Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501 / 4511.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	170 g
Weight incl. 4501 / 4511 (approx.).....	185 g / 270 g
Wire size.....	1 x 2.5 mm <sup>2</sup> stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 2...13.2 Hz..... ±1 mm 13.2...100 Hz..... ±0.7 g

## Common specifications

Supply	
Supply voltage, universal.....	21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
Fuse.....	400 mA SB / 250 VAC
Max. required power.....	≤ 2.0 W

### Isolation voltage

Isolation voltage, test / working.....	2.3 kVAC / 250 VAC
----------------------------------------	--------------------

### Response time

Temperature input (0...90%, 100...10%).....	≤ 1 s
mA / V input (0...90%, 100...10%).....	≤ 400 ms

### Auxiliary supplies

2-w. supply (term. 44...43).....	25...16 VDC / 0...20 mA
Programming.....	Communication enabler 4511 / Programming front 4501
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Accuracy.....	Better than 0.1% of selected range
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

## Input specifications

### RTD input

RTD type.....	Pt10/20/50/100/200/250; Pt300/400/500/1000; Ni50/100/120/1000; Cu10/20/50/100
---------------	----------------------------------------------------------------------------------------

Cable resistance per wire (max.).....	50 Ω
Sensor current.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire).....	< 0.002 Ω / Ω
Sensor error detection.....	Yes
Short circuit detection.....	< 15 Ω

### Linear resistance input

Linear resistance min....max.....	0 Ω...10000 Ω
-----------------------------------	---------------

### Potentiometer input

Potentiometer min....max.....	10 Ω...100 kΩ
-------------------------------	---------------

### TC input

Thermocouple type..... B, E, J, K, L, N, R, S, T, U, W3, W5, LR

Cold junction compensation (CJC) via ext. sensor in connector 5910..... 20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C

CJC via internally mounted sensor..... ±(2.0°C + 0.4°C \* Δt)  
Δt =..... Internal temp.-ambient temp.

Sensor error detection..... Yes  
Sensor error current: When detecting / else..... Nom. 2 μA / 0 μA

### Current input

Measurement range..... 0...20 mA  
Programmable measurement ranges..... 0...20 and 4...20 mA  
Input resistance..... Nom. 20 Ω + PTC 50 Ω

### Voltage input

Measurement range..... 0...12 VDC  
Programmable measurement ranges..... 0/0...1, 0/1...5, 0/2...10 VDC  
Input resistance..... Nom. 10 MΩ

## Output specifications

### Relay output

Relay functions.....	Setpoint, Window, Sensor error, Latch, Power and Off
Hysteresis.....	0...100%
ON and OFF delay.....	0...3600 s
Max. voltage.....	250 VRMS
Max. current.....	2 AAC or 1 ADC
Max. AC power.....	500 VA
Sensor error reaction.....	Break / Make / Hold
*of span.....	= of the currently selected measurement range

## Observed authority requirements

EMC.....	2014/30/EU
LVD.....	2014/35/EU
EAC.....	TR-CU 020/2011

## Approvals

FM.....	3025177
UL.....	UL 508 / C22.2 no. 14
DNV-GL Marine.....	Stand. f. Certific. No. 2.4
EU RO Mutual Recognition Type Approval.....	MRA000000Z