Get It Soldered

Weller Efficiency — the most powerful station in its class now in a new design



Weller®

WE soldering station

Weller introduces a new soldering station designed for vocational and professional uses. The WE station is ready when you are — just switch it on and start soldering.



ADVANTAGES AT A GLANCE


Powerful, user friendly and cost-efficient

- 40% more powerful gets your soldering job done faster
- > Easy to handle high performance iron
- > Intuitive navigation
- > Low total cost of ownership

Maximum reliability and protection

- ESD safe station, iron, and heat-resistant silicon cable for safe handling
- Reinforced safety rest for secure iron storage
- Temperature stability
 (+/- 4°F, 2°C) and
 temperature lock protects tips
 and components, affording
 a consistently high quality
 process with repeatable
 soldering results
- Standby mode and auto setback conserves energy, protects equipment
- Password-protected to preserve settings

2 | WE SOLDERING STATION

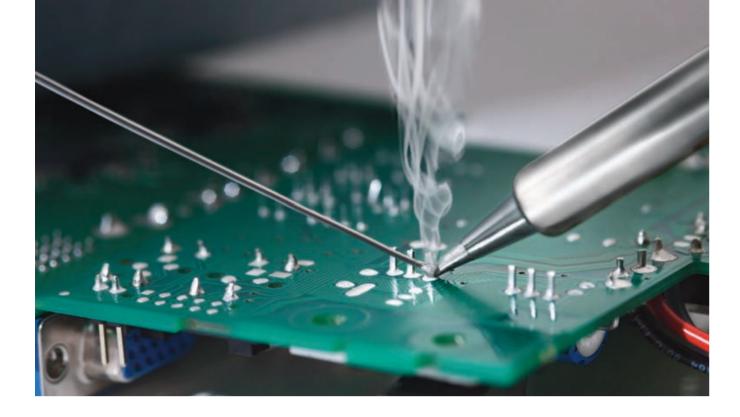

Get it soldered with the WE soldering station...



Gets your soldering job done faster

Digital 70 W soldering station, 40% more powerful than the WES/WESD station. This allows the iron to heat up faster and to provide a faster recovery time – gets the job done quicker with more efficiency and precision.



Easy to handle high performance iron

New high performance 70 W soldering iron with an ergonomic handle and easy toolless tip change solution:

- > The iron was designed in a light weight pencil style with a co-molded grip.
- > The new and improved safety rest has additional support so that the iron is stored securely in place in between use.



Intuitive navigation

- > The station is designed in a state-of-the-art housing with front panel power switch for easy access.
- The digital WE soldering station features an easy-toread LCD screen with 3 push buttons providing easy temperature control, a front switch for easy on/off and intuitive navigation through all new SW features.



Easy tip change and low total cost of ownership

- > Change hot tips out by hand by twisting the plastic knurled nut on the soldering pencil without an additional tool.
- > The soldering set and the genuine Weller ET series tips provide the best performance and an extraordinary lifetime.
- Choose from a wide selection of existing high quality, affordable, genuine Weller ET tips. Here's where the station starts to pay for itself.



...with improved features



Safe handling

- > ESD safe
- Both station and iron have passed inspection and have received a Certificate of Compliance for electrical safety (CE, UL)
- The flexible silicon cable withstands heat because it meets the highest industry standards for mechanical strength (overload/stress). Because it's certified ESD safe, the WE station can be used for professional use.



Temperature stability

- > +/- 4°F, 2°C (even better than MIL Spec)
- Temperature lock stabilizes heat levels to protect tips and components and aid in producing uniformly high quality solder joints - reliable and repeatable soldering results



Standby mode

> Station automatically powers down to a given temperature when not in use

AUTOMATIC SET-BACK

Automatic set-back

> Sets temperature back automatically when not in use to save energy and increase tip lifetime



Password-protected

 All settings can be secured with a password, so that predefined settings can be maintained in order to ensure process quality

4 | WE SOLDERING STATION weller-tools.com | 5

ET soldering tips

The sensor hole in the base of the tip is fitted with a stainless steel liner to prevent the tip from seizing to the sensor.



0.09 0.12 0.18 0.03 lo. IN 0.03 0.04 0.07 0.07 0.07 0.07	062 193 2 125 3 187 4 187 4 187 198 198 198 198 198 198 198 198 198 198	2.40 3.20 4.80 0.80 0.80 1.20 2.00 3.20 MM 1.60	IN. 0.012 0.026 0.027 0.037	0.30 0.66 0.69 0.94 3 MM	1.000 1.000 1.000 1.000 1.000	15.90 15.90 15.90 15.90 25.40 25.40 25.40 25.40
0.09 0.12 0.18 0.03 lo. IN 0.03 0.04 0.07 0.07 0.07 0.07	A N. 0062	2.40 3.20 4.80 0.80 MM 0.80 1.20 2.00 3.20 MM 1.60	0.020 0.027 0.035 0.019 IN. 0.012 0.026 0.027 0.037	0.51 0.69 0.89 0.48 3 MM 0.30 0.66 0.69 0.94 1.12	0.625 0.625 0.625 0.625 1N. 1.000 1.000 1.000 1.000	15.90 15.90 15.90 15.90 25.40 25.40 25.40 25.40
0.12 0.18 0.03 io. IN 0.00 0.00 0.01	125 3 187 4 187 4 187 187 187 187 187 187 187 187 187 187	3.20 4.80 0.80 MM 0.80 1.20 2.00 3.20 MM 1.60	0.027 0.035 0.019 IN. 0.012 0.026 0.027 0.037	0.69 0.89 0.48 3 MM 0.30 0.66 0.69 0.94 1.12	0.625 0.625 0.625 1N. 1.000 1.000 1.000 1.000	15.90 15.90 15.90 25.40 25.40 25.40 25.40
0.18 0.03 io. IN 0.03 0.00 0.00 0.01 0.12	A A N. A A N	MM 0.80 1.20 2.00 3.20 MM	0.035 0.019 IN. 0.012 0.026 0.027 0.037	0.89 0.48 MM 0.30 0.66 0.69 0.94 1.12	0.625 0.625 IN. 1.000 1.000 1.000 1.000	15.90 15.90 MM 25.40 25.40 25.40 25.40
0.03 lo. IN 0.03 0.00 0.00 0.11	A N. 062	0.80 0.80 1.20 2.00 3.20 MM 1.60	0.019 IN. 0.012 0.026 0.027 0.037	0.48 MM 0.30 0.66 0.69 0.94 1.12	0.625 IN. 1.000 1.000 1.000 1.000 1.000	15.90 MM 25.40 25.40 25.40 25.40
0.03 0.04 0.05 0.07 0.12	A N. 031 046 078 125 A N. 062	MM 0.80 1.20 2.00 3.20 MM 1.60	IN. 0.012 0.026 0.027 0.037	0.30 0.66 0.69 0.94 3 MM	1.000 1.000 1.000 1.000 1.000 1.000	25.40 25.40 25.40 25.40 25.40
0.03 0.04 0.05 0.12	031 046 078 125 A	0.80 1.20 2.00 3.20 MM 1.60	IN. 0.012 0.026 0.027 0.037	0.30 0.66 0.69 0.94 3 MM	1.000 1.000 1.000 1.000 1.000	25.40 25.40 25.40 25.40 25.40
0.03 0.04 0.05 0.12	031 046 078 125 A	0.80 1.20 2.00 3.20 MM 1.60	IN. 0.012 0.026 0.027 0.037	0.30 0.66 0.69 0.94 3 MM	1.000 1.000 1.000 1.000 1.000	25.40 25.40 25.40 25.40 25.40
0.04 0.07 0.12	.046 .078 .125 A IN.	1.20 2.00 3.20 MM 1.60	0.026 0.027 0.037 IN.	0.66 0.69 0.94 3 MM 1.12	1.000 1.000 1.000 1.000	25.40 25.40 25.40
0.04 0.07 0.12	.046 .078 .125 A IN.	1.20 2.00 3.20 MM 1.60	0.026 0.027 0.037 IN.	0.66 0.69 0.94 3 MM 1.12	1.000 1.000 1.000 1.000	25.40 25.40 25.40
0.01 0.12 lo. IN	.078 .125 .A.IN.	2.00 3.20 MM 1.60	0.027 0.037 IN. 0.044	0.69 0.94 3 MM 1.12	1.000 1.000	25.40 25.40 MM
lo. IN	A IN. 062	MM 1.60	IN. 0.044	3 MM 1.12	IN. 0.625	С
	062	1.60	IN. 0.044	MM 1.12	IN. 0.625	MM
	062	1.60	IN. 0.044	MM 1.12	IN. 0.625	MM
	.062	1.60	0.044 E	1.12	0.625	
0.06			E	3		15.90
					,	
lo. IN	IN.	IAIIAI	114.	MM	IN.	ММ
		0.00	0.040			
	.031 .024	0.80	0.012 0.036	0.30 0.91	0.625 0.625	
				3	,	
lo. IN	IN.	ММ	IN.	MM	IN.	MM
		0.80	0.044	1.12	1.000	
	.015				1.000	
	Α		E	3	(>
	IN.	ММ	IN.	ММ	IN.	
	.062		0.040	1.02	0.625	
0.0	1193	2.40	0.032	0.81	0.625	
0.00			0.032		0.625	
0.00 0.00 0.12	125		0.032	0.81	0.625	
0.06 0.09 0.12 0.18	.125 .187				0.700	
0.00 0.09 0.12 0.01	.125 .187 .015	0.00			0.700	17.80
0.00 0.09 0.12 0.01	.125 .187 .015	0.60				
0.00 0.09 0.12 0.01	.125 .187 .015 .024			ર		•
0.06 0.09 0.12 0.13 0.09 0.09	.125 .187 .015 .024		IN.	B MM	IN.	MM
0.06 0.09 0.12 0.01 0.00 0.02	.125 .187 .015 .024	мм		MM		MM
0.06 0.09 0.12 0.01 0.00 0.02	125 187 015 024 A	мм	IN.	MM	IN.	MM
3	C 0.	0.024				_

Still your **favorite**

All this and more, the WE soldering station set will remain your reliable standby for a soldering station and iron, and with proper care will give you many years of satisfying service.







Technical Data

Dimensions L x W x H	150 x 125 x 100 mm 5.91 x 4.92 x 3.94 inches
Power supply	230 V / 50 Hz; 120 V / 60 Hz
Power	70 W
Temperature range	200°F-850°F; 100°C-450°C
Temperature accuracy	+/- 17°F , 9°C
Temperature stability	+/- 4°F , 2°C
ESD safe	yes
Supplied tip	ETA

Weller

Applications*	
 Easy professional soldering jobs PCBs Electronic kits Education Radio-controlled Indoor lighting Low-voltage wiring Cable assembling 	 Hobby models Small appliance Small engine Repair Crafts Audio systems Electrical

Recommended
 Acceptable

*NOT RECOMMENDED FOR: micro-components, marine, automotive, heat sink, ground plane, metal art, plumbing, jewelry

WE Soldering Station					
Order no.	Description				
WE1010NA	WE1 STATION 120V WEP70 SOLDERING IRON PH70 SAFETY REST WITH SPONGE ETA TIP 0.062" / 1.6 MM SCREWDRIVER				

Accessories				
Order no.	Description			
T0058770714	WEP70 TIP RETAINER			
T0058770715	WEP70 SOLDERING IRON			
T0058770706	PH70 SAFETY REST WITH SPONGE			
TC205	SPONGE REPLACEMENT			
	ET SERIES TIPS			







Also offering an extensive selection in professional filtration and precision tools

Weller®

GERMANY

Weller Tools GmbH Carl-Benz-Straße 2 74354 Besigheim

Tel: +49 (0) 7143 580-0 Fax: +49 (0) 7143 580-108

CHINA

Apex Tool Group 2nd Floor, Area C, 177 Bibo Road, Pudong, Shanghai, 201203

Tel: +86 (21) 60880288 Fax: +86 (21) 60880298

USA

Apex Tool Group, 670 Industrial Drive Lexington SC, 29072

Tel: +1 (800) 688-8949 Fax: +1 (800) 234-0472

www.weller-tools.com