

Housing - HC-STA-B16-SLWD-2SSM25-ELC-AL - 1412855

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Box mounting bases B16, with double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 2, lateral, height: 68 mm, cable gland: none, support sleeve: no, 2x M25, Standard

Your advantages

- good shielding in the event of electromagnetic interference



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 055626 060767 |
| GTIN | 4055626060767 |

Technical data

Dimensions

| | |
|--------|----------|
| Height | 68 mm |
| Width | 57 mm |
| Length | 117.5 mm |

Ambient conditions

| | |
|--|-------------------|
| Degree of protection of housing (IP) | IP66 |
| | IP67 |
| Degree of protection of housing (NEMA) | 4 (UL 50e) |
| | 4X (UL 50e) |
| | 12 (UL 50e) |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|------|---|
| Note | For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K |
| Size | B16 |

Housing - HC-STA-B16-SLWD-2SSM25-ELC-AL - 1412855

Technical data

General


| | |
|------------------------------|---|
| Housing type | Box mounting bases |
| Color | gray aluminum |
| Locking type | with double locking latch |
| No. of cable outlets | 2 |
| Cable outlet | lateral |
| Screw connection | none |
| Type of the screw connection | 2x M25 |
| Housing material | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated |
| Seal material | NBR, conductive |
| Material lock | PA |
| Assembly instructions | One opening is sealed with a plastic filler plug and can be opened using a screwdriver. |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Dimensional drawing

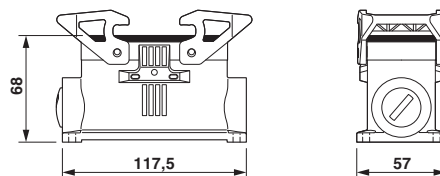

Dimensional drawing

Approvals

Approvals

Approvals






GL / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

Housing - HC-STA-B16-SLWD-2SSM25-ELC-AL - 1412855

Approvals

| | | | |
|------------------|---|---|--------------------------|
| GL |  | http://exchange.dnv.com/tari/ | 6196614 HH |
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E255026 |
| cUL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E255026 |
| EAC |  | | RU C- DE.AI30.B.01102 |
| cULus Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | |

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>