# EP1WSS100RJ <

# Neohm | Neohm EP TE Internal #: 4-2176610-9 100 Ω, Wire Wound, Power Resistor, 5 %, 9.5 x 3.5 mm, 2 Termination, Ammo Packed, 1 W, ±300 ppm/°C, Tinned Copper Leads Termination, Neohm EP

## View on TE.com >

## Passive Components > Resistors > Through-Hole Resistors



Resistor Type: Power Resistor

Passive Component Dimensions: 9.5 x 3.5 mm

Number of Terminations: 2

Packaging Method: Ammo Packed

Passive Component Tolerance: 5%

## Features



## Product Type Features

Product Type	Fixed Resistor
Resistor Type	Power Resistor
Element Type	Wire Wound
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Voltage Rating	500 V
Passive Component Tolerance	5 %
Resistance Class	Up to 1kΩ
Resistance Value	100 Ω
Power Rating	1 W
Body Features	
Passive Component Lead Type	Axial-Leaded

## EP1WSS100RJ

100 Ω, Wire Wound, Power Resistor, 5 %, 9.5 x 3.5 mm, 2 Termination, Ammo Packed, 1 W, ±300 ppm/°C, Tinned Copper Leads Termination, Neohm EP



## **Termination Features**

Number of Terminations	2
Passive Component Termination Material Type	Tinned Copper Leads
Dimensions	
Passive Component Dimensions	9.5 x 3.5 mm
Usage Conditions	
Operating Temperature Range	-55 – 155 °C
Temperature Coefficient	±300 ppm/°C
Packaging Features	
Packaging Method	Ammo Packed
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Wave solder capable to 265°C

### Halogen Content

Solder Process Capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

## EP1WSS100RJ


100 Ω, Wire Wound, Power Resistor, 5 %, 9.5 x 3.5 mm, 2 Termination, Ammo Packed, 1 W, ±300 ppm/°C, Tinned Copper Leads Termination, Neohm EP



# **Compatible Parts**



## Also in the Series | Neohm EP

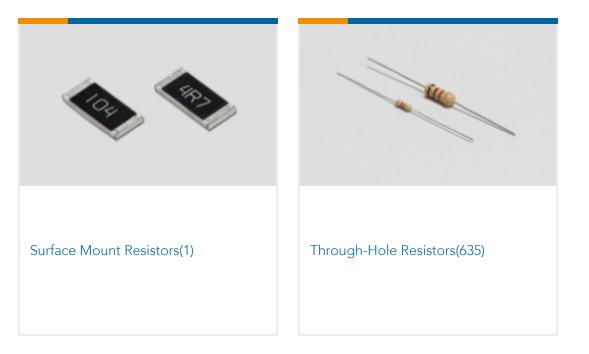

## Documents

## **Product Drawings** EP 1W (SS) 100R 5%

English

**CAD** Files

**Customer View Model** 

ENG\_CVM\_CVM\_4-2176610-9\_BA.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_4-2176610-9\_BA.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_4-2176610-9\_BA.2d\_dxf.zip

English

## 3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages Wirewound Anti Surge Resistors - Type EP Series English

## EP1WSS100RJ

100 Ω, Wire Wound, Power Resistor, 5 %, 9.5 x 3.5 mm, 2 Termination, Ammo Packed, 1 W, ±300 ppm/°C, Tinned Copper Leads Termination, Neohm EP

