Ixxat®
BY HMS NETWORKS

CAN-IB410/PMC

Active CAN Interface for PMC

2-4 x CAN (High-/Low-Speed), LIN

With the CAN-IB410/PMC HMS offers an interface board based on a modern and highly modular concept for PMC systems (PCI Mezzanine Card). The board covers a wide range of field buses, such as CAN (ISO 11898-2), fault tolerant CAN (ISO 11898-3) and LIN.

FEATURES AND BENEFITS

- Active board with 32 bit microcontroller
- Easy expandable via MultiCAN expansion and fieldbus expansion
- Up to four CAN channels (High-/Low-Speed optional switchable)
- LIN optional
- Galvanic isolation of the CAN interface
- Uniform driver packages support all Ixxat CAN and CAN-FD interfaces and allow easy change of the PC interface type
- Powerful programming interface for Windows "VCI" as well as "ECI" for Linux, QNX, RTX, INtime and VxWorks

VERSIONS

The CAN-IB410/PMC is available with up to four CAN channels with galvanic isolated interfaces. For use in the automotive field the high-speed CAN channels can optionally be switched to low-speed CAN via software. In addition, the card can be equipped with up to two LIN interfaces. Furthermore, the modular architecture of the interface card enables the easy extension with customer specific interfaces via piggyback modules. Due to the high number of interfaces, the board is also suitable for demanding applications - such as

- test benches,
- handling systems or
- manufacturing plants.

If necessary, the number of interface channels can be extended by using multiple cards within one PC.

TECHNICAL SPECIFICATIONS

PC bus interface	PMC
PC address range	Plug & Play
Interrupts	Plug & Play
Microcontroller	32 bit microcontroller

CAN interface	2 or 4 CAN interfaces; CAN 2.0 A/B; Sub-D9 plug according to CiA 303-1; Galvanic isolation (1 kV, 1 sec.) **Optional**: CAN Low-Speed (switchable via software between CAN High-Speed and Low-Speed)
LIN interface	**Optional:** up to 2 LIN (ISO 9141) interfaces; Sub-D9 plug
Power supply	3.3 V DC, 650 mA typ.
Temperature range	-20 ºC … +70 ºC
Certification	CE
Size	Approx. 74 x 149 mm

CONTENTS OF DELIVERY

- PC/CAN interface card, manual
- CAN driver VCI for Windows 11, Windows 10 (32/64) / Windows 8 (32/64) / Windows 7 (32/64) / Windows XP SP2 (older versions on request)
- Simple CAN monitor "canAnalyser Mini"

File	Version	Size	Read online

Order numbers

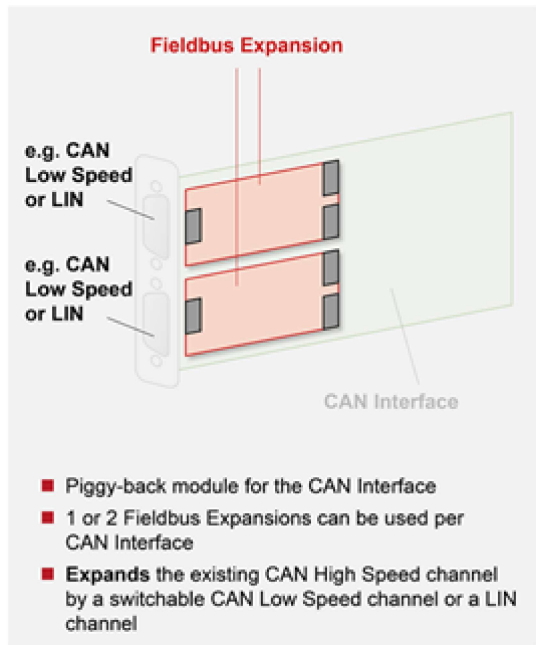| CAN ports	Galv. iso.	Order numbers	Optional expansions	Additional information
2	X	**1.01.0314.22001**	**2 x Fieldbus Expansion** For variants and order numbers see table below	
4	X	**1.01.0314.22001** **+ 1.01.0242.22200** Multi CAN Expansion		Two CAN ports on each SUB-D9 plug

Fieldbus Expansions

Type	Galv. iso.	Order numbers
CAN Low-Speed (ISO 11898-3) / LIN (ISO 9141) for PMC and XMC boards	X	**1.01.0241.20200**

Expansions

Fieldbus Expansion

Fieldbus Expansion

e.g. CAN Low Speed or LIN

e.g. CAN Low Speed or LIN

CAN Interface

- Piggy-back module for the CAN Interface
- 1 or 2 Fieldbus Expansions can be used per CAN Interface
- **Expands** the existing CAN High Speed channel by a switchable CAN Low Speed channel or a LIN channel

Multi CAN Expansion

Multi CAN Expansion

CAN 1
CAN 3

CAN 2
CAN 4

CAN Interface

- Piggy-back module for the CAN Interface
- Provides two **additional** CAN channels
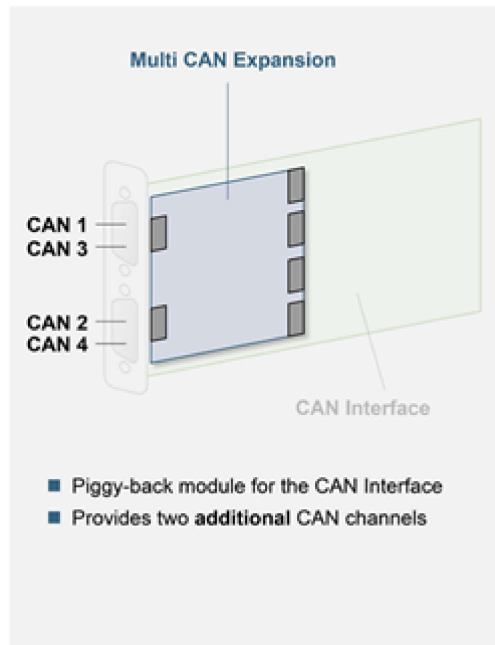
Accessories

Product image	Type	Order number
	Sub-D9 Connector with CAN Termination	1.04.0075.03000
	CAN cable	1.04.0076.00180
	Y CAN cable	1.04.0076.00001
More accessories and detailed information...		