


MENNEKES
Electrical Products
277 Fairfield Road
Fairfield, NJ 07004
800-882-7584
www.MENNEKES.com

STAINLESS DISCONNECT SWITCH

Part No. ME 100SDS2A-M2-MF

Description: 100 Amp 3Ø 600Vac Motor Disconnect with Early Break Aux Contacts - 1 N/O; 1 N/C


Construction: NEMA 4X; 12; IP69K

Compliance:  UL Standard 508 and CSA C22.2 No.14-M95

Short Circuit Current Rating (SCCR): Suitable for use as a Motor Disconnect per NEC 430-109 (a)(6) @ 65,000 RMS Symmetrical Amps at full rated current when protected with 100A Class J Fuses.

HP RATINGS:

1 Ø 240V	3 Ø 240	3 Ø 480	3 Ø 600
15	25	50	50

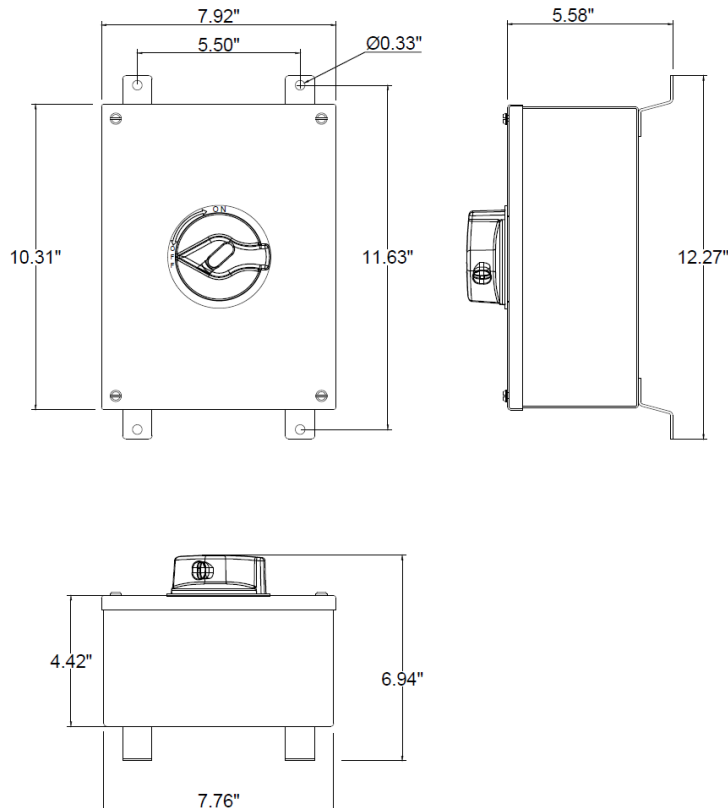

Drawing Not to Scale