

MENNEKES Electrical Products 277 Fairfield Road Fairfield, NJ 07004 800-882-7584 www.MENNEKES.com

STAINLESS DISCONNECT SWITCH

Part No. ME 30SDS-M2-MF

Description: 30 Amp 3Ø 600Vac Motor Disconnect with

Early Break Aux Contacts - 1 N/O; 1 N/C

Construction: NEMA 4X; 12; IP69K

CUL us UL Standard 508 and CSA C22.2 No.14-M95 Compliance:

Short Circuit Current Rating

(SCCR):


Suitable for use as a Motor Disconnect per NEC 430-109 (a)(6)


@ 65,000 RMS Symmetrical Amps at full rated current when protected

with 40A Class J Fuses.

HP RATINGS:

1 Ø 240V	3 Ø 240	3 Ø 480	3 Ø 600
5	10	20	25

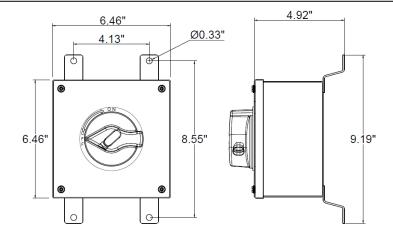



Drawing Not to Scale