
Miniature Basic Switch that Offers High Reliability and Security

- Wide variation of best-selling microswitches with switching currents of 10 to 21 A.
- Can be used for interrupting current when doors are opened or closed.
- Available in two types of cases: thermoplastic resin and thermosetting resin.
- Indium contact models available for DC load



Model Number Legend

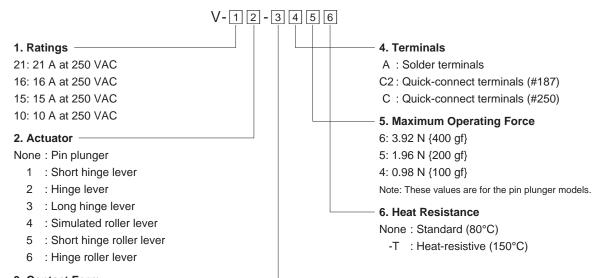

3. Contact Form

- 1: SPDT
- 2: SPST-NC
- 3: SPST-NO

1



List of Models

Thermoplastic Case

			Ratings	21A	16A
Actuator	Terminals	Contact form	Maximum operating force (OF)	ZIA	IOA
		SPDT			V-16-1A6
		SPST-NC	3.92N		V-16-2A6
		SPST-NO			V-16-3A6
		SPDT			V-16-1A5
	Solder terminals (A)	SPST-NC	1.96N		V-16-2A5
	(* ')	SPST-NO			V-16-3A5
		SPDT			
		SPST-NC	0.98N		
		SPST-NO			
		SPDT			V-16-1C26
		SPST-NC	3.92N		V-16-2C26
		SPST-NO			V-16-3C26
Pin plunger	Quick-connect	SPDT	1.96N		V-16-1C25
n in presign	terminals (#187)	SPST-NC			V-16-2C25
	(C2)	SPST-NO			V-16-3C25
		SPDT			
		SPST-NC	0.98N		
		SPST-NO			
		SPDT		V-21-1C6	V-16-1C6
		SPST-NC	3.92N	V-21-2C6	V-16-2C6
		SPST-NO		V-21-3C6	V-16-3C6
	Quick-connect	SPDT			V-16-1C5
	terminals (#250)	SPST-NC	1.96N		V-16-2C5
	(C)	SPST-NO			V-16-3C5
		SPDT			
		SPST-NC	0.98N		
		SPST-NO			



			Ratings	21A	16A
Actuator	Terminals	Contact form	Maximum operating force (OF)	21/1	10/1
		SPDT			V-161-1A6
		SPST-NC	3.92N		V-161-2A6
		SPST-NO			V-161-3A6
		SPDT			V-161-1A5
	Solder terminals (A)	SPST-NC	1.96N		V-161-2A5
	(7.1)	SPST-NO			V-161-3A5
		SPDT			
		SPST-NC	0.98N		
		SPST-NO			
		SPDT			V-161-1C26
		SPST-NC	3.92N		V-161-2C26
		SPST-NO			V-161-3C26
Short hinge lever	0.1	SPDT			V-161-1C25
	Quick-connect terminals (#187)	SPST-NC	1.96N		V-161-2C25
<u>~~</u>	(C2)	SPST-NO			V-161-3C25
		SPDT			
		SPST-NC	0.98N		
		SPST-NO	0.3011		
		SPDT		 V-211-1C6	V-161-1C6
		SPST-NC	3.92N	V-211-1C6	V-161-1C6 V-161-2C6
		SPST-NO	3.92IN	V-211-2C6 V-211-3C6	V-161-2C6 V-161-3C6
					V-161-1C5
	Quick-connect	SPDT	4 0011		
	terminals (#250) (C)	SPST-NC	1.96N		V-161-2C5
	(-)	SPST-NO			V-161-3C5
		SPDT	0.98N		
		SPST-NC			
		SPST-NO			
		SPDT			V-162-1A6
		SPST-NC	2.45N		V-162-2A6
		SPST-NO			V-162-3A6
	Solder terminals	SPDT			V-162-1A5
	(A)	SPST-NC	1.23N		V-162-2A5
		SPST-NO			V-162-3A5
		SPDT			
		SPST-NC	0.59N		
		SPST-NO			
		SPDT			V-162-1C26
		SPST-NC	2.45N		V-162-2C26
		SPST-NO			V-162-3C26
Hinge lever	Quick-connect	SPDT			V-162-1C25
	terminals (#187)	SPST-NC	1.23N		V-162-2C25
4	(C2)	SPST-NO			V-162-3C25
		SPDT			
		SPST-NC	0.59N		
		SPST-NO			
		SPDT		V-212-1C6	V-162-1C6
		SPST-NC	2.45N	V-212-2C6	V-162-2C6
		SPST-NO		V-212-3C6	V-162-3C6
	0	SPDT			V-162-1C5
	Quick-connect terminals (#250)	SPST-NC	1.23N		V-162-2C5
	(C)	SPST-NO	1.2511		V-162-3C5
		SPDT			
			0.50N		
		SPST-NC	0.59N		
		SPST-NO			



			Ratings	24.6	464
Actuator	Terminals	Contact form	Maximum operating force (OF)	21A	16A
		SPDT			V-163-1A6
		SPST-NC	1.27N		V-163-2A6
		SPST-NO			V-163-3A6
	0-144	SPDT			V-163-1A5
	Solder terminals (A)	SPST-NC	0.69N		V-163-2A5
	. ,	SPST-NO			V-163-3A5
		SPDT			
		SPST-NC	0.34N		
		SPST-NO			
		SPDT			V-163-1C26
		SPST-NC	1.27N		V-163-2C26
		SPST-NO			V-163-3C26
Long hinge lever	Quick-connect	SPDT			V-163-1C25
	terminals (#187) (C2)	SPST-NC	0.69N		V-163-2C25
<u> </u>	(02)	SPST-NO			V-163-3C25
		SPDT			
		SPST-NC	0.34N		
		SPST-NO			
		SPDT		V-213-1C6	V-163-1C6
		SPST-NC	1.27N	V-213-2C6	V-163-2C6
		SPST-NO		V-213-3C6	V-163-3C6
	Quick-connect	SPDT			V-163-1C5
	terminals (#250) (C)	SPST-NC	0.69N		V-163-2C5
	(0)	SPST-NO			V-163-3C5
		SPDT	0.34N		
		SPST-NC			
		SPST-NO			
		SPDT			V-164-1A6
		SPST-NC	2.45N		V-164-2A6
		SPST-NO			V-164-3A6
	Solder terminals	SPDT			V-164-1A5
	(A)	SPST-NC	1.23N		V-164-2A5
		SPST-NO			V-164-3A5
		SPDT			
		SPST-NC	0.59N		
		SPST-NO			
		SPDT	0.451		V-164-1C26
		SPST-NC	2.45N		V-164-2C26
Simulated roller		SPST-NO			V-164-3C26
lever	Quick-connect	SPDT	4 001		V-164-1C25
~	terminals (#187) (C2)	SPST-NC	1.23N		V-164-2C25
A.		SPST-NO			V-164-3C25
		SPDT	0.50N		
		SPST-NC SPST-NO	0.59N		
		SPDT	2.45N	V-214-1C6	V-164-1C6
		SPST-NC SPST-NO	2.45N	V-214-2C6 V-214-3C6	V-164-2C6 V-164-3C6
	Quick-connect terminals (#250)	SPDT SPST-NC	1 22N		V-164-1C5 V-164-2C5
	(C)	SPST-NC SPST-NO	1.23N		V-164-2C5 V-164-3C5
		SPDT SPST NC	0.50N		
		SPST-NC	0.59N		
		SPST-NO			



Actuator	Terminals	Contact form	Ratings Maximum operating force (OF)	21A	16A
Notuator	Tommais	SPDT	waximam operating totce (Of)		V-165-1A6
		SPST-NC	4.71N		V-165-2A6
	-	SPST-NO	7.711		V-165-3A6
		SPDT			V-165-1A5
	Solder terminals	SPST-NC	2.35N		V-165-2A5
	(A)	SPST-NO	2.3314		V-165-2A5 V-165-3A5
		SPDT			
			4.400		
		SPST-NC	1.18N		
		SPST-NO			 V 465 4636
		SPDT	4.7451		V-165-1C26
	•	SPST-NC	4.71N		V-165-2C26
Short hinge roller	•	SPST-NO			V-165-3C26
lever	Quick-connect	SPDT			V-165-1C25
@	terminals (#187) (C2)	SPST-NC	2.35N		V-165-2C25
<u>~</u>	(/	SPST-NO			V-165-3C25
		SPDT			
		SPST-NC	1.18N		
		SPST-NO			
		SPDT		V-215-1C6	V-165-1C6
		SPST-NC	4.71N	V-215-2C6	V-165-2C6
		SPST-NO		V-215-3C6	V-165-3C6
	Quick-connect	SPDT			V-165-1C5
	terminals (#250) (C)	SPST-NC	2.35N		V-165-2C5
		SPST-NO			V-165-3C5
		SPDT			
		SPST-NC	1.18N		
		SPST-NO			
		SPDT			V-166-1A6
		SPST-NC	2.45N		V-166-2A6
		SPST-NO			V-166-3A6
	Colder torminals	SPDT			V-166-1A5
	Solder terminals (A)	SPST-NC	1.23N		V-166-2A5
	()	SPST-NO			V-166-3A5
		SPDT			
		SPST-NC	0.59N		
		SPST-NO			
		SPDT			V-166-1C26
		SPST-NC	2.45N		V-166-2C26
		SPST-NO			V-166-3C26
Hinge roller lever	Quick-connect	SPDT			V-166-1C25
	terminals (#187)	SPST-NC	1.23N		V-166-2C25
~	(C2)	SPST-NO			V-166-3C25
		SPDT			
		SPST-NC	0.59N		
		SPST-NO			
		SPDT		V-216-1C6	V-166-1C6
		SPST-NC	2.45N	V-216-2C6	V-166-2C6
		SPST-NO		V-216-3C6	V-166-3C6
	Quick-connect	SPDT			V-166-1C5
	terminals (#250)	SPST-NC	1.23N		V-166-2C5
	(C)	SPST-NO			V-166-3C5
		SPDT			
		SPST-NC	0.59N		
		SPST-NO			
					1



Thermosetting case

			Ratings	15A	10A		esistive
Actuator	Terminals	Contact form	Maximum operating force (OF)			15A	10A
		SPDT		V-15-1A6		V-15-1A6-T	
		SPST-NC	3.92N	V-15-2A6			
		SPST-NO		V-15-3A6			
		SPDT		V-15-1A5	V-10-1A5	V-15-1A5-T	V-10-1A5-T
	Solder terminals (A)	SPST-NC	1.96N	V-15-2A5	V-10-2A5		
		SPST-NO		V-15-3A5	V-10-3A5		
		SPDT			V-10-1A4		V-10-1A4-T
		SPST-NC	0.98N		V-10-2A4		V-10-2A4-T
		SPST-NO			V-10-3A4		V-10-3A4-T
		SPDT		V-15-1C26		V-15-1C26-T	
		SPST-NC	3.92N	V-15-2C26			
		SPST-NO		V-15-3C26			
Dia alemana	0	SPDT		V-15-1C25	V-10-1C25	V-15-1C25-T	V-10-1C25-T
Pin plunger	Quick-connect terminals (#187)	SPST-NC	1.96N	V-15-2C25	V-10-2C25		
	terminals (#187) (C2)	SPST-NO		V-15-3C25	V-10-3C25		
		SPDT			V-10-1C24		V-10-1C24-T
		SPST-NC	0.98N		V-10-2C24		
		SPST-NO	- 0.0014		V-10-2C24 V-10-3C24		
		SPDT		V-15-1C6		V-15-1C6-T	
		SPST-NC	3.92N	V-15-1C6 V-15-2C6		V-13-1C0-1	
			3.92IN				
		SPST-NO SPDT		V-15-3C6	 V 40 405	 V 45 405 T	 V 40 405 T
	Quick-connect		1.96N	V-15-1C5	V-10-1C5	V-15-1C5-T	V-10-1C5-T
	terminals (#250) (C)	SPST-NC		V-15-2C5	V-10-2C5		
	(-)	SPST-NO		V-15-3C5	V-10-3C5		
		SPDT	0.98N		V-10-1C4		V-10-1C4-T
		SPST-NC			V-10-2C4		
		SPST-NO			V-10-3C4		
		SPDT		V-151-1A6		V-151-1A6-T	
		SPST-NC	3.92N	V-151-2A6			
		SPST-NO		V-151-3A6			
	Colder torminals	SPDT		V-151-1A5	V-101-1A5	V-151-1A5-T	V-101-1A5-T
	Solder terminals (A)	SPST-NC	1.96N	V-151-2A5	V-101-2A5		
	()	SPST-NO		V-151-3A5	V-101-3A5		
		SPDT			V-101-1A4		V-101-1A4-T
		SPST-NC	0.98N		V-101-2A4		
		SPST-NO			V-101-3A4		
		SPDT		V-151-1C26		V-151-1C26-T	
		SPST-NC	3.92N	V-151-2C26			
		SPST-NO		V-151-3C26			
Short hinge lever	Quick connect	SPDT		V-151-1C25	V-101-1C25	V-151-1C25-T	V-101-1C25-T
<u> </u>	Quick-connect terminals (#187)	SPST-NC	1.96N	V-151-2C25	V-101-2C25		
<u>-</u>	(C2)	SPST-NO		V-151-3C25	V-101-3C25		
		SPDT			V-101-1C24		V-101-1C24-T
		SPST-NC	0.98N		V-101-2C24		
		SPST-NO	-		V-101-2C24 V-101-3C24		
		SPDT		V-151-1C6		V-151-1C6-T	
		SPST-NC	3.92N	V-151-1C6			
			J.#ZIN				
		SPST-NO		V-151-3C6	 V 404 405	 V 454 405 T	V 404 405 T
	Quick-connect	SPDT		V-151-1C5	V-101-1C5	V-151-1C5-T	V-101-1C5-T
	terminals (#250) (C)	SPST-NC	1.96N	V-151-2C5	V-101-2C5		
	(5)	SPST-NO		V-151-3C5	V-101-3C5		
		SPDT			V-101-1C4		V-101-1C4-T
		SPST-NC	0.98N		V-101-2C4		
		SPST-NO			V-101-3C4		

			Ratings			Heat-re	esistive
Actuator	Terminals	Contact form	Maximum operating force (OF)	15A	10A	15A	10A
		SPDT		V-152-1A6		V-152-1A6-T	
		SPST-NC	2.45N	V-152-2A6			
		SPST-NO		V-152-3A6			
		SPDT		V-152-1A5	V-102-1A5	V-152-1A5-T	V-102-1A5-T
	Solder terminals		1.23N	V-152-2A5	V-102-2A5		
	(A)	SPST-NO		V-152-3A5	V-102-3A5		
		SPDT			V-102-1A4		V-102-1A4-T
		SPST-NC	0.59N		V-102-2A4		
		SPST-NO			V-102-3A4		
		SPDT		V-152-1C26		V-152-1C26-T	
		SPST-NC	2.45N	V-152-2C26			
		SPST-NO		V-152-3C26			
Hinge lever	Quick-connect	SPDT		V-152-1C25	V-102-1C25	V-152-1C25-T	V-102-1C25-T
	terminals (#187)	SPST-NC	1.23N	V-152-2C25	V-102-2C25		
<u>~~</u>	(C2)	SPST-NO		V-152-3C25	V-102-3C25		
		SPDT			V-102-1C24		V-102-1C24-T
		SPST-NC	0.59N				
		SPST-NO			V-102-3C24		
		SPDT		V-152-1C6		V-152-1C6-T	
		SPST-NC	2.45N	V-152-2C6			
		SPST-NO		V-152-3C6			
	Quick-connect	SPDT	1.23N	V-152-1C5	V-102-1C5	V-152-1C5-T	V-102-1C5-T
	terminals (#250)	SPST-NC		V-152-2C5	V-102-2C5		
	(C)	SPST-NO		V-152-3C5	V-102-3C5		
		SPDT	0.59N		V-102-1C4		V-102-1C4-T
		SPST-NC			V-102-2C4		
		SPST-NO			V-102-3C4		
		SPDT		V-153-1A6		V-153-1A6-T	
		SPST-NC	1.27N	V-153-2A6			
		SPST-NO		V-153-3A6			
	Solder terminals	SPDT		V-153-1A5	V-103-1A5	V-153-1A5-T	V-103-1A5-T
	(A)	SPST-NC	0.69N	V-153-2A5	V-103-2A5		
		SPST-NO		V-153-3A5	V-103-3A5		
		SPDT			V-103-1A4	-	V-103-1A4-T
		SPST-NC	0.34N		V-103-2A4		
		SPST-NO			V-103-3A4		
		SPDT		V-153-1C26		V-153-1C26-T	
		SPST-NC	1.27N	V-153-2C26			
Longhings		SPST-NO		V-153-3C26	 V 402 4025	 V 452 4C25 T	 V 402 4025 T
Long hinge lever	Quick-connect	SPDT	0.001	V-153-1C25	V-103-1C25	V-153-1C25-T	V-103-1C25-T
<u>~</u>	terminals (#187) (C2)	SPST-NC	0.69N	V-153-2C25	V-103-2C25		
		SPST-NO		V-153-3C25	V-103-3C25		 V-103-1C24-T
		SPDT SPST-NC	0.24N		V-103-1C24 V-103-2C24		V-103-1C24-T
		SPST-NC SPST-NO	0.34N		V-103-2C24 V-103-3C24		
		SPDT		V-153-1C6	V-103-3C24	V-153-1C6-T	
		SPST-NC	1.27N	V-153-1C6 V-153-2C6		V-133-1C0-1	
		SPST-NO	1.2111	V-153-2C6 V-153-3C6			
		SPDT		V-153-3C6 V-153-1C5	V-103-1C5	V-153-1C5-T	V-103-1C5-T
	Quick-connect terminals (#250)	SPST-NC	0.69N	V-153-1C5 V-153-2C5	V-103-1C5 V-103-2C5	V-133-103-1	
	(C)	SPST-NO	0.0314	V-153-2C5 V-153-3C5	V-103-2C5 V-103-3C5		
		SPDT		V-133-3C3	V-103-3C3 V-103-1C4		V-103-1C4-T
		SPST-NC	0.34N		V-103-1C4 V-103-2C4		
		SPST-NO	0.0 111		V-103-3C4		
				<u> </u>		1	<u> </u>



Ratings Heat-resistive 15A 10A Actuator **Terminals** Contact form Maximum operating force (OF) 15A 10A **SPDT** V-154-1A6 V-154-1A6-T SPST-NC 2.45N V-154-2A6 SPST-NO V-154-3A6 SPDT V-154-1A5 V-104-1A5 V-154-1A5-T V-104-1A5-T Solder terminals SPST-NC V-154-2A5 V-104-2A5 ---1.23N (A) V-154-3A5 V-104-3A5 SPST-NO SPDT V-104-1A4 V-104-1A4-T SPST-NC V-104-2A4 0.59N SPST-NO V-104-3A4 **SPDT** V-154-1C26 V-154-1C26-T SPST-NC 2.45N V-154-2C26 SPST-NO V-154-3C26 Simulated roller SPDT V-154-1C25 V-104-1C25 V-154-1C25-T V-104-1C25-T Quick-connect lever terminals (#187) SPST-NC V-154-2C25 V-104-2C25 1.23N (C2) SPST-NO V-154-3C25 V-104-3C25 SPDT V-104-1C24 V-104-1C24-T SPST-NC 0.59N V-104-2C24 ---SPST-NO V-104-3C24 ---SPDT V-154-1C6 V-154-1C6-T SPST-NC 2.45N V-154-2C6 SPST-NO V-154-3C6 SPDT V-154-1C5 V-104-1C5 V-154-1C5-T V-104-1C5-T Quick-connect terminals (#250) SPST-NC 1.23N V-154-2C5 V-104-2C5 (C) SPST-NO V-154-3C5 V-104-3C5 SPDT V-104-1C4 V-104-1C4-T SPST-NC V-104-2C4 0.59N ---SPST-NO V-104-3C4 SPDT V-155-1A6 V-155-1A6-T SPST-NC 4.71N V-155-2A6 SPST-NO V-155-3A6 SPDT V-155-1A5 V-105-1A5 V-155-1A5-T V-105-1A5-T Solder terminals SPST-NC V-155-2A5 V-105-2A5 2.35N (A) SPST-NO V-155-3A5 V-105-3A5 SPDT V-105-1A4-T V-105-1A4 SPST-NC 1.18N V-105-2A4 ---SPST-NO V-105-3A4 V-155-1C26 SPDT V-155-1C26-T SPST-NC 4.71N V-155-2C26 SPST-NO V-155-3C26 Short hinge roller SPDT V-155-1C25 V-105-1C25 V-155-1C25-T V-105-1C25-T lever Quick-connect terminals (#187) V-155-2C25 V-105-2C25 SPST-NC 2.35N (C2) SPST-NO V-155-3C25 V-105-3C25 **SPDT** V-105-1C24 V-105-1C24-T SPST-NC 1.18N V-105-2C24 SPST-NO V-105-3C24 SPDT V-155-1C6 V-155-1C6-T SPST-NC V-155-2C6 4.71N SPST-NO V-155-3C6 SPDT V-155-1C5 V-105-1C5 V-155-1C5-T V-105-1C5-T Quick-connect terminals (#250) SPST-NC 2.35N V-155-2C5 V-105-2C5 (C) SPST-NO V-155-3C5 V-105-3C5 **SPDT** V-105-1C4 V-105-1C4-T SPST-NC 1.18N V-105-2C4 ---SPST-NO V-105-3C4




			Ratings	450	404	Heat-re	esistive
Actuator	Terminals	Contact form	Maximum operating force (OF)	15A	10A	15A	10A
		SPDT		V-156-1A6		V-156-1A6-T	
		SPST-NC	2.45N	V-156-2A6			
		SPST-NO		V-156-3A6			
		SPDT		V-156-1A5	V-106-1A5	V-156-1A5-T	V-106-1A5-T
	Solder terminals (A)	SPST-NC	1.23N	V-156-2A5	V-106-2A5		
	(7.1)	SPST-NO		V-156-3A5	V-106-3A5		
		SPDT			V-106-1A4		V-106-1A4-T
		SPST-NC	0.59N		V-106-2A4		
		SPST-NO			V-106-3A4		
		SPDT		V-156-1C26		V-156-1C26-T	
		SPST-NC	2.45N	V-156-2C26			
	Quick-connect terminals (#187) (C2)	SPST-NO		V-156-3C26			
Hinge roller lever		SPDT	1.23N	V-156-1C25	V-106-1C25	V-156-1C25-T	V-106-1C25-T
9		SPST-NC		V-156-2C25	V-106-2C25		
-		SPST-NO		V-156-3C25	V-106-3C25		
		SPDT			V-106-1C24		V-106-1C24-T
		SPST-NC	0.59N		V-106-2C24		
		SPST-NO			V-106-3C24		
		SPDT		V-156-1C6		V-156-1C6-T	
		SPST-NC	2.45N	V-156-2C6			
		SPST-NO		V-156-3C6			
	Quick-connect	SPDT		V-156-1C5	V-106-1C5	V-156-1C5-T	V-106-1C5-T
	terminals (#250)	SPST-NC	1.23N	V-156-2C5	V-106-2C5		
	(C)	SPST-NO		V-156-3C5	V-106-3C5		
		SPDT			V-106-1C4		V-106-1C4-T
		SPST-NC	0.59N		V-106-2C4		
		SPST-NO			V-106-3C4		

For DC load (V-21(IN) models)

Actuator	Terminals	Contact form	Ratings Maximum operating force (OF)	30VDC 12A
Pin plunger	Quick-connect terminals (#250) (C)	SPDT	3.92N	V-21-1C6(IN)

Contact form

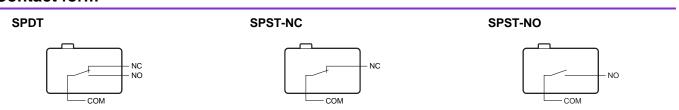



Contact Specifications

Item Model		Model V-21 V-16 V-15 V-10 \				V-21(IN)	
	Specification		•	Rivet	•		
Contact	ontact Material		Silver alloy Silver				
	Gap (standard value)	1 mm					
Inrush	NC	50 A	40 A	30 A	24 A	50 A	
current	NO	max. max. max.		max.	max.		
Minimum applicable load (reference value)		DC5V 160mA					

Ratings

Model	Item Rated voltage	Resistive load
	AC250V	21 A
V-21	DC125V	0.6 A
	DC250V	0.3 A
	AC250V	16 A
V-16	DC125V	0.6 A
	DC250V	0.3 A
	AC250V	15 A
V-15	DC125V	0.6 A
	DC250V	0.3 A
	AC250V	10 A
V-10	DC125V	0.6 A
	DC250V	0.3 A
V-21(IN)	DC30V	12 A

Note. The above rating values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C (2) Ambient humidity: 65±5% RH
- (3) Operating frequency: 30 operations/min

Approved Standards

UL (UL61058-1)/cUL (CSA C22.2 No.61058-1)

Rated voltage	Model	V-21	V-16	V-15	V-10
125 VAC 250 VAC		21A 1/2HP	16A 1/2HP	15A 1/2HP	10A 1/2HP
125 VDC 250 VDC		0.6A 0.3A			

VDE (EN61058-1)

Consult your OMRON sales representative for specific models with VDE approvals.

Rated voltage	Model	V-21	V-16
AC250V		20(4)A	16(4)A

Testing conditions: 5E4 (50,000 operations), for models of V-21: T80 (0 to 80°C), for models of V-16: T105 (0 to 105°C) Note. V-21(IN) models are not Safety standard approved.

Characteristics

Item	Model	V-10	V-15	V-16	V-21	V-21(IN)	
Permissible ope	rating speed	0.1mm to 1 m/s max. (pin plunger models)					
Permissible operating	Mechanical		600 operat	er models)			
frequency	Electrical			60 operations/min			
Insulation resista	ance		100MΩ min	. (at 500 VDC with insula	ation tester)		
Contact resistar	nce (initial value)			15mΩ max.			
	Between terminals of the same polarity		Α	C1,000V 50/60Hz 1min	n		
Dielectric strength *1	Between current- carrying metal parts and ground	AC1,500V 50/60Hz 1min	AC1,500V 50/60Hz 1min	,	AC2,000V 50/60Hz 1mir	1	
	Between each terminals and non-current-carrying metal parts	AC1,500V 50/60Hz 1min	AC1,500V 50/60Hz 1min	,	AC2,000V 50/60Hz 1min		
Vibration resistance *2	Malfunction	10 to 55 Hz, 1.5-mm double amplitude					
Shock	Durability	1,000 m/s² {approx. 100 G} max.					
resistance *2	Malfunction	200 m/s ² {approx. 20G} max.	200 m/s ² {approx. 20G} max. 300 m/s ² {approx. 30 G} max.				
	Mechanical	50,000,000 operations min. (60 operations/min)					
Durability *3	Electrical	300,000 operations min. (30 operations/min) Heat resistive: 50,000 operations min (30 operations/min)	100,000 operations min. (30 operations/min) Heat resistive: 20,000 operations min (30 operations/min)	(30 operations/min) Heat resistive: 20,000 operations min 100,000 operations min. (30 operations/min)			
Degree of prote	ction	IEC IP40					
Degree of protecti	ion against electric shock			Class I			
Proof tracking in	ndex (PTI)			175			
Ambient energi	ng tomporaturo	-25 to 105°C (Heat resistive: -25 to 150°C) -25 to 105°C -25 to 80°C			80°C		
Ambient operati	ng temperature	-25 to 105°C (V-21 series: -25 to 80°C) (Heat resistive: -25 to 150°C) at ambient humidity of 60% max. (with no icing or condensation)					
Ambient operati	ng humidity	85% max. (for 5 to 35°C)					
Weight		Approx. 6.2g (pin plunger models)					

Note. The data given above are initial values.


- The dielectric strength shown in the table indicates a value for models with a Separator.
- For the pin plunger models, the above values apply for use at the free position and total travel position. For the lever models, they apply at the total travel position. Close or open circuit of the contact is shorter than 1 ms.
- For testing conditions, consult your OMRON sales representative.

Terminals and Apperance (Unit: mm)

Solder terminals (A)	Quick-connect terminals (#187) (C2)	Quick-connect terminals (#250) (C)
(5.5) (6.5) (10) Three, solder terminals	(5.5) (6.5) (10) 2.9 Three, quick-connect terminals (#187)	(4.9) (7.7) 3.2 Three, quick-connect terminals (#250)
2.4 dia. 1.6 dia. * Indicates the length to the center of the 1.6-dia. holes	6.35 3.2 4.75±0.1 1.6-dia. terminal hole	3.95 - 6.35±0.1 1.65-dia. terminal hole

Note. The above is for the SPDT contact specifications. Two terminals will be available for SPST-NO or SPST-NC contact specifications. For terminal positions, refer to Contact form on page 9.

Mounting Holes (Unit: mm)





Dimensions and Operating Characteristics

Thermoplastic Case V-21/-16/-21(IN) Models

The following illustrations and drawings are for quick-connect terminals #250 (terminals C). V models with a switching current of 16 A and 11 A incorporate solder terminals (A) and quick-connect terminals #187 (C2). These models are different from #250 models in terminal size only. Dimensions of solder terminals (A) and quick-connect terminal #187 (C2) are omitted. Please refer to the "Terminals and Shapes" on previous page.

The □ is replaced with the code for the terminals. See the "List of Models" for available combinations of shapes.


●Pin plunger

V-21-1□6

V-16-1□6

V-16-1□5



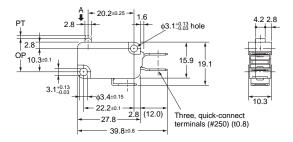

Operating characteristics	Model	V-21-1□6 V-16-1□6	V-16-1□5	
OF max.		3.92N	1.96N	
RF min.		0.78N	0.49N	
PT max.		1.2mm		
OT min.		1.0mm		
MD max.		0.4mm		
OP		14.7±0	0.4mm	


Short hinge lever

V-211-1□6

V-161-1□6

V-161-1□5



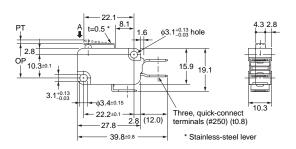

Operating characteristics	Model	V-211-1□6 V-161-1□6	V-161-1□5	
OF max.		3.92N	1.96N	
RF min.		0.49N	0.49N	
PT max.		1.6mm		
OT min.		0.8mm		
MD max.		0.6	mm	
OP		15.2±0.5mm		


●Hinge lever

V-212-1□6

V-162-1□6


V-162-1□5



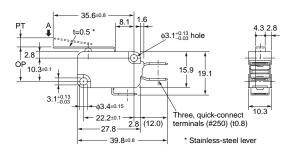

Operating characteristics	Model	V-212-1□6 V-162-1□6	V-162-1□5	
OF max.		2.45N	1.23N	
RF min.		0.25N	0.14N	
PT max.		4.0mm		
OT min.		1.6	mm	
MD max.		1.5	mm	
OP		15.2±1.2mm		

●Long Hinge Lever Models

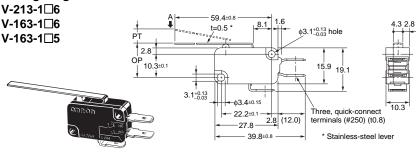

Operating characteristics	Model	V-213-1□6 V-163-1□6	V-163-1□5	
OF max.		1.27N	0.69N	
RF min.		0.12N	0.06N	
PT max.		9.0	mm	
OT min.		2.0mm		
MD max.		2.8		
OP		15.2 ^{+2.6} _{-3.2} mm		


Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (\P).

Simulated roller lever

V-214-1□6 V-164-1□6 V-164-1□5



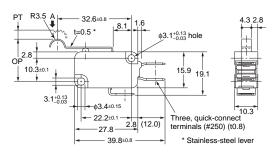


Operating characteristics	Model	V-214-1□6 V-164-1□6	V-164-1□5	
OF max.		2.45N	1.23N	
RF min.		0.25N	0.14N	
PT max.		4.0mm		
OT min.		1.6	mm	
MD max.		1.5	mm	
OP		18.7±1.2mm		

●Short hinge roller lever

V-215-1□6 V-165-1□6 V-165-1□5



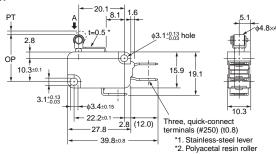

Operating characteristics	Model	V-215-1□6 V-165-1□6	V-165-1□5		
OF max.		4.71N	2.35N		
RF min.		0.49N	0.49N		
PT max.	T max.		1.6mm		
OT min.		0.8	mm		
MD max.		0.6	mm		
OP		20.7±0.6mm			


●Hinge roller lever

V-216-1□6

V-166-1□6

V-166-1□5



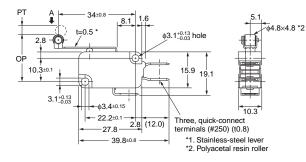

Operating characteristics	Model	V-216-1□6 V-166-1□6	V-166-1□5	
OF max.		2.45N	1.23N	
RF min.		0.25N	0.14N	
PT max.		4.0mm		
OT min.		1.6	mm	
MD max.		1.5	mm	
OP		20.7±1.2mm		

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (\P).



Thermosetting Case (V-15/V-10 Models) Applicable to both Standard (105°C) and Heat-resistive (150°C) models

The following dimensions and Operating Characteristics are for both "Not specified: Standard (105°C)" and "-T: Heat-resistive (150°C)" models. The following illustrations and drawings are for solder terminals (Terminal A). V models with a switching current of 15A and 10A have quick-connect terminals #187 (C2). These models are different from solder terminal models in terminal size only. Illustrations for quick-connect terminals #187 (C2) are omitted. Please refer to "Terminals and Shapes" on page 8.

The \square is replaced with the code for the terminals.See the "List of Models" for available combinations of shapes.

●Pin plunger


V-15-1□6

V-15-1□5

V-10-1□5

V-10-1□4



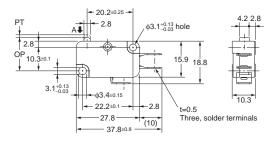

Operating characteristics	Model	V-15-1□6	V-15-1□5 V-10-1□5	V-10-1□4
OF max.		3.92N	1.96N	0.98N
RF min.		078N	0.49N	0.20N
PT max.			1.2mm	•
OT min.			1.0mm	
MD max.			0.4mm	
OP			14.7±0.4mm	1

Short hinge lever


V-151-1□6

V-151-1□5

V-101-1□5

V-101-1□4



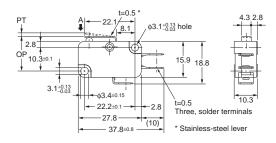

Operating characteristics	Model	V-151-1□6	V-151-1□5 V-101-1□5	V-101-1□4
OF max.		3.92N	1.96N	0.98N
RF min.		0.49N	0.49N	0.15N
PT max.		1.6mm		
OT min.		0.8mm		
MD max.			0.6mm	
OP		1	15.2±0.5mn	n

Hinge lever


V-152-1□6

V-152-1□5

V-102-1□5


V-102-1□4



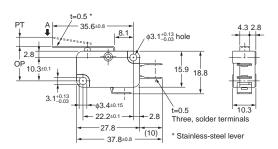

Operating characteristics	Model	V-152-1□6	V-152-1□5 V-102-1□5	V-102-1□4
OF max.		2.45N	1.23N	0.59N
RF min.		0.25N	0.14N	0.06N
PT max.		4.0mm		
OT min.		1.6mm		
MD max.			1.5mm	
OP		1	5.2±1.2mn	n

●Long Hinge Lever Models

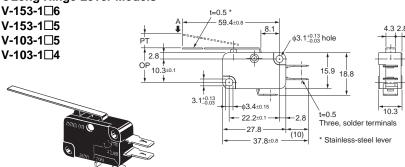

Operating characteristics	Model	V-153-1□6	V-153-1□5 V-103-1□5	V-103-1□4
OF max.		1.27N	0.69N	0.34N
RF min.		0.12N	0.06N	-
PT max.		9.0mm		9.0mm
OT min.		2.0mm		3.2mm
MD max.		2.8mm		2.8mm
OP		15.2 ^{+2.6} _{-3.2} mm		15.2±2.6
				mm


Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (♣).

●Simulated roller lever

V-154-1□6 V-154-1□5 V-104-1□5 V-104-1□4



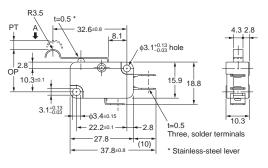


Operating characteristics	Model	V-154-1□6	V-154-1□5 V-104-1□5	V-104-1□4
OF max.		2.45N	1.23N	0.59N
RF min.		0.25N	0.14N	0.06N
PT max.			4.0mm	
OT min.		1.6mm		
MD max.			1.5mm	
ОР		18.7±1.2mm		

V

●Short hinge roller lever

V-155-1□6 V-155-1□5 V-105-1□5 V-105-1□4



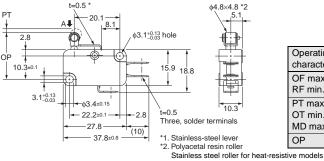

Operating characteristics	Model	V-155-1□6	V-155-1□5 V-105-1□5	V-105-1□4
OF max. RF min.		4.71N 0.49N	2.35N 0.49N	1.18N 0.15N
PT max. OT min. MD max.			1.6mm 0.8mm 0.6mm	
OP		20.7±0.6mm		

Hinge roller lever


V-156-1□6

V-156-1□5

V-106-1□5

V-106-1□4



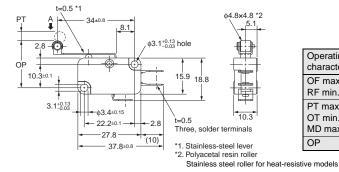

Operating Model characteristics	V-156-1□6	V-156-1⊔5 V-106-1□5	V-106-1□4
OF max.	2.45N	1.23N	0.59N
RF min.	0.25N	0.14N	0.06N
PT max.	4.0mm		
OT min.	1.6mm		
MD max.	1.5mm		
OP	20.7±1.2mm		

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (\P).

Precautions

★Please read "Common Precautions" for correct use.

Precautions for Safe Use

●Soldering

Connecting to Solder Terminals

Complete the soldering at the iron tip temperature of 250 to 350°C (60W) within 5 seconds, and do not apply any external force for 1 minute after soldering.

Be sure to apply only the minimum required amount of flux.lt may result in contact failure once the flux penetrates into the internal part of the Switch.

Connecting to Quick-connect Terminals #187
 Insert the receptacle of quick-connect terminal #187 straight toward the terminal.

Applying excessive external force horizontally or vertically may cause deformation of terminals and may damage the housings.

Connecting to Quick-connect Terminals #250
 Insert the receptacle of quick-connect terminal #250 straight toward the terminal.

Applying excessive external force horizontally or vertically may cause deformation of terminals and may damage the housings.

Precautions for Correct Use

Mounting

Use M3 mounting screw with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.39 to 0.59N·m {4 to 6 kgf·cm}.



Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas

https://components.omron.com/us

Asia-Pacific

https://components.omron.com/ap

Korea

https://components.omron.com/kr

Europe

https://components.omron.com/eu

China

https://components.omron.com.cn

Japan

https://components.omron.com/jp

© OMRON Corporation 2007-2022 All Rights Reserved. In the interest of product improvement, specifications are subject to change without notice.

Cat. No. B010-E1-19 1122 (0207)