Data Sheet No. PD 10034 revJ

International TOR Rectifier

Series PVN012 & PbF

Microelectronic Power IC HEXFET® Power MOSFET Photovoltaic Relay Single Pole, Normally Open, 0-20V, 2.5AAC/ 4.5ADC

General Description

The PVN012 Series Photovoltaic Relay at 100 milliohms features the lowest possible on-state resistance in a miniature package — lower than a comparable reed relay.

The PVN012 is a single-pole, normally open solidstate relay. It utilizes a GenerationV HEXFET output switch, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED) which is optically isolated from the photovoltaic generator.

These units exceed the performance capabilities of electromechanical relays in life, sensitivity, stable on-resistance, miniaturization, magnetic insensitivity and ruggedness. They are ideally suited for switching high currents or low level signals without distortion or injection of electrical noise.

Series PVN012 Relays are packaged in a 6-lead molded DIP package with either thru-hole or surface mount (gull-wing) terminals. They are available in standard plastic shipping tubes or on tapeand-reel. Please refer to part identification information opposite.


Applications

- Portable Electronics
- Programmable Logic Controllers
- Computers and Peripheral Devices
- Audio Equipment
- Power Supplies and Power Distribution
- Instrumentation

Features

- 100mΩ On-Resistance
- GenV HEXFET output
- Bounce-free operation
- 2.5 4.5 Amp capacity
- Linear AC/DC operation
- 4,000 V_{RMS} I/O isolation
- Solid-State reliability
- UL recognized
- ESD Tolerance:

4000V Human Body Model 500V Machine Model



Part Identification

PVN012 & PbF PVN012S & PbF PVN012S-T & PbF thru-hole surface-mount surface-mount, tape and reel



Electrical Specifications (-40°C \leq T_A \leq +85°C unless otherwise specified)


INPUT CHARACTERISTICS	Limits	Units
Minimum Control Current (see figure 1)	3.0	mA
Maximum Control Current for Off-State Resistance @ T _A = +25°C	0.4	mA
Control Current Range (Caution: current limit input LED, see figure 6)	3.0 to 25	mA
Maximum Reverse Voltage	6.0	V


OUTPUT CHARACTERISTICS	Limits	Units
Operating Voltage Range	0 to ±20	V(DC or AC peak)
Maximum Continuous Load Current @ T _A =+40°C, 5mA Control (see figure 1)		
A Connection	2.5	A (DC or AC)
B Connection	3.0	A (DC)
C Connection	4.5	A (DC)
Maximum Pulsed Load Current @T _A =+25°C, (100 ms @ 10% duty cycle)		
A Connection	6.0	A (DC or AC)
Maximum On-State Resistance @T _A =+25°C, for 1A pulsed load, 5mA Control (see figure 4)		
A Connection	100	
B Connection	65	m $Ω$
C Connection	40	
Minimum Off-State Resistance @ T _A =+25°C, ±16V _{DC}	0.16 x 10 ⁸	Ω
Maximum Turn-On Time @T _A =+25°C (see figure 7), for 1A, 20 V _{DC} load, 5mA Control	5.0	ms
Maximum Turn-Off Time @T _A =+25°C (see figure 7), for 1A, 20 V _{DC} load, 5mA Control	0.5	ms
Maximum Output Capacitance @ 20V _{DC} (see figure 2)	300	pF


GENERAL CHARACTERISTICS		Limits	Units
Minimum Dielectric Strength, Input-Output		4000	VRMS
Minimum Insulation Resistance, Input-Output, @T _A =+25	5°C, 50%RH, 100V _{DC}	1012	Ω
Maximum Capacitance, Input-Output		1.0	pF
Maximum Pin Soldering Temperature (10 seconds ma	aximum)	+260	
Ambient Temperature Range:	Operating	-40 to +85	°C
	Storage	-40 to +100	

International Rectifier does not recommend the use of this product in aerospace, avionics, military or life support applications. Users of this International Rectifier product in such applications assume all risks of such use and indemnify International Rectifier against all damages resulting from such use.

Connection Diagrams









International TOR Rectifier

Series PVN012 & PbF

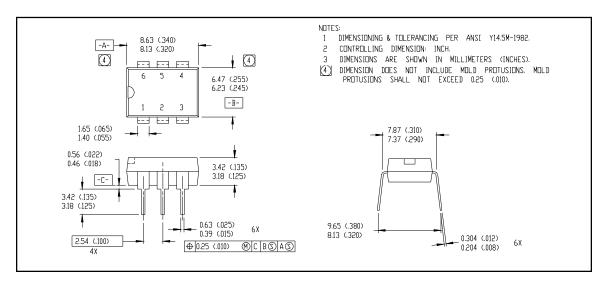

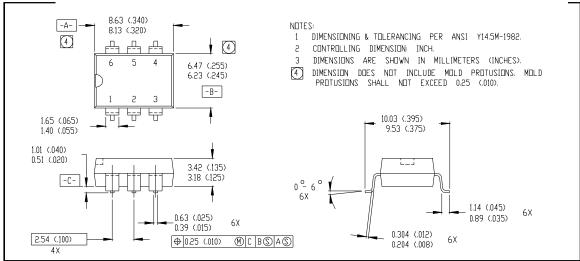

International ICR Rectifier