Data Sheet No. PD 10064 revA

International TOR Rectifier

Series PVN012APbF

Microelectronic Power IC HEXFET® Power MOSFET Photovoltaic Relay Single Pole, Normally Open, 0-20V, 4.0A AC/ 6.0A DC

General Description

The PVN012A Series Photovoltaic Relay at 50 milliohms features the lowest possible on-state resistance in a miniature package — lower than a comparable reed relay.

The PVN012A is a single-pole, normally open solidstate relay. It utilizes a HEXFET® MOSFET output switch, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED) which is optically isolated from the photovoltaic generator.

These units exceed the performance capabilities of electromechanical relays in life, sensitivity, stable on-resistance, miniaturization, magnetic insensitivity and ruggedness. They are ideally suited for switching high currents or low level signals without distortion or injection of electrical noise.

Series PVN012A relays are packaged in a 6-lead molded DIP package with either thru-hole or surface mount (gull-wing) terminals. They are available in standard plastic shipping tubes or on tapeand-reel. Please refer to part identification information.


Applications

- Portable Electronics
- Computers and Peripheral Devices
- Audio Equipment
- Power Supplies and Power Distribution
- Instrumentation

Features

- 50mΩ On-Resistance
- Bounce-free Operation
- 4.0 6.0 Amp Capacity
- Linear AC/DC Operation
- 4,000 V_{RMS} I/O Isolation
- Solid-State Reliability
- UL Recognition Pending
- ESD Tolerance:

4000V Human Body Model 500V Machine Model



Part Identification

PVN012APbF Thru-hole
PVN012ASPbF Surface-mount
PVN012AS-TPbF Surface-mount, tape

and reel

(HEXFET is the registered trademark for International Rectifier Power MOSFETs)

www.irf.com 1



Electrical Specifications (-40°C \leq T_A \leq +85°C unless otherwise specified)

INPUT CHARACTERISTICS	Limits	Units
Minimum Control Current (see figure 1)	5.0	mA
Maximum Control Current for Off-State Resistance @ T _A = +25°C	0.4	mA
Control Current Range (Caution: current limit input LED, see figure 6)	5.0 to 25.0	mA
Maximum Reverse Voltage	6.0	V

OUTPUT CHARACTERISTICS	Limits	Units
Operating Voltage Range	0 to ±20	V(DC or AC peak)
Maximum Continuous Load Current @ 40°C, 10mA Control (see figure 1)		
A Connection	4.0	A (DC or AC)
B Connection	4.5	A (DC)
C Connection	6.0	A (DC)
Maximum Pulsed Load Current @ 25°C,10mA Control (100 mS @ 10% duty cycle)		
A Connection	8.0	A (DC or AC)
B Connection	9.0	A (DC)
C Connection	15.0	A (DC)
Typical Thermal Resistance (Tthja, Junction-to-Ambient)		
A Connection	85.1	(°C/W)
B Connection	122.9	(°C/W)
C Connection	89.7	(°C/W)
Maximum On-State Resistance @25°C, 10mA Control 100mA pulsed load, (see figs. 3 & 4)		
A Connection	50	mΩ
B Connection	25	mΩ
C Connection	15	mΩ
Maximum Off-State Leakage @ T _A =+25°C, ±20V _{DC}	1.0	μΑ
Maximum Turn-On Time @T _A =+25°C (see figure 7), for 1A, 20 V _{DC} load, 10mA Control	3.0	ms
Maximum Turn-Off Time @T _A =+25°C (see figure 7), for 1A, 20 V _{DC} load, 10mA Control	0.5	ms
Typical Output Capacitance @ 20V _{DC} (see figure 2)	400	pF


GENERAL CHARACTERISTICS		Limits	Units
Minimum Dielectric Strength, Input-Output		4000	VRMS
Minimum Insulation Resistance, Input-Output		1012	Ω
Maximum Capacitance, Input-Output, Vd =0V, f = 1MF	Hz	1.0	pF
Maximum Pin Soldering Temperature		+260	
Ambient Temperature Range:	Operating	-40 to +85	℃
	Storage	-40 to +100	

International Rectifier does not recommend the use of this product in aerospace, avionics, military or life support applications. Users of this International Rectifier product in such applications assume all risks of such use and indemnify International Rectifier against all damages resulting from such use.


<u>www.irf.com</u> 2

"A" Connection

Connection Diagrams

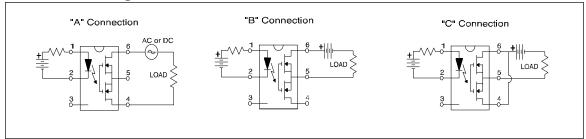

1200








Figure 1. Current Derating Curves*

Figure 2. Typical Output Capacitance








Figure 3. Linearity Characteristics

Figure 4. Typical Normalized On-Resistance

<u>www.irf.com</u> 3

International TOR Rectifier




Figure 5. Typical Normalized Off-State Leakage




Figure 6. Input Characteristics (Current Controlled)




Figure 7. Typical Delay Times






Figure 8. Delay Time Definitions

www.irf.com

Case Outlines

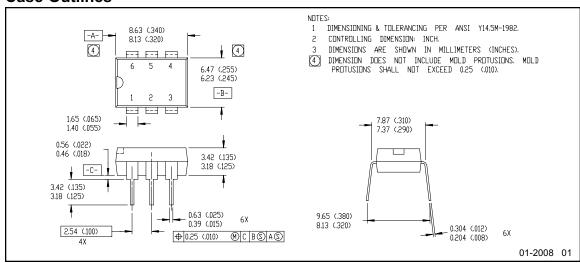

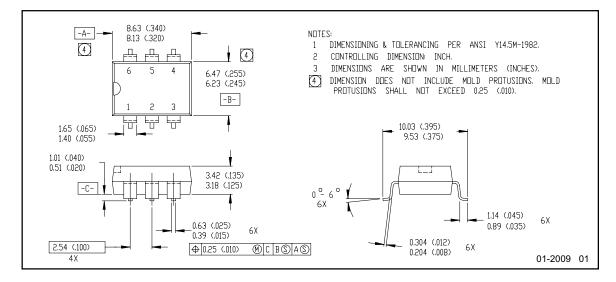

International TOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105

This product has been designed and qualified for the Industrial market

Data and specifications subject to change without notice. 9/7/2006

www.irf.com 5