



**Variable frequency drive SVX 3-/3-phase 22 kW 480 V; degree of protection IP21; integrated EMC filter and braking transistor**

**Part no.** SVX030A1-4A1B1  
**Catalog No.** 125693  
**Eaton Catalog No.** SVX030A1-4A1B1  
**EL-Nummer (Norway)** 4132591

## Delivery program

|                                  |          |    |   |
|----------------------------------|----------|----|---|
| Product range                    |          |    | Variable frequency drives   |
| Part group reference (e.g. DIL)  |          |    | SVX   |
| Rated operational voltage        | $U_e$    |    | 400 V AC, 3-phase<br>480 V AC, 3-phase<br>500 V AC, 3-phase                             |
| Output voltage with $V_e$        | $U_2$    |    | 400 V AC, 3-phase<br>480 V AC, 3-phase<br>500 V AC, 3-phase                             |
| Mains voltage (50/60Hz)          | $U_{LN}$ | V  | 380 (-15%) - 500 (+10%)   |
| <b>Rated operational current</b> |          |    |   |
| At 150% overload                 | $I_e$    | A  | 46  |
| At 110% overload                 | $I_e$    | A  | 61  |
| Note                             |          |    | Overload cycle for 60 s every 600 s   |
| <b>Assigned motor rating</b>     |          |    |   |
| Note                             |          |    | For AC motors with internal and external ventilation with 50 Hz / 60 Hz                 |
| Note                             |          |    | Overload cycle for 60 s every 600 s   |
| Note                             |          |    | at 400 V, 50 Hz   |
| 150 % Overload                   | P        | kW | 22  |
| 110 % Overload                   | P        | kW | 30  |
| 150 % Overload                   | $I_M$    | A  | 41  |
| 110 % Overload                   | $I_M$    | A  | 55  |
| Note                             |          |    | at 440 - 480 V, 60 Hz   |
| 150 % Overload                   | P        | HP | 30  |
| 110 % Overload                   | P        | HP | 40  |
| 150 % Overload                   | $I_M$    | A  | 40  |
| 110 % Overload                   | $I_M$    | A  | 52  |
| Degree of Protection             |          |    | IP21  |
| Fieldbus connection (optional)   |          |    | PROFIBUS-DP<br>LonWorks<br>CANopen®<br>DeviceNet<br>Modbus-TCP<br>BACnet/IP             |
| Fitted with                      |          |    | Radio interference suppression filter<br>Brake chopper<br>OLED display<br>DC link choke |
| Frame size                       |          |    | FR6   |
| Connection to SmartWire-DT       |          |    | No  |

## Technical data

|                    |  |  |   |
|--------------------|--|--|---|
| <b>General</b>     |  |  |   |
| Standards          |  |  | Specification for general requirements: IEC/EN 61800-2<br>EMC requirements: IEC/EN 61800-3<br>Safety requirements: IEC/EN 61800-5-1 |
| Certifications     |  |  | CE, UL, cUL, RCM  |
| Production quality |  |  | RoHS, ISO 9001  |

|                                   |          |    |   |
|-----------------------------------|----------|----|---|
| Climatic proofing                 | $\rho_w$ | %  | < 95% relative humidity, no condensation, no corrosion, no dripping water   |
| Ambient temperature               |          |    |   |
| operation (150 % overload)        | $\theta$ | °C | -10 - +50   |
| operation (110 % overload)        | $\theta$ | °C | -10 - +40   |
| Storage                           | $\theta$ | °C | -40 - +70   |
| Radio interference level          |          |    |   |
| Radio interference class (EMC)    |          |    | C2, C3, depending on the motor cable length, the connected load, and ambient conditions. External radio interference suppression filters (optional) may be necessary. |
| Environment (EMC)                 |          |    | 1st and 2nd environments as per EN 61800-3  |
| Mounting position                 |          |    | Vertical  |
| Altitude                          |          | m  | 0 - 1000 m above sea level<br>above 1000 m with 1 % performance reduction per 100 m<br>max. 3000 m  |
| Degree of Protection              |          |    | IP21  |
| Protection against direct contact |          |    | BGV A3 (VBG4, finger- and back-of-hand proof)   |

## Main circuit

|                                       |            |     |   |
|---------------------------------------|------------|-----|---|
| Supply                                |            |     |   |
| Rated operational voltage             | $U_e$      |     | 400 V AC, 3-phase<br>480 V AC, 3-phase<br>500 V AC, 3-phase                             |
| Mains voltage (50/60Hz)               | $U_{LN}$   | V   | 380 (-15%) - 500 (+10%)   |
| System configuration                  |            |     | AC supply systems with earthed center point   |
| Supply frequency                      | $f_{LN}$   | Hz  | 50/60   |
| Frequency range                       | $f_{LN}$   | Hz  | 45 - 66   |
| Power section                         |            |     |   |
| Function                              |            |     | Frequency inverter with internal DC link and IGBT inverter                              |
| Output voltage with $V_e$             | $U_2$      |     | 400 V AC, 3-phase<br>480 V AC, 3-phase<br>500 V AC, 3-phase                             |
| Output Frequency                      | $f_2$      | Hz  | 0 - 50/60 (max. 320)  |
| Switching frequency                   | $f_{PWM}$  | kHz | 10<br>adjustable 1 - 16   |
| Operation Mode                        |            |     | U/f control<br>sensorless vector control (SLV)  |
| Frequency resolution (setpoint value) | $\Delta f$ | Hz  | 0.01  |
| Rated operational current             |            |     |   |
| At 150% overload                      | $I_e$      | A   | 46  |
| At 110% overload                      | $I_e$      | A   | 61  |
| Fitted with                           |            |     | Radio interference suppression filter<br>Brake chopper<br>OLED display<br>DC link choke |
| Frame size                            |            |     | FR6   |
| Motor feeder                          |            |     |   |
| Note                                  |            |     | For AC motors with internal and external ventilation with 50 Hz / 60 Hz                 |
| Note                                  |            |     | Overload cycle for 60 s every 600 s   |
| Note                                  |            |     | at 400 V, 50 Hz   |
| 150 % Overload                        | P          | kW  | 22  |
| 110 % Overload                        | P          | kW  | 30  |
| Note                                  |            |     | at 440 - 480 V, 60 Hz   |
| 150 % Overload                        | P          | HP  | 30  |
| 110 % Overload                        | P          | HP  | 40  |

## Control section

|                          |       |   |  |
|--------------------------|-------|---|--|
| External control voltage | $U_c$ | V | 24 V DC (max. 250 mA)                        |
| Reference voltage        | $U_s$ | V | 10 V DC (max. 10 mA)                         |
| Analog inputs            |       |   | 2, parameterizable, 0 - 10 V DC, 0/4 - 20 mA |
| Analog outputs           |       |   | 1, parameterizable, 0/4 - 20 mA              |
| Digital inputs           |       |   | 6, parameterizable, max. 30 V DC             |
| Digital outputs          |       |   | 1, parameterizable, 48 V DC/50 mA            |

|   |  |  |  |
|---|--|--|--|
| Relay outputs                                     |  |  | 2, parameterizable, N/O, 8 A (24 V DC) / 8 A (250 V AC) / 0,4 A (125 V DC) |
| <b>Assigned switching and protective elements</b> |  |  |  |
| Power Wiring                                      |  |  |  |
| 150 % overload (CT/I <sub>H</sub> , at 50 °C)     |  |  | DX-LN3-080   |
| Motor feeder                                      |  |  |  |
| 150 % overload (CT/I <sub>H</sub> , at 50 °C)     |  |  | DX-LM3-050   |
| 110 % overload (VT/I <sub>L</sub> , at 40 °C)     |  |  | DX-LM3-063   |
| 150 % overload (CT/I <sub>H</sub> , at 50 °C)     |  |  | DX-SIN3-048  |
| 110 % overload (VT/I <sub>L</sub> , at 40 °C)     |  |  | DX-SIN3-061  |


## Design verification as per IEC/EN 61439

|  |                  |   |  |
|--|------------------|---|--|
| Technical data for design verification   |                  |   |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>   | A | 46   |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W | 550  |
| IEC/EN 61439 design verification   |                  |   |  |
| 10.2 Strength of materials and parts   |                  |   |  |
| 10.2.2 Corrosion resistance  |                  |   | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |   | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |   | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |   | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |   | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                  |   | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                  |   | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                  |   | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                  |   | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                  |   |  |
| 10.9.2 Power-frequency electric strength   |                  |   | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                  |   | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                  |   | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                  |   | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                  |   | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                  |   | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                  |   | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Approvals

|                                      |  |  |   |
|--------------------------------------|--|--|---|
| Product Standards                    |  |  | UL 508C; CSA-C22.2 No. 14; IEC/EN61800-3; IEC/EN61800-5; CE marking |
| UL File No.                          |  |  | E134360   |
| UL Category Control No.              |  |  | NMMS, NMMS2, NMMS7, NMMS8   |
| CSA File No.                         |  |  | UL report applies to both US and Canada                             |
| CSA Class No.                        |  |  | 3211-06   |
| North America Certification          |  |  | UL listed, certified by UL for use in Canada                        |
| Specially designed for North America |  |  | No  |
| Suitable for                         |  |  | Branch circuits   |
| Max. Voltage Rating                  |  |  | 3~ 480 V AC IEC: TN-S UL/CSA: "Y" (Solidly Grounded Wey)            |
| Degree of Protection                 |  |  | IEC: IP21   |

## Dimensions

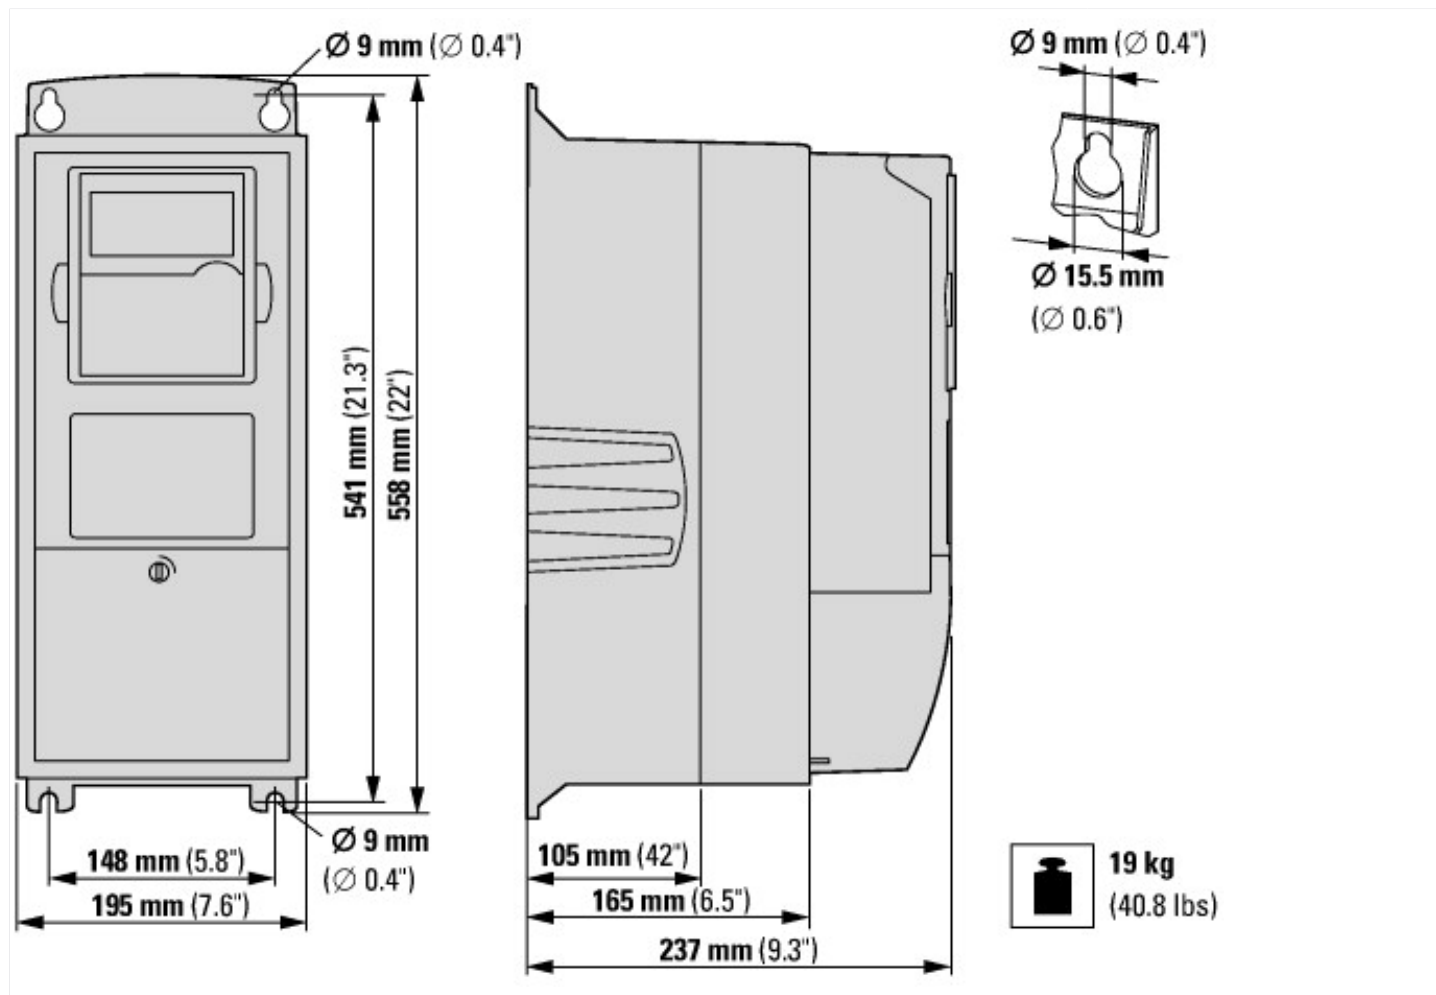

## Additional product information (links)

Documentation

<http://www.eaton.eu/Europe/Electrical/ProductsServices/AutomationControl/SwitchingProtectingDrivingMotors/9000X/SVX9000/index.htm#tabs-4>