

North American Region

[Download User Manual](#)

Universal Charger

EASY

- Easy-to-read LCD screen shows the charging status of the batteries inside




VERSATILE

- Charges up to 8 AA, 8 AAA, 4C, 4D or 1 9V NiMH rechargeable batteries



FAST & EFFICIENT

- Charges 4 AA NiMH batteries in approximately 3 hours
- Energy Star Certified

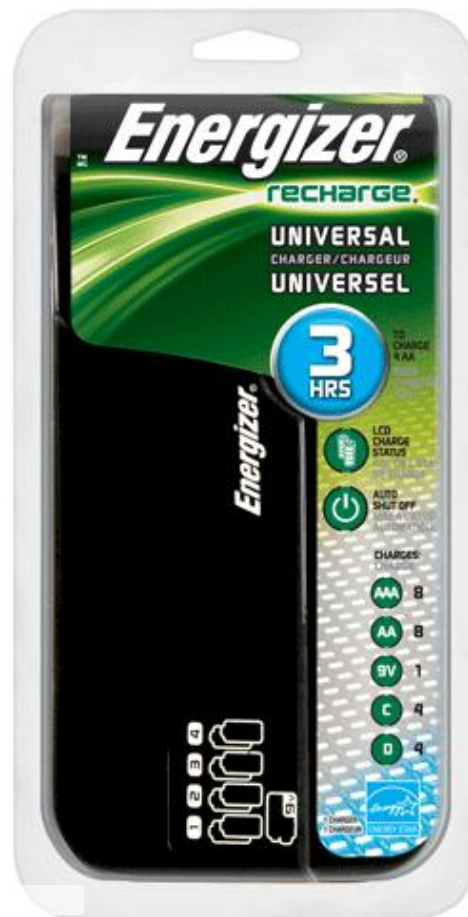

Before Using Your Charger:

Please read all instructions and cautionary markings on the battery charger, batteries, and device.

Best used with Energizer NiMH batteries.

Product Detail:

Designation: Family Charger

Color: Black and Silver

Charging Current: 2 or 4 "AA" 1100mA (1 battery per bay)
1 or 2 "AA-C-D" 1100mA (1 battery per bay)
6 or 8 "AA" 550mA (2 batteries per bay)
3 or 4 "AA-C-D" 550mA (2 batteries per bay)
1 to 4 "AAA" 450mA
2 or 4 "AAA" 450 mA
6 or 8 "AAA" 450 mA
1 "9V" 30mA

Trickle Charge: "AA-C-D" 50mA

"AAA" 25mA

"9V" No Trickle Charge

Shutoff Mechanism: Delta V Detection and Timer Control

Delta V Detection 5mV per cell for "AA-AAA-C-D"

Max Timer Control 2 or 4 "AA" / 1 or 2 "AA-C-D" 3 hours

6 or 8 "AA" / 3 or 4 "AA-C-D" 6 hours

2 or 4 or 6 or 8 "AAA" 3 hours

Charger Input : DC 12V, 1A

AC Adapter Input: 100-240V AC 50/60Hz 0.35A

AC Adapter Output: DC 12V, 1A

Weight (charger): 335 grams (11.8 oz.)

Dimensions (mm): 200 x 100 x 54 (H x L x W)

Volume (cm³): 12525 (charger), 1248 (AC adapter)

Safety Features: Delta V Charging Cut Off

Short Circuit and Reverse Polarity Protection

Safety Timer to Prevent Over Charge

Bad Battery Detection

Important Notice

This datasheet contains information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc.

Contents herein do not constitute a warranty.

Energizer.