

## Cooper Bussmann

[Homepage](#)  
[About Cooper Bussmann](#)  
[Contact Us](#)  
[Privacy](#)  
[Legal](#)  
[Cooper Bussmann® Brand](#)  
[Site Map](#)



## FNQ-1-1/2

Time-Delay Supplementary Fuse, 500V, 1-1/2A, 13/32 - 1-1/2 Inches

### Product Information

Product Type:	Fuse
Product Family:	Electrical Power
Brand:	Cooper Bussmann

### Recommended Products

Rec. Fuse Block:	<a href="#">BM603 Series</a>
Rec. Inline Fuse Holder:	<a href="#">HEB Series</a>
Rec. Panel-mount Fuse Holder:	<a href="#">HPS Series</a>
Rec. Modular Fuse Holder:	<a href="#">CHM Series</a>
Rec. Fuse Clips:	<a href="#">5960 Series</a>
Rec. Cover:	<a href="#">SAMI-7 Series</a>

### Physical Properties

Dimensions:	1.5in.(L) × 0.41in.(W) × 0in.(H)
-------------	----------------------------------

### Certifications

[UL Listed](#)

[CSA Certified](#)

### Electrical Properties


Maximum AC Voltage:	500
Amperage Rating:	1.5
AC Interrupting Ratings:	<ul style="list-style-type: none"> <li>• 10000 at 500V</li> </ul>
Time Delay:	Yes

# Tron® Time-Delay Fuses

FNQ

## 13/32" x 1-1/2" Midget

500 Volt, 1/10-30 Amps



- Fibre tube.
- Nickel plated brass endcaps.
- For motor control transformers and other circuits with in-rush currents.

**Catalog Symbol:** FNQ (5AG)

TIME-DELAY

1/10 TO 30A

500Vac (OR LESS)

**Interrupting Rating:** 10,000A

UL LISTED, STD 248-14, (GUIDE # JDYX, FILE # E19180)

CSA CERTIFIED (CLASS 1422-01; FILE 53787)

### Catalog Symbol and Ampere Ratings


FNQ-1/10	FNQ-8/10	FNQ-3-2/10	FNQ-9
FNQ-1/8	FNQ-1	FNQ-3-1/2	FNQ-10
FNQ-15/100	FNQ-1-1/8	FNQ-4	FNQ-12
FNQ-3/16	FNQ-1-1/4	FNQ-4-1/2	FNQ-14
FNQ-2/10	FNQ-1-1/2	FNQ-5	FNQ-15
FNQ-1/4	FNQ-1-6/10	FNQ-5-6/10	FNQ-20
FNQ-3/10	FNQ-2	FNQ-6	FNQ-25
FNQ-4/10	FNQ-2-1/4	FNQ-6-1/4	FNQ-30
FNQ-1/2	FNQ-2-1/2	FNQ-7	—
FNQ-6/10	FNQ-3	FNQ-8	—

### Carton Quantity and Weight


Ampere Ratings	Carton Qty	Weight*	
		Lbs.	Kg.
1-30	10	.180	.082

\* Weight per carton.

### Time-Current Characteristic Curve—Average Melt

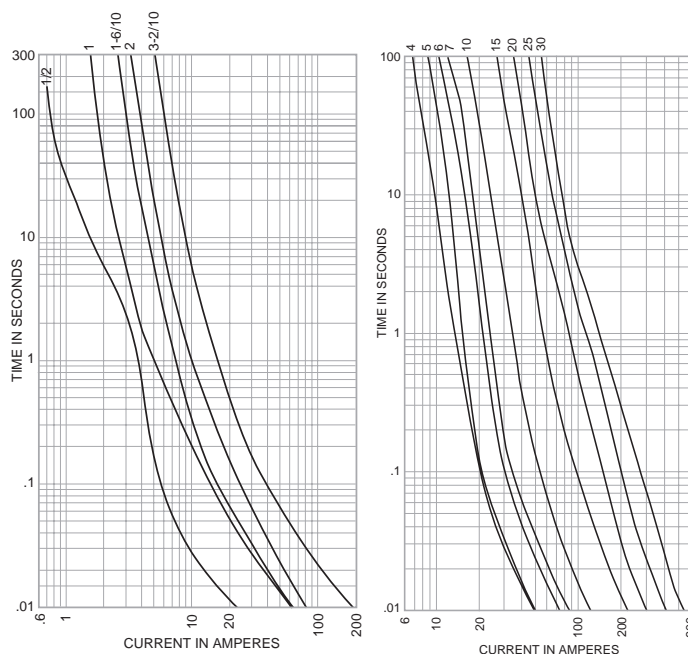

RMS SYMMETRICAL IN AMPERES



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses

See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

CE