

### Cooper Bussmann

- Homepage
- About Cooper Bussmann
- Contact Us
- Privacy
- Legal
- Cooper Bussmann® Brand
- Site Map



## FNM-7

Time-Delay Supplementary Fuses, 13/32 x 1-1/2 Inches

Product Information	
Product Type:	Fuse
Product Family:	Electrical Power
Upgrade Product:	<a href="#">LP-CC-7</a>
Brand:	Cooper Bussmann
Sub-brand:	Fusetron

Recommended Products	
Rec. Fuse Block:	<a href="#">BM603 Series</a>
Rec. Inline Fuse Holder:	<a href="#">HPS</a>
Rec. Panel-mount Fuse Holder:	<a href="#">HEB Series</a>
Rec. Modular Fuse Holder:	<a href="#">OPM-NG-SM3</a>
Rec. Fuse Clips:	<a href="#">5960 Series</a>
Rec. Cover:	<a href="#">SAMI-7 Series</a>

Physical Properties	
Dimensions:	1.5in.(L) × 0.41in.(W) × 0in.(H)


Certifications
<a href="#">UL Listed</a>
<a href="#">CSA Certified</a>

Electrical Properties	
Maximum AC Voltage:	250
Amperage Rating:	7
AC Interrupting Ratings:	<ul style="list-style-type: none"> <li>• 10000 at 125V</li> <li>• 200 at 250V</li> </ul>
Time Delay:	Yes


# Time-Delay Ferrule Fuse

FNM

13/32" x 1-1/2"

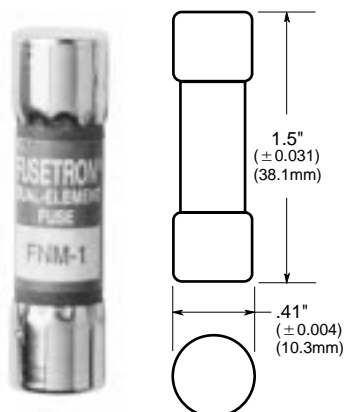

- Fibre tube.
- For circuits with high inrush currents.
- Formerly designated 5AB.
- Fusetron® Dual-Element fuse.



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses  
See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

**Catalog Symbol:** FNM

TIME-DELAY

1/10 TO 30A

**Interrupting Rating** - SEE CHART BELOW

**UL Listed:** STD. 248-14, 0-10/250Vac; 12-15/125Vac

FILE #E19180, GUIDE #JDYX

**CSA Certified:** 1-10/250Vac; CLASS 1422-01,

12-15/125Vac; FILE 53787

**Electrical Ratings (Catalog Symbol and Amperes)**

250Vac IR	250Vac IR	250Vac IR	125Vac
FNM-1/10	FNM-1-1/8	FNM-4	FNM-12 10,000
FNM-1/8	FNM-1-1/4	FNM-4-1/2	FNM-15 @ 125Vac
FNM-15/100	FNM-1-4/10	FNM-5	-
FNM-2/10	FNM-1-1/2	FNM-5-6/10	-
FNM-1/4 35A @	FNM-1-6/10 100A @	FNM-6	<b>32Vac</b>
FNM-3/10 250Vac	FNM-1-8/10 250Vac	FNM-6-1/4 200A @	FNM-20 250Vac
FNM-4/10 10,000	FNM-2 10,000	FNM-7 10,000 @	FNM-25 125Vac
FNM-1/2 @	FNM-2-1/4 @	FNM-8 @	FNM-30
FNM-6/10 125Vac	FNM-2-1/2 125Vac	FNM-9	-
FNM-3/4	FNM-2-8/10	FNM-10	-
FNM-8/10	FNM-3	-	-
FNM-1	FNM-3-2/10	-	-
-	FNM-3-1/2	-	-

If 250Vac is needed for 12-30A, use FNW series.

**Carton Quantity and Weight**

Ampere Ratings	Carton Qty	Weight	
		Lbs.	Kg.
0-30	10	.125	.057

CE