


Universal Phase Monitor

DIMENSIONS (INCHES)

\\\ORDERING INFORMATION			
MODEL NUMBER	DESCRIPTION		
SLU-100-ASA	Universal Phase Monitor		
SLU-100-ASD	Din Rail Mount Universal Phase Monitor		

TOP LABELS

c UL US (

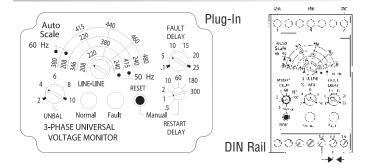

DIMENSIO	145 (IIVCIILS)	
3.00'	2.38'	ØA ØB ØC 03 4 5 60 02 0 70
	2.95	1.77 =
DIN Rail		

Phase Monitor Relays (3-Phase Monitors) provide cost-effective protection against premature equipment failure caused by voltage faults on 3-Phase systems (Wye or Delta). The SLU Series multi-mode phase monitoring relay, was designed for the convenience of electrician's, maintenance managers and engineers. A single SLU Phase Monitoring Relay can be easily adjusted for the *voltage*, *imbalance percentage* and time delay requirements to protect against *unbalanced voltages* or *single phasing* regardless of any regenerative voltages.

Both **Delta** and **Wye** systems may be monitored. In Wye systems, connections to neutral are NOT required.

NOTE: Not recommended for generator or variable frequency drive applications. Call technical support for application assistance.

SPECIF	ICATIONS				
	Frequency	Nominal Line-to- Line Voltages	Adjustable Range		
AUTO RANGING SCALES		208, 220, 240	200-250		
	60Hz	380, 415, 440, 460, 480	360-500		
	50Hz	208, 220, 240	200-250		
	30112	346, 380, 415	330-430		
VOLTAGE BAND	Drop-out ±10% of Range Setting (Under/Over)				
	Pick-up	±7% of Range Setting (Under/Over)			
MAXIMUM VOLTAGE	550 VAC (Line-to-Line)				
PHASE SEQUENCE	ABC (Will Not Operate On CBA Sequence)				
POWER REQUIRED	90VA Max.				
PHASE	2% to 10%, Adju				
UNBALANCE	Hysteresis	10% of Setting			
PHASE SHIFT	1 '	^{2°} Pick-up (Ø-Loss))		
EDECI IENICV	50/60 Hz				
FREQUENCY SHIFT	Drop-out	± 4%			
	Pick up	± 3%			
RESET	Automatic or Manual Mode				
RELAY	SPDT, 10A @ 240VAC Resistive, 1/2 HP @240VAC				
OUTPUT	Resistive, 1/2 HP	@240VAC			
	Resistive, 1/2 HP	@240VAC Flashing	Continuous		
	Resistive, 1/2 HP Normal (Green LED)	@240VAC Flashing Fault Delay Active	Continuous Relay Energized		
OUTPUT	Normal (Green LED) Fault (Red LED)	@240VAC Flashing Fault Delay	Relay		
OUTPUT	Normal (Green LED) Fault (Red LED) Power Up	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum	Relay Energized Relay De-energized		
OUTPUT INDICATORS	Normal (Green LED) Fault (Red LED)	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju	Relay Energized Relay De-energized		
OUTPUT	Normal (Green LED) Fault (Red LED) Power Up	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Loor Phase Reversa	Relay Energized Relay De-energized stable oss, Unbalance		
OUTPUT INDICATORS RESPONSE	Normal (Green LED) Fault (Red LED) Power Up Fault Delay	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Loor Phase Reversa 0.5 to 300 S, Adj (Auto Reset)	Relay Energized Relay De-energized stable oss, Unbalance l) justable		
OUTPUT INDICATORS RESPONSE TIMES TEMPERATURE	Normal (Green LED) Fault (Red LED) Power Up Fault Delay Severe Fault	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Loor Phase Reversa 0.5 to 300 S, Adi	Relay Energized Relay De-energized stable oss, Unbalance l) justable		
OUTPUT INDICATORS RESPONSE TIMES	Normal (Green LED) Fault (Red LED) Power Up Fault Delay Severe Fault Restart	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Lo or Phase Reversa 0.5 to 300 S, Adj (Auto Reset) 32° to 131°F (0°	Relay Energized Relay De-energized istable oss, Unbalance i) justable to +55°C)		
OUTPUT INDICATORS RESPONSE TIMES TEMPERATURE	Resistive, 1/2 HP Normal (Green LED) Fault (Red LED) Power Up Fault Delay Severe Fault Restart Operate	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Loor Phase Reversa 0.5 to 300 S, Adj (Auto Reset) 32° to 131°F (0° -49° to 185°F (-4	Relay Energized Relay De-energized istable oss, Unbalance i) justable to +55°C)		
OUTPUT INDICATORS RESPONSE TIMES TEMPERATURE RATINGS REPEAT	Resistive, 1/2 HP Normal (Green LED) Fault (Red LED) Power Up Fault Delay Severe Fault Restart Operate Storage 1% @ Fixed Con Slotted Screw Te	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Loor Phase Reversa 0.5 to 300 S, Adj (Auto Reset) 32° to 131°F (0° -49° to 185°F (-4	Relay Energized Relay De-energized Istable Doss, Unbalance I) Justable to +55°C) So to +85°C)		
RESPONSE TIMES TEMPERATURE RATINGS REPEAT ACCURACY TERMINALS (DIN)	Resistive, 1/2 HP Normal (Green LED) Fault (Red LED) Power Up Fault Delay Severe Fault Restart Operate Storage 1% @ Fixed Con	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Loor Phase Reversa 0.5 to 300 S, Adj (Auto Reset) 32° to 131°F (0° -49° to 185°F (-4) dition	Relay Energized Relay De-energized Istable oss, Unbalance l) justable to +55°C) -5° to +85°C)		
OUTPUT INDICATORS RESPONSE TIMES TEMPERATURE RATINGS REPEAT ACCURACY TERMINALS	Resistive, 1/2 HP Normal (Green LED) Fault (Red LED) Power Up Fault Delay Severe Fault Restart Operate Storage 1% @ Fixed Con Slotted Screw Te	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Lo or Phase Reversa 0.5 to 300 S, Adj (Auto Reset) 32° to 131°F (0° -49° to 185°F (-4) dition	Relay Energized Relay De-energized Istable oss, Unbalance I) justable to +55°C) -5° to +85°C) 2AWG Max. ver 14 Term		
RESPONSE TIMES TEMPERATURE RATINGS REPEAT ACCURACY TERMINALS (DIN)	Resistive, 1/2 HP Normal (Green LED) Fault (Red LED) Power Up Fault Delay Severe Fault Restart Operate Storage 1% @ Fixed Con Slotted Screw Te	@240VAC Flashing Fault Delay Active Restart Delay Active 2.5 S Minimum 0.1 to 25 S, Adju 100mS (Phase-Lo or Phase Reversa 0.5 to 300 S, Adj (Auto Reset) 32° to 131°F (0° -49° to 185°F (-4dition rminal Clamps, 12 LEXAN® Dust Cor 35mm DIN Rail,	Relay Energized Relay De-energized Istable oss, Unbalance I) justable to +55°C) -5° to +85°C) 2AWG Max. ver 14 Term		