

OPERATION

The **ISO Series single channel** devices are used to provide a safe and reliable means of controlling loads from hazardous locations without releasing sufficient energy, under normal or abnormal conditions, to cause ignition of a flammable or combustible atmospheric mixture while in its most easily ignited concentration. An isolated output turns on when the control switch input from the hazardous location is closed. When the control switch input opens, the isolated output turns off. The Style A single channel plug-in devices come equipped with integral spring mating clips and socket (PF083A) which secure the device to make this unit the only UL913 Intrinsically Safe plug-in associated apparatus available on the market today. The Style N, surface mounted enclosure is sealed with a high quality epoxy resin material and has five (5) #8-32 screw terminals.




Process Control Equipment
for Hazardous Locations
7M26
UL913



Single Channel Isolated Switch

DIMENSIONS (INCHES)

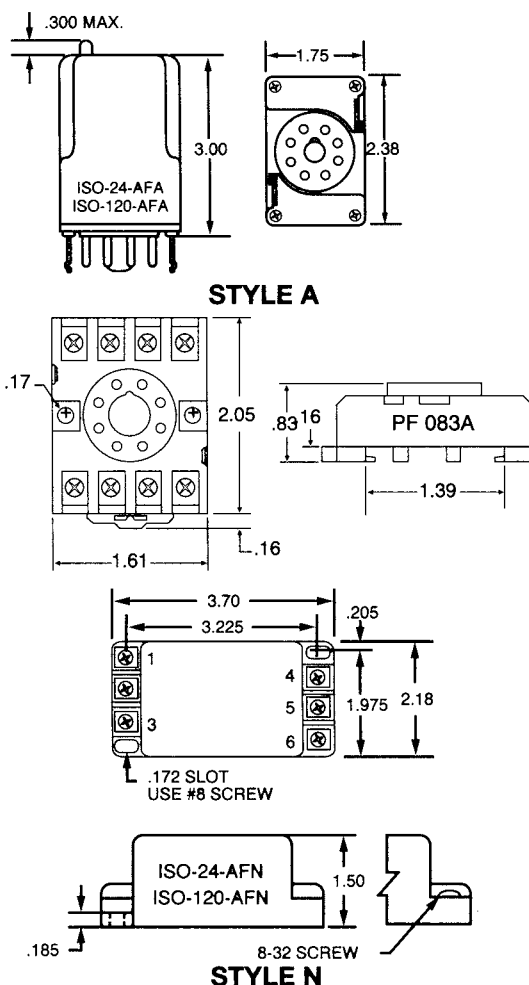

SPECIFICATIONS

CONTROL VOLTAGE	24 or 120 VAC $\pm 10\%$, 50/60 Hz
CONTROL SWITCH	Open Circuit Voltage 16 VDC Open Circuit Voltage 200 μ Amps
RESPONSE	Operate 6 mSEC (Approx.) Release 2.5 mSEC (Approx.)
POWER REQUIRED	1.5 VA
DUTY CYCLE	Continuous
CONTACT RATING	SPST-N.O., 5 amps @ 24 or 120 VAC, Resistive; 278 VA, Inductive
SENSITIVITY	100 k ohm
ISOLATION	2500 Volts, Input to Output
LIFE EXPECTANCY	Mechanical 20 Million Operations Electrical 50,000 Operations @ Rated Load
INDICATORS	On When Output is On
TEMPERATURE RATING	Operate -4° to 131° F (-20° to $+55^{\circ}$ C) Storage -40° to 185° F (-40° to $+85^{\circ}$ C)
ENCLOSURE	Style "A" and "N"
TERMINATIONS	(12) #8-32 Screw terminals
WEIGHT	20 oz.

ORDERING INFORMATION

MODEL NUMBER	CONTROL VOLTAGE	ENCLOSURE STYLE
ISO-24-AFA	24 VAC	A
ISO-120-AFA	120 VAC	A
ISO-24-AFN	24 VAC	N
ISO-120-AFN	120 VAC	N

Style "A" Socket Included (PF083A) with clips