119414-00



AMETEK

LAMB ELECTRIC




DESCRIPTION

- Two stage
- 120 volts
- 5.7"/145 mm diameter
- Double ball bearings
- Single speed
- Peripheral bypass discharge
- Thermoset fan end bracket
- Thermoset commutator bracket

DESIGN APPLICATION

- Equipment operating in environments requiring separation of working air from motor ventilating air

- Designed to handle clean, dry, filtered air only

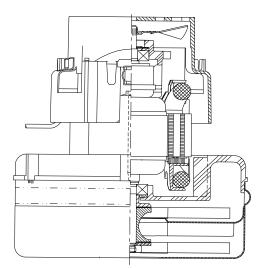

SPECIAL FEATURES

Model:

- Suitable for 120 volt AC operation, 50/60 Hz

- UL recognized, category PRGY2 (E47185)

- Provision for grounding
- Skeleton-frame design

- The Lamb Electric vacuum motor line offers a wide range of performance levels to meet design needs

Model 119414-00 is the G2K replacement for models 116336-00 and 116336-01

PICAI	_ M(OTOF	R PE	RFC	RM	ANC	E.*				(At ´	120 v	/olts	, 60Hz,	tes	st data is	corrected	l to stand	ard condi	tions of 29	.92 Hg, 6	8° F.)
															1	Orifice	Amps	Watts	RPM	Vac	Flow	Air
90) ⊥_∎					, l	/ac				2	\rightarrow	→	100		(Inches)		(In)		(In.H2O)	(CFM)	Watts
80)					~	low		0	~	<u> </u>		-	- 90		2.000	7.9	899	17800	3.1	94.0	34
70)	-	┝┓					0					-	80		1.750	7.9	903	17815	5.3	94.0	59
8 60	, <u> </u>												-	70		1.500	7.9	905	17750	9.4	91.0	100
S T						L,							-	60 🥿		1.250	8.0	916	17675	16.7	85.0	167
ਚੂ 50 														- 50 - 50 40 40		1.125	8.0	916	17650	22.6	80.0	212
)				ø	[-	- 40 4		1.000	8.0	913	17650	29.3	72.0	248
⁸ 30) 				<u> </u>				_					- 30 - 30		0.875	7.9	899	17850	37.4	62.0	274
20	, <u> </u>			X												0.750	7.6	869	18225	45.8	50.0	273
			1 ar										-	- 20		0.625	7.2	827	18800	53.3	38.0	238
10) to													- 10		0.500	6.8	780	19575	59.8	25.0	181
0) + -		+	+		<u> </u>		<u> </u>		<u> </u>	-	+	<u> </u>	- 0		0.375	6.2	721	20450	66.9	15.0	120
	0.000	0.250	0.375	0.500	0.625	0.750	0.875	1.000	1.125	1.250	1.500	1.750	2.000			0.250	5.7	667	21550	74.2	7.0	62
	0		0	0		rifice Di					`	`				0.000	5.4	620	22450	84.3	0.0	0
25	00 T			1			-8-+						•	_ 50	,] [Orifice	Amps	Watts	RPM	Vac	Flow	Air
						-		Vac				~	~	- 45		(mm)		(In)		(mm H2O)	(L/Sec)	Wat
20	00 +			L –	_			Flow		1	<u>م</u>			- 40		48.0	7.9	901	17807	103	44.4	45
									~	$\langle \rangle$				- 35		40.0	7.9	904	17770	208	43.4	88
⁰² ±15	00 +					►			\swarrow					- 30 ឆ្ល		30.0	8.0	916	17661	507	38.8	192
02H WW -⊥								≫≺						- 30 30 - 25		23.0	7.9	903	17800	899	30.4	268
Vacuum-	00 +						~							- 20		19.0	7.6	868	18237	1167	23.5	272
<ac< td=""><td></td><td></td><td></td><td> </td><td></td><td>\checkmark</td><td></td><td></td><td></td><td>X</td><td></td><td></td><td></td><td>-~ i</td><td></td><td>16.0</td><td>72</td><td>829</td><td>18777</td><td>1346</td><td>18.2</td><td>239</td></ac<>						\checkmark				X				-~ i		16.0	72	829	18777	1346	18.2	239

15

10

5

0

* Data represents performance of a typical motor sampled from a large production quantity. Individual motor data may vary due to normal manufacturing variations.

ORIFICE:

48.0

80.0"

30.0 40.0

Orifice Diameter--mm

16.0

13.0

10.0

6.5

0.0

7/8

7.2

6.8

6.3

5.7

54

Minimum Vacuum:

829

785

730

670

620

18777

19498

20319

21495

22450

33.0"

Note: Metric performance data is calculated from the ASTM data above.

1502

1672

1875

2141

Maximum Watts:

500

0

0.0 6.5 10.0 13.0 16.0 19.0 23.0

D

Α

т

Α

18.2

12.4

7.8

35

0.0


187

129

65

0

1050

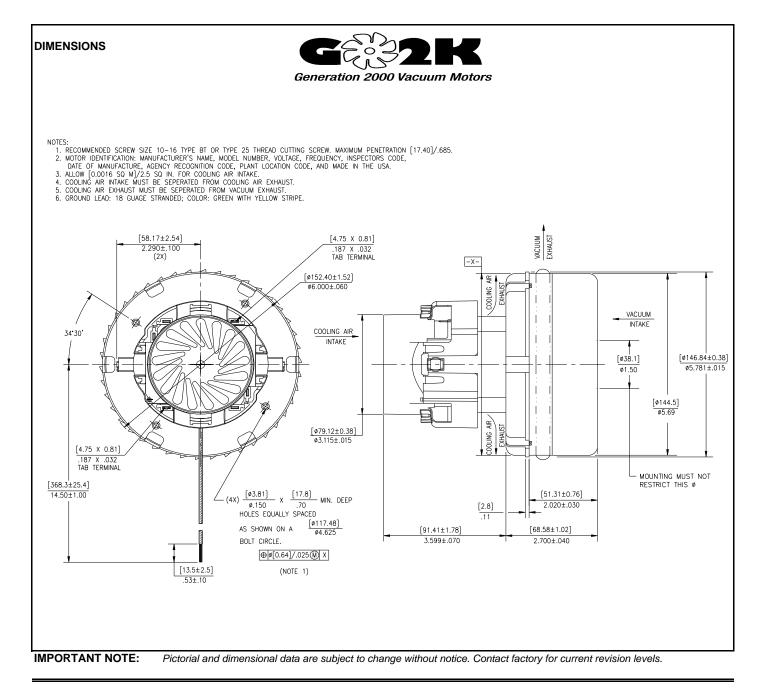

WARNING - When using AMETEK Lamb Electric bypass motors in machines that come in contact with foam, liquid (including water), or other foreign substances, the machine must be designed and constructed to prevent those substances from reaching the fan system, motor housing, and electrical components. Lamb Electric vacuum motors other than hazardous duty models should not be applied in machines that come in contact with dry chemicals or other volatile materials. Failure to observe these precautions could cause flashing (depending on volatility) or electrical shock which could result in property damage and severe bodily injury, including death in extreme cases. All applications incorporating Lamb Electric motors should be submitted to appropriate organizations or agencies for testing specifically related to the safety of your equipment.

AMETEK/Lamb Electric Division 627 Lake Street Kent, Ohio 44240 U.S.A. Tel: (330) 673-3451 Fax: (330) 673-8994 Ametek GmbH P. O. Box 1251 D-71667 Marbach Germany Phone: + 49-714-484-9512 Fax: + 49-714-484-9513 AMETEK/Singapore Private Limited 10 Ang Mo Kio Street 65 # 05-12 Techpoint Singapore 2056 Tel: + 65-484-2388 Fax: + 65-481-6588

Issued: March, 2000