


BES 516-369-G-SA2-PU-08
BES0375



IND. CONT. EQ
81U2
US for use in the secondary of
a class 2 source of supply
Environmental - Type 1 Enclosure

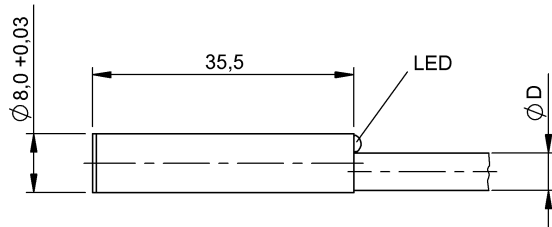

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Cable diameter D	4.60 mm
Cable length	8 m
Conductor cross-section	0.34 mm ²
Connection type	Cable, 8.00 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Hysteresis H max. (% of Sr)	15.0 %
Load capacitance max. at Ue	1 µF
No-load current I _o max., undamped	12 mA
Operating voltage U _b	10...30 VDC
Output resistance R _a	2.2 kOhm + D + LED
Pollution degree	3
Protected against miswiring	yes
Rated insulation voltage U _i	75 V DC
Rated operating current I _e DC	130 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	10 ms
Repeat accuracy max. (% of Sr)	5.0 %
Residual current I _r max.	80 µA
Switching frequency	800 Hz
Utilization category	DC -13
Voltage drop static max.	3.5 V

Environmental conditions

Ambient temperature	-25...70 °C
Protection type IEC 60529	IP67

General data

Approval/Conformity	CE cULus EAC
Basic standard	IEC 60947-5-2

Material

Housing material	Stainless steel
Material jacket	PUR
Material sensing surface	PBT

Mechanical data

Dimension	Ø 8 x 35.5 mm
Installation	for flush mounting
Size	D8.0

Output/Interface

Switching output	PNP Normally open (NO)
------------------	------------------------

Range/Distance

Assured operating distance S _a	1.6 mm
Range	2 mm
Rated operating distance S _n	2 mm
Ripple max. (% of U _e)	15 %
Switching distance marking	■ ■
Temperature drift max. (% of S _r)	10 %

BES 516-369-G-SA2-PU-08
BES0375

Remarks

Shielded: See installation instructions for inductive sensors with extended range 825357.
The sensor is functional again after the overload has been eliminated.

Wiring Diagram

