


BNI CCL-502-100-Z001
BNI0040

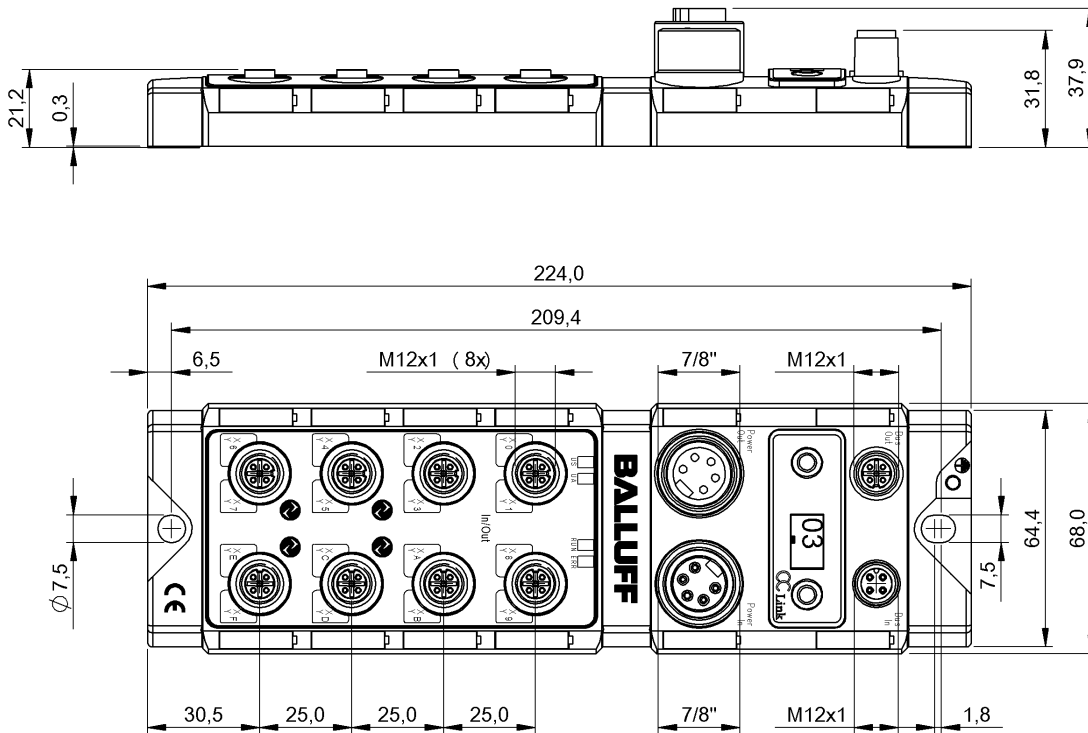

Display/Operation

Actuator supply UA, indicator	LED green
Sensor supply US indicator	LED green
Switching function display	LED yellow

Electrical connection

Contact, surface protection	nickel plated 2 µm/gold plated 0.4 µm
-----------------------------	---------------------------------------

Electrical data

Address range	1 - 64
Configurable inputs/outputs	yes
Current sum UA, actuator	9.0 A
Current sum US, sensor	9.0 A
MTTF (40 °C)	51 a
Occupied stations	4
Operating voltage Ub	18...30.2 VDC
Output current max.	2 A
Rated operating voltage Ue DC	24 V
Transfer rate	156...10 Mbit/s

Environmental conditions

Ambient temperature	-5...55 °C
EN 60068-2-6, Vibration	5...61 Hz, constant amplitude 1 mm 61...500 Hz, constant acceleration 15 g
Protection type IEC 60529	IP67 when threaded in
Storage temperature	-25...70 °C

Functional safety

Diagnostic coverage	0 %
Functional safety	no
Mission Time	20 a

General data

Approval/Conformity	CLPA CE UL 94
Scope of delivery	Part label (20x) Blind plugs M12 (4x) Ground strap Lock washer Short guide M4x6 screw
Style	Two-row

BNI CCL-502-100-Z001 BNI0040

Material

Gasket, material	FKM 75
Housing material	Zinc, Die casting
Housing shield	yes
Surface protection	Cu 15 µ Ni 15 µ

Mechanical data

Dimension	68 x 37.9 x 224 mm
Fastening detail	2-hole screw mount
Mounting ground strap	M4

Output/Interface


Auxiliary interfaces	4x IO-Link
Auxiliary interfaces, number	4x IO-Link
Digital inputs	16x PNP, Type 2
Digital outputs	16x PNP
Interface	CC-Link CC-Link V1.1

Remarks


Installation instructions See short guide
For further information on MTTF/B10d, please refer to the MTTF / B10d Certificate.

Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.


Connector view




PIN 1: GND PIN 2: GND PIN 3: Function ground PIN 4: Sensor and bus supply. PIN 5: Actuator supply Power IN




PIN 1: GND PIN 2: GND PIN 3: Function ground PIN 4: Sensor and bus supply. PIN 5: Actuator supply Power Out




Bus in PIN 1: SLD PIN 2: DB PIN 3: DG PIN 4: DA



Bus out PIN 1: SLD PIN 2: DB PIN 3: DG PIN 4: DA



I/O ports PIN 1: +24V, 0.2A PIN 2: In-/output 1.6A PIN 3: GND PIN 4: In-/output 1.6A PIN 5: Function ground



IO-Link PIN 1: +24V, 1.6A PIN 2: In-/output/Diagnostics PIN 3: 0V PIN 4: IO-Link/In-/output PIN 5: n.c.