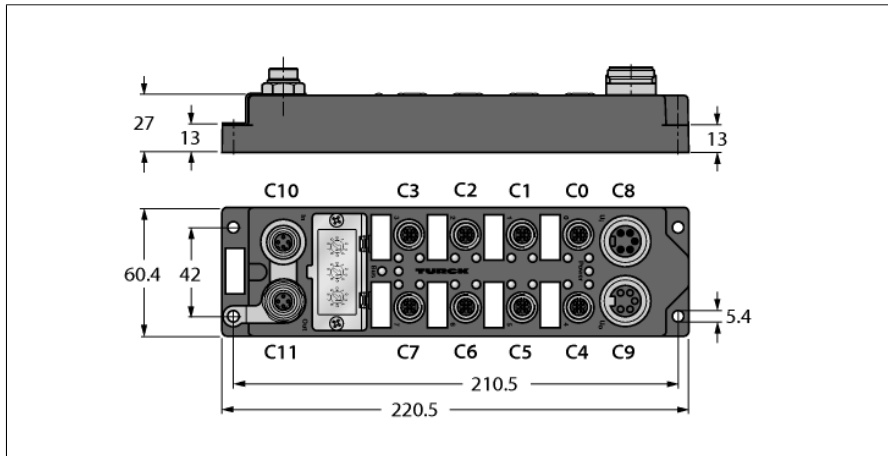


# Compact multiprotocol I/O module for Ethernet

## 16 configurable digital channels

### pnp inputs / outputs 2 A

#### FGEN-XSG16-5001



- Input diagnostics per port
- Output diagnostics per channel
- Two freely selectable digital signals per port
- 7/8", 5-pin, for power supply
- Fibre-glass reinforced PA6 housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connectors
- Degree of protection IP67

<b>Type</b>	FGEN-XSG16-5001
<b>ID</b>	6825421
<b>Number of channels</b>	16
Operating / load voltage	18...30 VDC
Operating current	< 200 mA
Electrical isolation	Unlike other FGEN modules, the FGEN-XSG has a common reference potential for operating and load voltage, because the I/O points are freely selectable.
Voltage supply connection	2 x 7/8"
<b>Inputs</b>	
Number of channels	(16) 3-wire pnp sensors
Input voltage	18...30 VDC from operating voltage UB
Supply current	120 mA per port, short-circuit proof
Switching threshold	EN 61131-3
	low max.: 1.5 mA / high min.: 2 mA
Input delay	2.5 ms
Max. input current	7 mA
Electrical isolation	galvanically separated against the bus
<b>Outputs</b>	
Number of channels	(16) DC actuators
Output voltage	18...30 VDC from load voltage
Output current per channel	2.0 A, short-circuit proof
Load type	resistive, inductive, lamp load
Simultaneity factor	0.25 for entire module
	1* 2A or 2* 1A per port
	total current max. 9 A per module
Electrical isolation	galvanically separated against the bus
<b>System data</b>	
Transmission rate	10/100 Mbps; Full/Half Duplex; Auto Negotiation; Auto Crossing
Connection technology Ethernet	2 x M12 x 1 female connector, 4-pin, D-coded
Protocol detection	automatic
Web server	from FW 3.1.0.0
Service interface	Ethernet
<b>Modbus TCP</b>	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	8

# Compact multiprotocol I/O module for Ethernet

## 16 configurable digital channels

### pnp inputs / outputs 2 A

### FGEN-XSG16-5001

---

#### Ethernet/IP

Addressing	acc. to EtherNet/IP specification
Quick Connect (QC)	< 150 ms
Device Level Ring (DLR)	supported
Class 3 connections (TCP)	3
Class 1 connections (CIP)	10

---

#### PROFINET

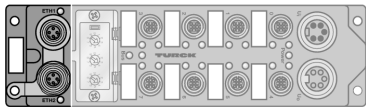


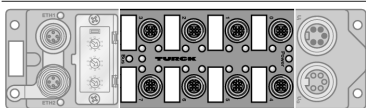
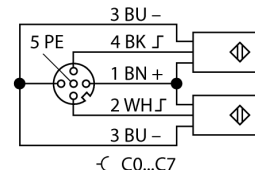
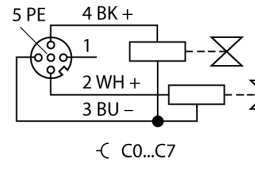
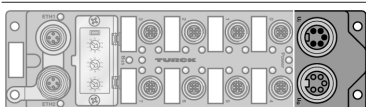


Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 150 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported

---

#### Dimensions (W x L x H)

Housing material	60 x 220.5 x 27 mm
Halogen-free	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	yes
Ambient temperature	4 mounting holes Ø 5,4 mm
Storage temperature	0...+55 °C
Altitude	-25...+70 °C
Vibration test	Max. 5000 m
Shock test	Acc. to EN 60068-2-6
Electromagnetic compatibility	acc. to EN 60068-2-27
Protection class	Acc. to EN 61131-2
MTTF	IP67
Approvals	149 years acc. to SN 29500 (Ed. 99) 20 °C
UL Certificate	CE, cULus
	pol. deg.2, env. temp. max. 40 °C, cl.2 ps req.

**Compact multiprotocol I/O module for Ethernet**  
**16 configurable digital channels**  
**pnp inputs / outputs 2 A**  
**FGEN-XSG16-5001**

	<p><b>Accessories</b> Ethernet cable (example): RSSD RSSD 441-2M Ident-No. U-02482</p>	<p>M12 x 1 Ethernet</p> <p>   C10         </p> <p>   C11         </p>
	<p><b>Accessories</b> FGEN-XSG modules with freely selectable I/O functions (input/output). Power and load supply with common reference potential. Not recommended for applications with safety shutdown <math>V_0</math>. However, the use of other FGEN modules is permitted. Accessories: Connection cable for dual channels (example): RK 4.4T-2-RS 4.4T Ident-No. U2445 Splitter for single channels (example): YB2-FSM 4.5-2FKM 4.5 Ident-No. U0875-78</p>	<p>M12 x 1 Input</p>  <p>  </p>
	<p><b>Accessories</b> Power supply cable (example): RSM RKM 50-2M Ident-No. U2282-0</p>	<p>7/8" Power Supply</p> <p>   C8         </p> <p>   C9         </p>

**Compact multiprotocol I/O module for Ethernet**  
**16 configurable digital channels**  
**pnp inputs / outputs 2 A**  
**FGEN-XSG16-5001**

**LED status module**

LED	Color	Status	Description
ETH1 / ETH2	green	on	Ethernet Link (100 Mbps)
		flashing	Ethernet communication (100 Mbps)
	yellow	on	Ethernet Link (10 Mbps)
		flashing	Ethernet communication (10 Mbps)
		off	no Ethernet link
Bus	green	on	Active connection to a master
		flashing	ready
	red	on	IP address conflict or Restore Mode
		flashing	Blink/Wink command active
Power	green	on	Operating voltage $U_s$ and load voltage $U_L$ within the defined tolerances
		red	Load voltage $U_L$ below the defined tolerances
	off	Operating voltage $U_s$ below the defined tolerances	

**LED status IOs**

LED	Color	Status	Description
C0.I1 ... C7.I16 resp. C0.O1 ... C7.O16	green	on	Input resp. output active
	red	on	Overload of sensor supply at the corresponding connector resp. output active with overload / short circuit
		off	Input resp. output inactive

# Compact multiprotocol I/O module for Ethernet

## 16 configurable digital channels

### pnp inputs / outputs 2 A

### FGEN-XSG16-5001

#### Process data mapping of single protocols

#### Modbus TCP Register-Mapping

	Reg	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs (RO)	0x0000	DI15 C7P2	DI14 C7P4	DI13 C6P2	DI12 C6P4	DI11 C5P2	DI10 C5P4	DI9 C4P2	DI8 C4P4	DI7 C3P2	DI6 C3P4	DI5 C2P2	DI4 C2P4	DI3 C1P2	DI2 C1P4	DI1 C0P2	DI0 C0P4
Status (RO)	0x0001	-	FCE	-	-	CFG	COM	UB	-	UL	-	-	-	-	-	-	Diag Warn
Diag (RO)	0x0002	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	I/O Diag
Outputs (RW)	0x0800	DO15 C7P2	DO14 C7P4	DO13 C6P2	DO12 C6P4	DO11 C5P2	DO10 C5P4	DO9 C4P2	DO8 C4P4	DO7 C3P2	DO6 C3P4	DO5 C2P2	DO4 C2P4	DO3 C1P2	DO2 C1P4	DO1 C0P2	DO0 C0P4
I/O Diag (RO)	0xA000	SCO7	SCO6	SCO5	SCO4	SCO3	SCO2	SCO1	SCO0	SCS7	SCS6	SCS5	SCS4	SCS3	SCS2	SCS1	SCS0
I/O Diag (RO)	0xA001	-	-	-	-	-	-	-	-	SCO15	SCO14	SCO13	SCO12	SCO11	SCO10	SCO9	SCO8

#### EtherNet/IP™ data mapping with activated Scheduled Diagnostics

	Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input data (Station -> Scanner)																	
GW Status	1	-	FCE	-	-	CFG	COM	UB	-	UL	-	-	-	-	-	-	Diag Warn
Inputs	2	DI15 C7P2	DI14 C7P4	DI13 C6P2	DI12 C6P4	DI11 C5P2	DI10 C5P4	DI9 C4P2	DI8 C4P4	DI7 C3P2	DI6 C3P4	DI5 C2P2	DI4 C2P4	DI3 C1P2	DI2 C1P4	DI1 C0P2	DI0 C0P4
Diag 1	3	-	-	Sched Diag	-	-	-	-	-	-	-	-	-	-	-	-	I/O Diag
Diag 2	4	SCO7	SCO6	SCO5	SCO4	SCO3	SCO2	SCO1	SCO0	SCS7	SCS6	SCS5	SCS4	SCS3	SCS2	SCS1	SCS0
Diag 3	5	-	-	-	-	-	-	-	-	SCO15	SCO14	SCO13	SCO12	SCO11	SCO10	SCO9	SCO8
Output (Scanner -> Station)																	
Control	1	reserved															
Outputs	2	DO15 C7P2	DO14 C7P4	DO13 C6P2	DO12 C6P4	DO11 C5P2	DO10 C5P4	DO9 C4P2	DO8 C4P4	DO7 C3P2	DO6 C3P4	DO5 C2P2	DO4 C2P4	DO3 C1P2	DO2 C1P4	DO1 C0P2	DO0 C0P4

#### EtherNet/IP™ data mapping with activated Summarized Diagnostics

	Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input data (Station -> Scanner)																	
GW Status	1	-	FCE	-	-	CFG	COM	UB	-	UL	-	-	-	-	-	-	Diag Warn
Inputs	2	DI15 C7P2	DI14 C7P4	DI13 C6P2	DI12 C6P4	DI11 C5P2	DI10 C5P4	DI9 C4P2	DI8 C4P4	DI7 C3P2	DI6 C3P4	DI5 C2P2	DI4 C2P4	DI3 C1P2	DI2 C1P4	DI1 C0P2	DI0 C0P4
Diag 1	3																I/O Diag
Output (Scanner -> Station)																	
Control	1	reserved															
Outputs	2	DO15 C7P2	DO14 C7P4	DO13 C6P2	DO12 C6P4	DO11 C5P2	DO10 C5P4	DO9 C4P2	DO8 C4P4	DO7 C3P2	DO6 C3P4	DO5 C2P2	DO4 C2P4	DO3 C1P2	DO2 C1P4	DO1 C0P2	DO0 C0P4

#### PROFINET Process Data

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs	0	DI7 C3P2	DI6 C3P4	DI5 C2P2	DI4 C2P4	DI3 C1P2	DI2 C1P4	DI1 C0P2	DI0 C0P4
	1	DI15 C7P2	DI14 C7P4	DI13 C6P2	DI12 C6P4	DI11 C5P2	DI10 C5P4	DI9 C4P2	DI8 C4P4
Outputs	0	DO7 C3P2	DO6 C3P4	DO5 C2P2	DO4 C2P4	DO3 C1P2	DO2 C1P4	DO1 C0P2	DO0 C0P4
	1	DO15	DO14	DO13	DO12	DO11	DO10	DO9	DO8

**Compact multiprotocol I/O module for Ethernet**  
**16 configurable digital channels**  
**pnp inputs / outputs 2 A**  
**FGEN-XSG16-5001**

Legend:

DI	Digital input	COM	Communication error on internal module bus
DO	Digital output	CFG	I/O configuration error
Cx	female	FCE	I/O-ASSISTANT Force Mode active
Px	Pin	I/ODiag	I/O diagnostics available
DiagWarn	Diagnostic at least on 1 channel	SchedDiag	Manufacturer-specific diagnostics configured and active
UL	Undervoltage UL	SCSx	Short-circuit on sensor supply at female x
UB	Undervoltage UB	SCOx	Short-circuit output x