

## quantumdata<sup>™</sup> 780C Multi-Interface Interoperability Tester Test HDMI, HDBaseT & 3G-SDI with one instrument



## **Key Features**

- HDMI, HDBaseT and 3G-SDI input and output ports for testing both source display devices as well as cables and distribution networks
- Test Ultra High Definition video products supporting 4K resolutions up to 300 MHz
- Video pattern and format library with programmable settings
- Protocol tests for digital video sources and displays
- Protocol logging application auxiliary channel analyzer (ACA) enables real time monitoring of EDID exchanges, HDCP transactions, SCDC transactions and CEC messages
- Passive protocol logging between a source and a sink is also optionally supported on HDMI ports
- NEW! Report File Creation feature provides HTML formatted report of tests performed

The Teledyne LeCroy quantumdata 780C Multi-Interface Interoperability Tester is a portable, handheld digital video generator and analyzer that enables you to run tests on various digital video devices and network distribution devices on site or in the R&D lab. The 780C is equipped with multiple interface types including HDMI and HDBaseT at 300 MHz pixel rate, 3G-SDI up to 2.97 Gb/s bit rate as well as component analog. Testing digital interfaces is supported by both an output port and an input port to allow testing of digital video sources, displays, audio devices and distribution devices.

#### **Diagnose and Troubleshoot**

The 780C provide an at-a-glance status bar on the bottom of the 7" inch touch screen. The instrument can run guick video audio and protocol tests on individual sources, displays, repeaters, distribution gear as well as cables. Protocol tests include tests for EDID, HDCP, infoFrames as well as timing data. The 780C can also be used for diagnosing installed digital video networks. You can place the 780C at any point in a video distribution network and run tests upstream toward the source while emulating a display (or sink). Or you can run tests downstream while emulating a source. Generate reports to demonstrate test series completion.

## Ease of Use

The 780C's large color touch screen provides ease of use and quick status information. The rich set of routine tests and diagnostic tests are accessible with just a few touch clicks. You can quickly configure settings on the outputs. A rich command set, available either through USB or RS-232 serial ports, supports automated testing.



# **SOURCE & NETWORK DIAGNOSTIC TEST FEATURES**

## **View Incoming Video & Data**

The 780C status bar provides essential information about the incoming video. The Video Display Test shows the incoming video and essential video and audio metadata. Both provide quick time to insight when conducting routine tests or diagnosing interoperability problems.

## **Test Response to EDIDs**

Many interoperability problems are related to EDIDs. 780C enables you to emulate any EDID to test a source's response. You can use commercial EDIDs or test EDIDs with specific video and audio support. Test with EDIDs with known anomalies or grab an EDID from a UHD TV for future testing.

## **View Auxiliary Channel Transactions**

Complex interoperability problems require visibility into the auxiliary channel. You can monitor HDMI and HDBaseT Display Data Channel data to view EDID, HDCP, SCDC and CEC transactions. You can check details of each transaction in the log and distribute the logs to colleagues and subject matter experts.



#### **Example Source Test Setup**

## Verify Cable / Network (Loop)

The 780C enables you to test distribution equipment to verify integrity of extenders, matrix switches and distribution amps. You can test individual devices or entire networks including digital video cables.

## Verify Video at Far End

The 780C supports testing of installed distribution networks from the far-end at the display.



g: 1920 x 1080

## Format Analyzer – View metadata & timing




1920x1080p 60 VIC 16: No errors HDMI 30

#### Cable Test - Verify networks and cables

Test Remote	PRN 480pt	60 (8 bits): 0 erro 60 (8 bits): 0 erro Ilua: PASS		Signal Quality	sion: 13072100 (2 /: -22db, -21db, -2 de: HDBaseT		
Frame Capt	UTE CEC:	Rx PASS, Tx P		Cable length HDBaseT Rx	estimated to be < :	20 meters	
Frame Comp				Firmware Ver	Local into: sion: 13072100 (2 /: -22db21db2		
				Operation Mo			
				HDBaseT Rx			
					sion: 13072110 (2		
				Operation Mo		20 meters	
HDBaseT (8 bpc	720x480p 60.00 frames/s	VIC 2: No errors	HDMI 3D disabled	Operation Mo	de: HDBaseT	20 meters +5V detected	



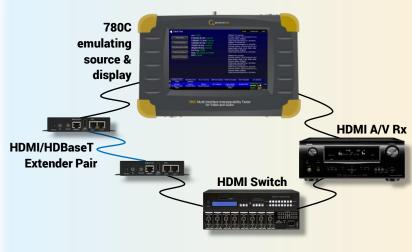

**Example Network Test Setup** 

# **SINK (DISPLAY) TEST & DIAGNOSTIC FEATURES**

#### **Verify Video**

Select from CEA, VESA & SMPTE formats or create your own custom formats including 4K resolutions for UHD testing. Use the test pattern library to verify specific video display elements. Set bit depth, pixel encoding, colorimetry and sampling parameters. Use industry standard patterns for color calibration. Create custom bitmap test patterns. Scroll bitmaps to test motion artifacts.

## **Verify EDID Contents**

Many interoperability problems are related to EDIDs. You can view the EDID contents of any connected display to verify its audio/video capabilities (including HDR elements). You can verify the structure of an EDID and check for compliance.

#### Video Test – Select formats & parameters

#### **Verify Audio**

You can use the 780C to verify audio on displays or audio systems using programmable LPCM test tones. Set sampling rate, bit depth, amplitude and number of channels. You can select Dolby and DTS compressed audio clips including Dolby TrueHD & DTS Master Audio.



#### **Verify HDCP Authentication**

HDCP authentication problems occur in complex digital video distribution networks. Use the HDCP test to quickly check HDCP 1.4 authentication. Enabling and disabling HDCP can quickly reveal the nature of an interoperability problem. Monitor the HDCP transactions during the HDCP test using the Auxiliary Channel Analyzer.

#### **Aux Channel Analyzer**

Aux Channe	I Analyzer					Home Prefere	nces Help						
Start	Save	Clear	Details			Auto Scroll			ЧОСВ	Authe	nticat	ion To	oct
imestamp	Туре	Data							HDCP	Autile	iititai		:5t
04:37.6282	DDC	U HDCP MASTER ->		97]		< HDCP Outp	of Tool				Home	Preferences	Help
						HDCP Outp	ut Test				Home	Fieldiences	нөр
									Bksv = 0x87A6AB8	B62			
							Disable		Bcaps = 0x83 (HDI			)	
									Generated An = 0x8		E69F		
141.8954	DDC	U HDCP_SLAVE >1	ASTER I2C HDCP Re:	iponse			Auto-Resta		Aksv = 0x292CFC5				
(43.2121	HPD	U Tx/U Port Falling E	198					11	R0 (0x1244) match	ed R0' (0x1244)			
		U Tx/U Port Rising Ed											
44.8017		U EDID MASTER >	SLAVE I2C E-EDID Se	gment 0									
044.8021		U EDID MASTER ->	SLAVE I2C Request O	ffset 0									
4:44.8024	DDC	U EDID SLAVE > M	ASTER I2C Response				Result: PASS		Check i Ri = 0x				
MI (8 bpc RGB)	3840x2160p 30 frames/s	HDMI_VIC 1: No errors	HDMI 3D disabled	AVMUTE disabled	HDC				Ri = 0x				
Interface: MI (8 bpc RGB)	Format: 3840x2160 30Hz	Pattern: Pseudo Random	3D: Disabled	Audio (HDMI): LPCM 2.0ch 48kHz	Ena								
						HDMI (8 bpc RGB)	3840x2160p 30.00 frames/s	Unknown	n HDMI 3D disabled	AVMUTE disabled	HDCP disabled	+5V detected	
						Unterface: HDMI (8 bpc RGB)	Format: 3840x2160 30Hz	Pattern: Color Ban		Audio (HDMI): LPCM 2.0ch	Disable HDCP		07:4

#### **HDMI**

Version	HDMI 2.0a				
Standard Formats	VESA (DMT, CVT-R, CVT), CEA (HDMI / DVI)				
Connector	(1) Type A Tx; (1) Type A Rx				
Video Colorimetry	ITU-R BT.601-5, ITU-R BT.709-5				
Video Max Pixel Rate	300MHz (3.00 Gbps/channel TMDS rate)				
Color Depths	8, 10, 12 bits				
Video Encoding / Sampling	RGB, YCbCr; 4:4:4, 4:2:2, 4:2:0				
HDCP	Version 1.4				
Audio Formats	LPCM, Dolby (DD, DD+, TrueHD), DTS (ES, HD, Master Audio)				
Audio LPCM Settings	Sampling rates (32 – 192 kHz); Bits per sample (16, 20, 24)				
HDBaseT					
Version	HDBaseT 1.0				
Standard Formats	VESA (DMT, CVT-R, CVT), CEA				
Connector	(1) 8P8C (RJ-45) Tx; (1) RJ-45 Rx				
Video Colorimetry	ITU-R BT.601-5, ITU-R BT.709-5				
Video Max Pixel Rate	300MHz				
Color Depths	8, 10, 12 bits				
Video Encoding / Sampling	RGB, YCbCr; 4:4:4, 4:2:2, 4:2:0				
HDCP	Version 1.4				
Audio Formats	LPCM, Dolby (DD, DD+, TrueHD), DTS (ES, HD, Master Audio)				
Audio LPCM Settings	Sampling rates (32 – 192 kHz); Bits per sample (16, 20, 24)				
3G-SDI					
Version – Standards	SMPTE 259M, 344M, 292M, 372M, 424M Level A (Level B is future)				
Connector	BNC 75 ohm				
video Colorimetry	ITU-R BT.601-5, ITU-R BT.709-5				
video Max Bit Rates	SDI: 360Mb/s; HD-SDI: 1.485Gbps; 3G-SDI: 2.97Gbps				
Encoding Bit Depths	10 bits/component				
video Encoding/Sampling	YCbCr - 4:2:2				
Audio Formats / Settings	8 Channel LPCM; Sampling rates (32 – 192 kHz); Bits per sample (16, 20, 24)				
Digital Audio					
Connectors	Optical (JIS FOS); SPDIF (RCA)				
Audio Formats	LPCM, Dolby (DD, DD+), DTS (ES, HD)				
Audio LPCM Settings	Sampling rates (32 – 192 kHz); Bits per sample (16, 20, 24)				
Analog Video	Sampling rates (32 T32 kn2), bits per sample (10, 20, 24)				
Connectors	VGA HD-15				
Format Standards	VESA, CEA				
Video Encoding	RGB, YPbPr				
Max Pixel Rate	80MHz (higher resolutions supported through pixel repetition)				
Options					
Auto EDID Test	Run automated EDID test on source devices				
Cable Test	Test digital video cables and video distribution networks				
ACA Monitor	Monitor aux channel transactions emulating a source or sink or passively				
Report File Creation NEW!	Provides HTML formatted report of tests performed				
nstrument					
AC Adapter	100-240 VAC, 47-63Hz				
Weight	3.25 LBS; 1.47 Kg				
Embedded Display	800 (H); x 480 (V) resolution; 24 bit RGB color.				
Size	Height: 2.7 in. (6.98 cm) Width: 9.75 in. (24.76 cm) Depth: 6 in. (15.24 cm)				
Command Line Control	USB Type B, RS-232				
Environmental	Operating Temp: 32 to 104 (F); 0 to 40 (C)				
File Access	USB Type B (command line / file transfer; SD Card (upgrades / file transfer)				
	1-800-909-7211 Local sales offices are located throughout the world.				
	1-800-909-7211 Local sales offices are located throughout the world.				

©2016 Teledyne LeCroy. All rights reserved. Specifications, prices, availability and delivery subject to change without notice. Product or brand names are trademarks or requested trademarks of their respective holders.