

# Water Blue FAKRA Jack to BNC Male Cable Using RG174 Coax

The FAKRA Code / Water Blue jack to BNC male cable using RG174 coax, part number FMCA1345, from Fairview Microwave is in-stock and ships same day. This Fairview FAKRA to BNC cable assembly has a jack to male gender configuration with 50 ohm flexible RG174 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1345 FAKRA jack to BNC male cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

## **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	DC	_	1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.1 [ <mark>102.0</mark>	3]	pF/ft [pF/m]

# Performance by Frequency

=	-	-				
Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Max.)	1.04	1.08	1.14	1.21	1.32	dB/ft
	3.41	3.54	3.74	3.97	4.33	dB/m
Insertion Loss (Typ.)	0.242	0.284	0.337	0.412	0.52	dB/ft
	0.79	0.93	1.11	1.35	1.71	dB/m

#### **Mechanical Specifications**

Cable Assembly Diameter

Diameter

#### Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Jacket Material Jacket Diameter

#### 0.57 in [14.48 mm]

RG174 50 Ohms Stranded Copper Clad Steel, Silver PE (LD) 1 Tinned Copper Braid PVC, Black 0.11 in [2.79 mm]

Tel: 1-800-715-4396 / (972) 649-6678

Fairview Microwave

Lewisville, TX 75056

Fax: (972) 649-6689 www.fairviewmicrowave.com

301 Leora Ln., Suite 100

# FMCA1345 DATA SHEET

# **Configuration:**

- FAKRA Jack
- BNC Male
- RG174

# **Features:**

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

# **Applications:**

- General Purpose
- Laboratory Use

Fairview Microwave

an INFINIT<sup>®</sup> brand



#### Connectors

Description	Connect	or 1	Connector 2		
Туре	FAKRA J	ack	BNC Male		
Configuration	Straigh	nt	Straight		
Specification			MIL-STD-348A		
Impedance	50 Ohn	าร	50 Ohms		
Contact Material & Plating	Phosphor Bror	ze, Gold	Brass, Gold		
Contact Plating Spec.			50µ in. minimum		
Dielectric Type	PTFE		Teflon		
Outer Cond Material & Plati	ng Brass, Nie	ckel			
Body Material & Plating	Plastic	;	Brass, Nickel		
Body Plating Spec.			100µ in. minimum		
Coupling Nut Material & Pla	iting		Brass, Nickel		
Coupling Nut Plating Spec.			100µ in. minimum		

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8''$ , whichever is greater.

## **Environmental Specifications**

**Temperature** Operating Range

-40 to +80 deg C

# **Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**



Example: FMCA1345-12 = 12 inches long cable FMCA1345-100 cm = 100 cm long cable





Water Blue FAKRA Jack to BNC Male Cable Using RG174 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: Water Blue FAKRA Jack to BNC Male Cable Using RG174 Coax FMCA1345

URL: https://www.fairviewmicrowave.com/fakra-jack-bnc-male-cable-rg174-coax-fmca1345-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave necessary to make any representation or warraty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689



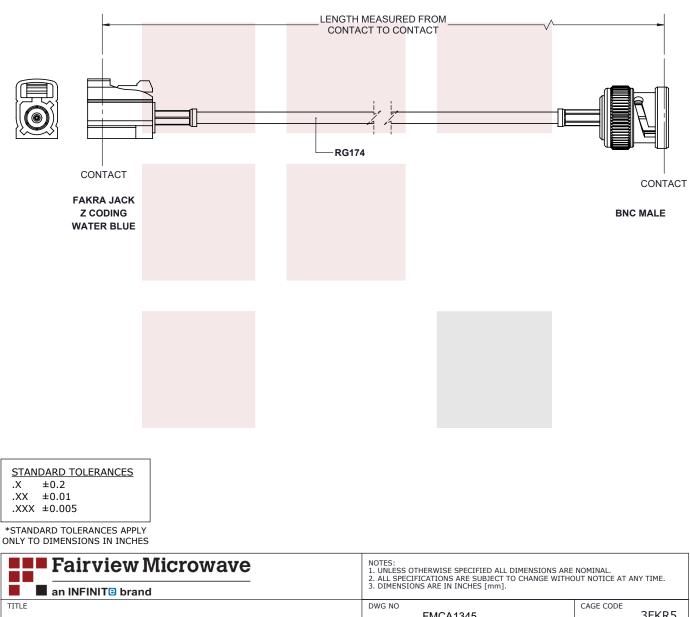

Water Blue FAKRA Jack to BNC Male Cable Using RG174 Coax

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].								
DWG NO FMCA1345					CAGE CODE 3FKR5			
CAD FILE	09/21/19	SHEET	1 OF 1	SCALE N/A		SIZE A	7361	

FMCA1345 DATA SHEET

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689