


HBL7464V -- Twist-Lock Valise Connector Body




2P2W, 15A 125V, ML-1R, Black Nylon

Product Specifications

Product Type	 <p style="text-align: center;">Twist-Lock Devices</p>
Product Item	Plug
Wiring Scheme	2 Pole, 2 Wire Non-Grounding
Amperage	15A
Voltage	125V AC
NEMA Configuration	ML-1P
Item Style	Valise
Device Color	Black
Cord Dia.	.218"-.375" (5.5-9.5)
Housing Material	Black nylon
Terminal Clamp Material	Cold rolled steel-nickel-plated
Terminal Screw Material	#8-32 Steel (copper flash, nickel plate & molykote)
Cord Clamp Screw Material	Steel - zinc plated Multi-drive
Body Holding Screw Material	Steel, zinc plated Multi-drive
Ratings	Molded into face

Dielectric Voltage Withstand	2,000V minimum
Current Interrupting	Certified for current interrupting at full rated current.
Temperature Rise	Max 30C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of .75.
Cord Accommodation	Round portable service cords of diameters commensurate with the device rating as defined in UL Standard 62, CSA C22.2 No. 49.
Terminal Accommodation	15A #14AWG
Terminal Identification	Terminals identified in accordance with UL 498 (X, Y, Z, White,)
Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Operating Temperatures	Maximum Continuous 75 C Minimum -40 C (w/o impact)
Moisture Resistance	IP20
Listings	UL
Catalog Page	Click here for catalog page B2
Brochures	Click here for product brochure
Hubbellnet	Click here for Hubbellnet
Catalog Section	Click here for Section-B
UPC Number	78358523725
Weight in LBs	0.1

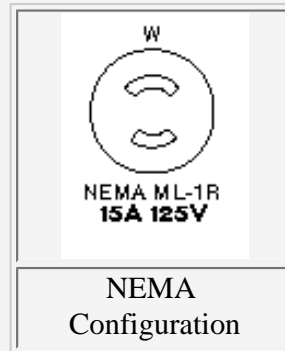

TWIST-LOCK® Devices


2 Pole, 2 Wire, Non-Grounding

15 Ampere, 125 Volts

Midget TWIST-LOCK Flanged Receptacle, Plug, Connector Body and Flanged Inlet




HBL7468



HBL7465V



HBL7464V



HBL7466, HBL7467



HBL4890



HBL7459V



Flanged Receptacle

Description	Catalog Number
Stainless steel flange, exposed terminals.	HBL7468

Male Plug IP20 SUITABILITY

Description	Cord Dia.	Catalog Number
Valise® plug, black nylon.	.220"-.385" (5.6-9.8)	HBL7465V

Connector Body IP20 SUITABILITY

Description	Cord Dia.	Catalog Number
Valise connector body, black nylon, polarized.	.220"-.385" (5.6-9.8)	HBL7464V -

Flanged Inlets

Description	Catalog Numbers
Stainless steel flange, polarized, exposed terminals.	- HBL7467
Stainless steel flange, not polarized, exposed terminals.	- HBL7466

Weatherproofing Accessories

Description	Catalog Numbers
Seal-tite® cover, black elastomer, for use with a HBL7465V when used with a HBL7464V connector body or a HBL7464V connector when used with a flanged inlet.	HBL7490V** *
Seal-tite cover, black elastomer, for use with a HBL7464V connector body and combination of HBL7465V plug and HBL7490V cover.	HBL7459V** *
Closure cover for use with HBL7466 or HBL7467. Bead chain is nickel-plated.	HBL4890 *

** IP55 suitability when installed and used properly with plug and connector

body combinations.

* Not UL Listed.



HBL7490V