

Surface Mount Type **SP-Cap**

Series: **S**




■ **Features**

- Super Low-ESR (4.5 mΩ to 9 mΩ)
- Lower ESR and Higher Capacitance at the same case size as conventional products.
- Excellent Noise-absorbent Characteristics
- High Ripple Current
- RoHS directive compliant

■ **Specifications**


Series & Size Code	SL		SX	
Category Temp. Range	-40 °C to +105 °C			
Rated W.V.Range	2 V.DC to 6.3 V.DC			
Nominal Cap.Range	56 μF to 220 μF		82 μF to 560 μF	
Capacitance Tolerance	±20 %			
DC Leakage Current	Reflow 240 °C : I ≤ 0.06 CV (μA) 2 minutes (2 V.DC to 4 V.DC) I ≤ 0.04 CV (μA) 2 minutes (6.3 V.DC) Reflow 260 °C : I ≤ 0.1 CV (μA) 2 minutes			
tan δ	≤ 0.06 (120 Hz/+20 °C)			
Surge Voltage	Rated Working Voltage × 1.25 (15 °C to 35 °C)			
Endurance	After applying rated working voltage for 1000 hours at 105 °C±2 °C, and then being stabilized at +20 °C, capacitor shall meet the following limits.			
	Capacitance change	±10% of initial measured value		
	tan δ	≤ Initial specified value		
	DC leakage current	≤ Initial specified value		
Moisture resistance	After storing for 500 hours at 60 °C, 90 %			
	Capacitance change of initial measured value	2, 2.5 V.DC	4 V.DC	6.3 V.DC
		+70, -20 %	+60, -20 %	+50, -20 %
	tan δ	≤ 200 % of initial specified value		
	DC leakage current	≤ Initial specified value		

■ **Marking**

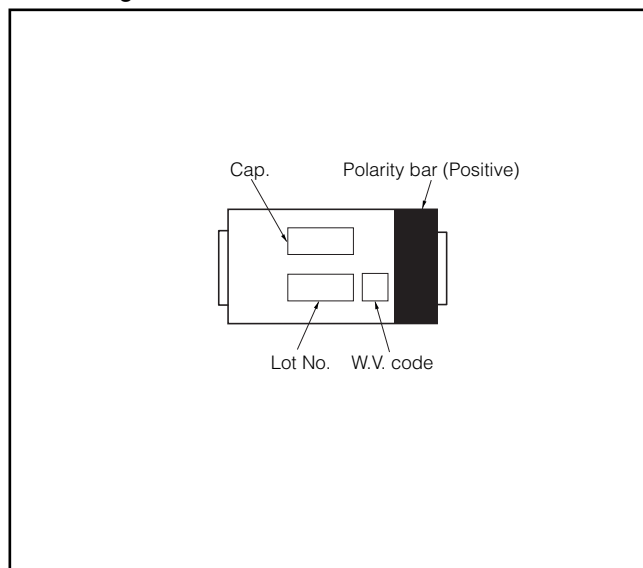

■ **Dimensions in mm(not to scale)**

(Unit : mm)

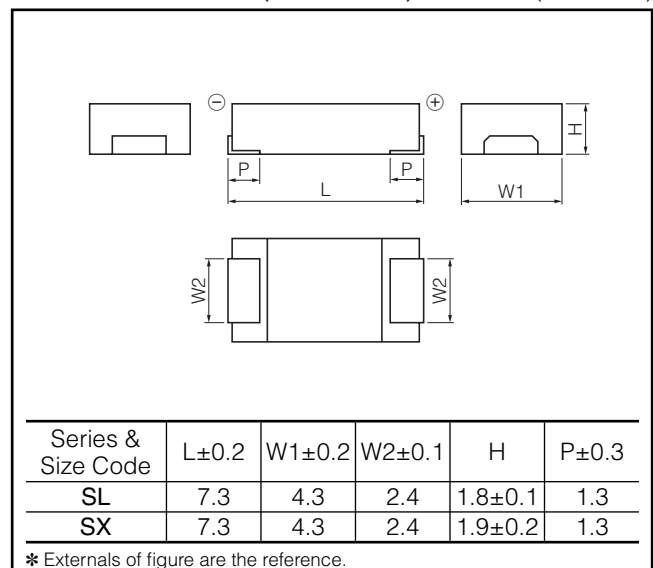

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Low ESR Products

○ : available, — : not available

Series & Size Code	Rated W.V. (V.DC)	Capacitance (±20%) (μF)	Case Size			Specification		Part number	Reflow condition		Min. Packaging Q'ty (pcs)
			L (mm)	W (mm)	H (mm)	*1 Ripple current (Ar.m.s.)	*2 ESR (mΩ max.)		240 °C *3	260 °C *3	
SL	2	100	7.3	4.3	1.8	3.0	9	EEFSL0D101ER	*4	○	3500
		120	7.3	4.3	1.8	3.0	9	EEFSL0D121ER	*4	○	3500
		150	7.3	4.3	1.8	3.0	9	EEFSL0D151ER	*4	○	3500
		180	7.3	4.3	1.8	3.0	9	EEFSL0D181ER	*4	○	3500
		220	7.3	4.3	1.8	3.0	9	EEFSL0D221ER	*4	○	3500
	2.5	100	7.3	4.3	1.8	3.0	9	EEFSL0E101ER	*4	○	3500
		120	7.3	4.3	1.8	3.0	9	EEFSL0E121ER	*4	○	3500
		150	7.3	4.3	1.8	3.0	9	EEFSL0E151ER	*4	○	3500
	4	82	7.3	4.3	1.8	3.0	9	EEFSL0G820ER	*4	○	3500
	6.3	56	7.3	4.3	1.8	3.0	9	EEFSL0J560R *5	○	—	3500
SX	2	180	7.3	4.3	1.9	3.0	9	EEFSX0D181ER	*4	○	3500
		220	7.3	4.3	1.9	3.0	9	EEFSX0D221ER	*4	○	3500
		270	7.3	4.3	1.9	3.0	9	EEFSX0D271ER	*4	○	3500
			7.3	4.3	1.9	3.5	6	EEFSX0D271XE	*4	○	3500
			7.3	4.3	1.9	3.8	4.5	EEFSX0D271E4	—	○	3500
		330	7.3	4.3	1.9	3.0	9	EEFSX0D331ER	*4	○	3500
			7.3	4.3	1.9	3.5	6	EEFSX0D331XE	*4	○	3500
			7.3	4.3	1.9	3.8	4.5	EEFSX0D331E4	—	○	3500
		390	7.3	4.3	1.9	3.0	9	EEFSX0D391ER	*4	○	3500
			7.3	4.3	1.9	3.5	6	EEFSX0D391XE	*4	○	3500
			7.3	4.3	1.9	4.0	4.5	EEFSX0D391E4	—	○	3500
		470	7.3	4.3	1.9	3.0	9	EEFSX0D471ER	*4	○	3500
			7.3	4.3	1.9	3.5	6	EEFSX0D471XE	*4	○	3500
			7.3	4.3	1.9	4.0	4.5	EEFSX0D471E4	—	○	3500
		560	7.3	4.3	1.9	3.8	4.5	EEFSX0D561E4	—	○	3500
	2.5	150	7.3	4.3	1.9	3.0	9	EEFSX0E151ER	*4	○	3500
		180	7.3	4.3	1.9	3.0	9	EEFSX0E181ER	*4	○	3500
		220	7.3	4.3	1.9	3.0	9	EEFSX0E221ER	*4	○	3500
			7.3	4.3	1.9	3.5	7	EEFSX0E221E7	—	○	3500
		270	7.3	4.3	1.9	3.5	7	EEFSX0E271E7	—	○	3500
		330	7.3	4.3	1.9	3.0	9	EEFSX0E331ER	*4	○	3500
			7.3	4.3	1.9	3.5	6	EEFSX0E331XE	*4	○	3500
			7.3	4.3	1.9	4.0	4.5	EEFSX0E331E4	—	○	3500
		390	7.3	4.3	1.9	3.0	9	EEFSX0E391ER	*4	○	3500
			7.3	4.3	1.9	3.5	6	EEFSX0E391XE	*4	○	3500
			7.3	4.3	1.9	4.0	4.5	EEFSX0E391E4	—	○	3500
		470	7.3	4.3	1.9	3.0	9	EEFSX0E471ER	—	○	3500
			7.3	4.3	1.9	3.5	6	EEFSX0E471XE	—	○	3500
			7.3	4.3	1.9	3.8	4.5	EEFSX0E471E4	—	○	3500
		4	82	7.3	4.3	1.9	3.0	9	EEFSX0G820ER	*4	○
	100		7.3	4.3	1.9	3.0	9	EEFSX0G101ER	*4	○	3500
			7.3	4.3	1.9	3.0	9	EEFSX0G151ER	—	○	3500
	150		7.3	4.3	1.9	3.5	7	EEFSX0G151E7	—	○	3500
			7.3	4.3	1.9	3.0	9	EEFSX0G181ER	—	○	3500
	220		7.3	4.3	1.9	3.0	9	EEFSX0G221ER	—	○	3500
	6.3		120	7.3	4.3	1.9	3.5	7	EEFSX0J121E7	—	○
		150	7.3	4.3	1.9	3.0	9	EEFSX0J151ER	—	○	3500

*1: Ripple current (100 kHz/ +20 to +105 °C), *2: ESR (100 kHz/+20 °C)

*3: Please refer to the page of "Mounting Specifications".

*4: Please use high temperature Lead-Free reflow (260 °C) for new design.

*5: In the case of new design please contact us.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.