

PT-104 Data Logger


Temperature, Resistance, Voltage

The ultimate in resolution and accuracy

0.001 °C

0.01 °C

- Measures and records up to 4 platinum resistance thermometers
- Works with PT100 and PT1000 sensors
- Supports 2, 3 and 4-wire sensors
- Measures voltage and resistance
- 24-bit ADC
- Uses calibrated reference resistors for stability
- Supplied with PicoLog data logging software
- USB interface ensures easy installation
- Ethernet interface for remote operation
- Powered by USB port or Power-over-Ethernet (PoE)
- Multiple units can be run on a single PC

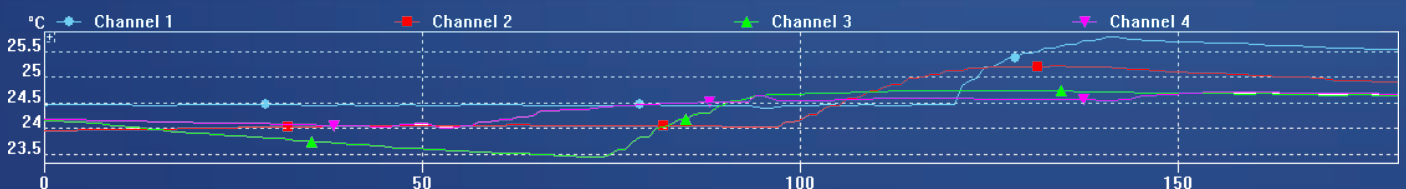

USB PT-104 PRT Data Logger



Flexible: Measures temperatures with either PT100 or PT1000 sensors, as well as resistance and voltage.

Adaptable: Can measure and record temperatures ranging from $-200\text{ }^{\circ}\text{C}$ to $+800\text{ }^{\circ}\text{C}$.

Stable: Instead of voltage references, which tend to drift with temperature, the PT-104 uses high-precision reference resistors.


Expandable: Up to 20 units can be used simultaneously on one PC.

Portable: The PT-104 obtains its power from either the USB port or Power-over-Ethernet (PoE), so no additional power cable is needed.



PicoLog

PicoLog is a powerful and flexible data acquisition program designed for collecting, analyzing and displaying data over long or short periods of time. Data can be viewed both during and after data collection in spreadsheet or graphical format. If required, the data can also be easily exported to other applications.

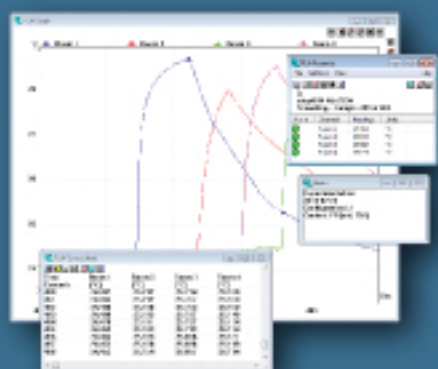

In addition to the monitor view, PicoLog can also display a graph, a spreadsheet and user notes. It can display them all at once, as shown here, or individually in any combination.

Software drivers

For users who wish to write their own software or use our products with third-party software, we provide, free of charge, a range of software drivers and examples. Drivers are included for Windows XP (SP2), Vista and Windows 7. Programming examples are supplied for C, LabVIEW and Excel.

ORDER CODES and I

CODE	DESCRIPTION
PP682	PT-104 Data Logger
PP660	Screw Terminal Adapter
SE011	PT-100 Temperature Sensor

* Dollar and euro prices were correct at the time of printing.
For latest prices see our website or contact us at the address below.

Specifications

	Temperature	Resistance	Voltage
Sensor	PT100, PT1000	N/A	N/A
Range	-200 to $+800\text{ }^{\circ}\text{C}$	0 to $375\ \Omega$ 0 to $10\ \text{k}\Omega$	0 to $115\ \text{mV}$ 0 to $2.5\ \text{V}$
Linearity	20 ppm	20 ppm	20 ppm
Accuracy at $25\text{ }^{\circ}\text{C}$	$0.01\text{ }^{\circ}\text{C}$	20 ppm	0.2% ($2.5\ \text{V}$)
Temp. coefficient	5 ppm/ $^{\circ}\text{C}$	5 ppm/ $^{\circ}\text{C}$	100 ppm/ $^{\circ}\text{C}$
RMS noise with filter	$0.01\text{ }^{\circ}\text{C}$	10 ppm	10 ppm
Resolution	$0.001\text{ }^{\circ}\text{C}$	1 $\mu\Omega$	0.156 μV
Overload protection	$\pm 30\ \text{V}$		
Number of inputs	4		
Converter resolution	24 bits		
Conversion time	720 ms per channel		
Input connectors	4-pin mini DIN		
Input impedance	$\gg 1\ \text{M}\Omega$		
Output connectors	USB & Ethernet		
Power supply	USB or Ethernet		
Temperature range	$20\text{ }^{\circ}\text{C}$ to $30\text{ }^{\circ}\text{C}$ for stated accuracy $0\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$ operating $-20\text{ }^{\circ}\text{C}$ to $+80\text{ }^{\circ}\text{C}$ storage		
Humidity range	20% to 90% RH, non-condensing, operating 5% to 95% RH, non-condensing, storage		
Dimensions	184 x 135 x 36 mm (5.31 x 7.24 x 1.42 in.)		



Screw-terminal adapter

Connects discrete wires to the PT-104 without soldering. Suitable for wire-ended sensors and custom circuits.



SE011
General-purpose probe

Many other types available!

PRTs

Pico Technology offers a range of platinum resistance thermometers (PRTs) for use with the PT-104. The PT-104 is compatible with all standard PT100 and PT1000 PRTs, which offer high accuracy, resolution and stability. All our probes have a stainless steel body and a 1 m long cable.

For full information on PRT specifications, characteristics and prices, go to :

accessories.picotech.com

and click "Sensors".